



HyFilm® LEO EPD

Extended Performance Diesel

Are you using imperial engine oil in a metric engine?

If you've ever busted your knuckles trying to use a standard wrench on metric hardware, you know that choosing the wrong tool for the job can be a pain. The same holds true for engine oils. Mercedes Sprinter vans and other European light diesel fleet vehicles are quickly making inroads in the US, but finding the right engine oil to meet their needs can be a challenge. HyFilm LEO EPD is designed to meet and exceed the requirements of key European manufacturers so that your fleet performs the way it was meant to day in and day out. Extend the performance of your diesel fleet with HyFilm LEO EPD.

BENEFITS


- **Meets key European specifications**
- **Superior engine cleanliness and sludge control**
- **Protects engines better against wear**
- **Compatible with exhaust aftertreatment systems**
- **Extends service intervals**
- **Improves fuel economy**
- **All-season 5W-30 formula**



HYFILM LEO EPD VS. ACEA C3-16


The ACEA is the European Automobile Manufacturers' Association (Association des Constructeurs Européens d'Automobiles). They define engine oil specifications used by all major European vehicle manufacturers. ACEA C3-16 is a common diesel engine oil specification used by European manufacturers. HyFilm LEO EPD exceeds the requirements of this specification in several key categories:

Engine Cleanliness

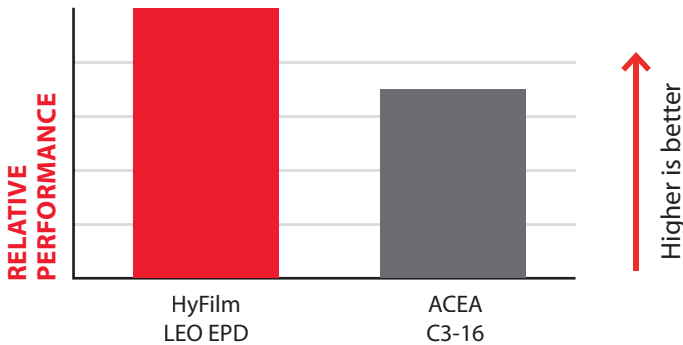

Combustion byproducts and lubricant oxidation can cause engine sludge. Sludge can clog filters and starve key components of lubrication. HyFilm LEO EPD contains powerful dispersants and anti-oxidants that prevent sludge, keeping your engine clean and extending oil life.

Wear Protection

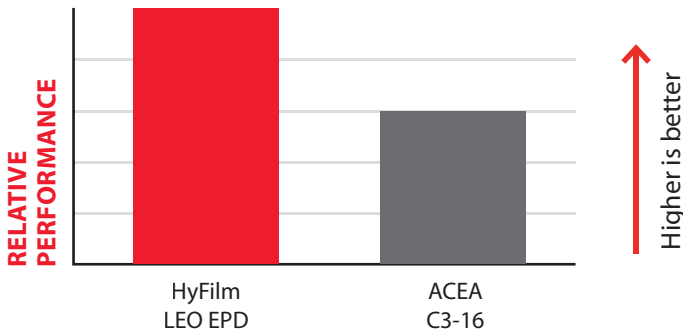

Engine wear results in decreased fuel economy, decreased performance, and shortened engine life. HyFilm LEO EPD prevents wear with a multi-weight formula that maintains lubrication across wide operating temperatures and an anti-wear additive package that creates a protective coating on engine components.

About Hydrotex®

Hydrotex® is a manufacturer and distributor of high performance lubricant and fuel improver solutions. As an employee owned company, we help our customers develop sustainable solutions designed to help improve system reliability, save energy, limit pollution, extend fixed asset life, reduce maintenance costs and improve fuel efficiency. Our products and services leverage over 80 years of innovation resulting in superior lubrication solutions.

Aftertreatment

Modern diesel engines make use of Diesel Particulate Filters and catalysts to reduce emissions. Using the wrong engine oil can damage this equipment resulting in failed emissions tests, fuel and performance hogging DPF regeneration, and maintenance issues. HyFilm LEO EPD's carefully selected additive package is designed for compatibility with exhaust aftertreatment equipment, keeping your fleet out of the shop and on the road.

Extends Service Intervals

HyFilm LEO EPD is designed to outlast competitors. Its shear stable formula maintains its viscosity for consistent lubrication over the life of the oil. With its wear preventative additives, anti-oxidants, and dispersants, HyFilm LEO EPD can be changed less frequently saving time and money on oil changes while still providing the protection your engines need. Ask your Hydrotex representative about how oil sampling and analysis can safely extend drain intervals for your fleet.

Fuel Economy

HyFilm LEO EPD's 5W-30 formula can reduce fuel consumption up to 2% compared to a 15W-40 engine oil. Over the life of a vehicle this adds up to significant savings and emissions reductions, protecting both your bottom line and the environment.

HYFILM LEO EPD MEETS AND EXCEEDS* SEVERAL OTHER SPECIFICATIONS INCLUDING:

- ACEA C3-16
- API SN (useful for mixed gasoline and diesel fleets)
- Mercedes Benz 229.31
- Mercedes Benz 229.51
- Volkswagen VW 504.00
- Volkswagen VW 507.00
- BMW Longlife-04
- Porsche C30

*Meets or exceeds specifications. Not formally approved by manufacturer or governing body.

The Hydrotex Warranty

When properly stored and used in accordance with instructions, any material not satisfactory will be replaced with any product in our line on a dollar for dollar basis provided the account is paid in full when due, and Hydrotex is notified, in writing, within 12 months of the date of the order by the customer.

CONSULTANT NOTES

HYDROTEXLUBE.COM 800.527.9439