

51.2V 105Ah CUBIC




GENERAL	
Nominal Voltage	51.2V
Working Voltage	41.6V-58.4V
Recommended Voltage	48.0V-57.0V
Cell Count	16
Nominal Capacity	105Ah
Energy	5376Wh
Reserve @25A	252 Minutes
Self Discharge	1% Per Month
IP Rating	IP65

CHARGING	
Recom.Charging Current	50A
Max Charging Current	100A
Bulk/Absorb Voltage	57.0V
BMS High Voltage Cutoff	58.4V
Charging Temp. Range	32F to 113F

DISCHARGING	
Max Continuous Discharge	300A
Max Discharge 0.2Sec	1000A
Max Discharge 10 Sec	500A
Short Circuit Protection Current	2000A
BMS Voltage Cutoff	41.6V
BMS Voltage Recovery	48.0V
DISCHARGE TEMP RANGE	- 4F to 149F

COMMUNICATION	
Bluetooth	YES
CAN	YES
485	YES
APP	YES
Computer	YES

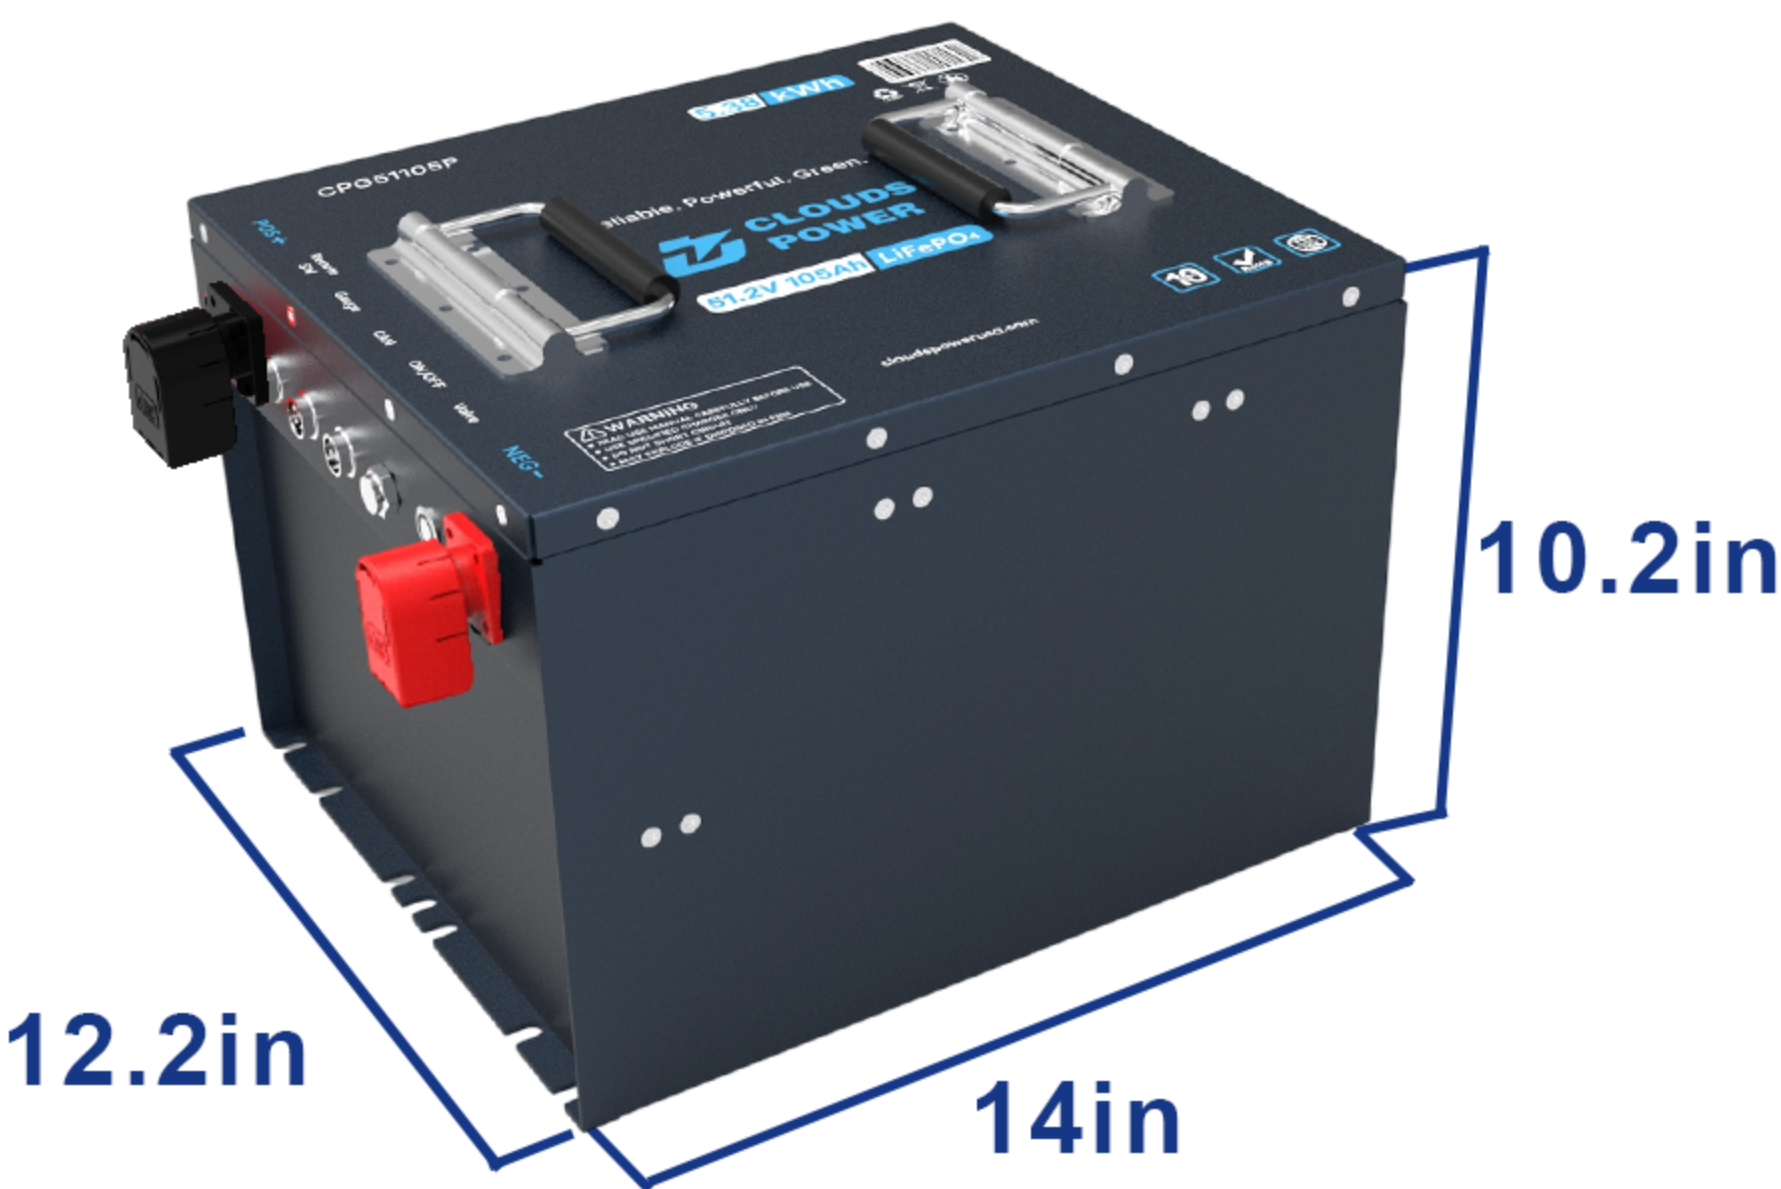

Weight: 101.4lbs

SAFETY	
Charging Freeze Protection	YES,Under32F
Pack Over-Voltage	YES
Cell Balancing	YES
Pack Under-Voltage	YES
Cell Under-Voltage	YES
Cell Over-Temp	YES
BMS Over-Temp	YES
Short Circut/Over Current	YES
Certifications	UN38.3 MSDS CE UL(cell)
Report	UL2580

PHYSICAL	
Cell Chemistry	LFP
Cell Type	Square aluminum shell
Cell Cnfiguration	16S1P
Series Connectable	NO
Parallel Connectable	Yes , up to 2
Weight	46kg/101.4 lbs
Dimension LxWxH	14×12.2×10.2in
Terminal Type	Bolted connection
Shell Type	Q235
UN Shipping Class	UN3480

