


AMERICAN FIREGLASS

FIRE PIT S.I.T. SYSTEMS (Smart Ignition Technology)

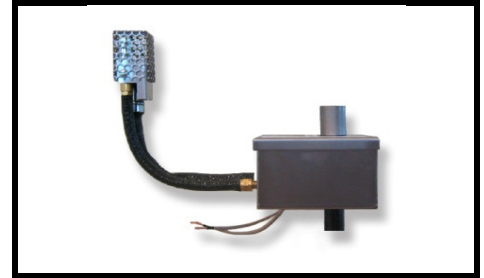

SPECIFICATIONS

	Standard Capacity	High Capacity
Natural Gas Part #	AFG-SITS-N-SC	AFG-SITS-N-HC
Propane Part #	AFG-SITS-P-SC	AFG-SITS-P-HC
Flame Sensor	Thermopile	Thermopile
Ignition Type	Hot Surface Ignition	Hot Surface Ignition
Ignition Sequence	Intermittent Pilot	Intermittent Pilot
Ignition Source	Pilot	Pilot
Max. BTU Output	290k BTU/hr	512 BTU/hr
Inlet/Outlet Size	1/2" FPT	3/4" FPT
Operating Voltage	24 volts AC	24 volts AC
Max. Inlet Pressure	2.0 psi	2.0 psi
Valve Enclosure Size	4 3/8" x 4 3/8" x 4 3/8"	4 1/2" x 4 1/2" x 5"

All systems include the following hardware/fittings:

S.I.T System, 24v Transformer, Safety Shut-Off Valve, Key Valve, 16" & 28" Stainless Steel Gas Flex Lines

Specifications subject to change without notice.

We recommend that our products be installed and serviced by professionals who are certified in the U.S. by the National Fireplace Institute (NFI) as NFI Specialists or who are certified in Canada by Wood Energy Technical Training (WETT). Installation must conform with local codes or, in the absence of local codes, with the National Fuel Gas code, ANSI Z223.1/ Latest Edition

American Fireglass, Inc.

570 Third Street, Lake Elsinore, CA 92530

Phone (888) 264-1017 Fax (888) 679-3149 www.AmericanFireglass.com