

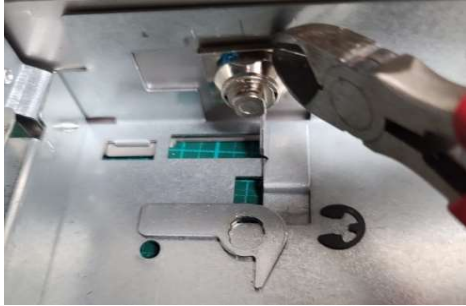



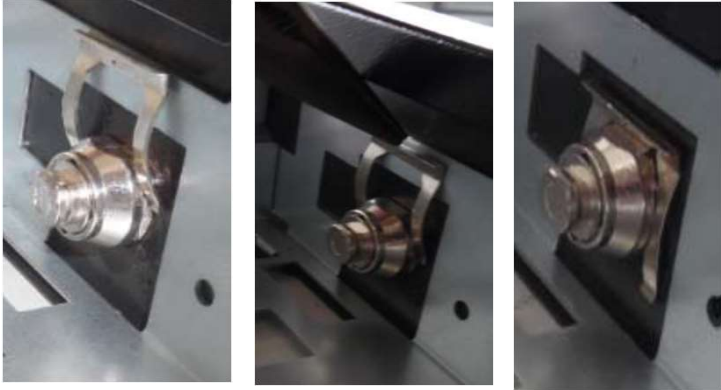





HK SYSTEMS Cash Drawer Instruction for Changing Key and Lock

Step	Content	Picture	Description	Remark
1	Disassemble E ring		Take out the E ring with plier	
2	Disassemble the locking plate		Take out the locking plate with plier	
3	Disassemble the fixed plate		Take out the fixed plate with plier	
4	Take out the lock body		Take out the lock body	

HK SYSTEMS Cash Drawer Instruction for Changing Key and Lock

Step	Content	Picture	Description	Remark
1	Preparation		Assemble the lock body with the ornament ring as shown in the left picture and planish the fixed plate with plier	
2	Assemble the lock body		Put the lock body into the locking hole	
3	Assemble the fixed plate		Put the fixed plate (by using plier) into the lock body's groove as shown in the pictures.	

HK SYSTEMS Cash Drawer Instruction for Changing Key and Lock

Step	Content	Picture	Description	Remark
4	Assemble the locking plate		Put the locking plate on the lock body as shown in the picture.	
5	Assemble the E ring		Put the E ring by using the plier on lock body as shown in the picture.	
6	Finish the lock assembling		Finish the lock assembling	