


RS-232 PROTOCOL

The TVC Series of scales can be ordered with a standard RS-232 output.

Specifications:


- RS-232 output of weighing data
- ASCII code
- 1200-115200 Baud
- 8 data bits
- No Parity

Connector: 9 pin socket

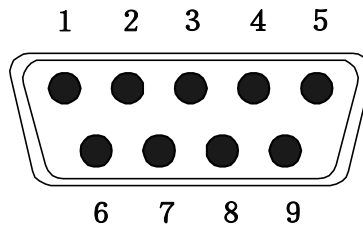


| | | | |
|-------|-----|--------|-------------------|
| Pin 2 | RXD | Input | Receiving data |
| Pin 3 | TXD | Output | Transmission data |
| Pin 5 | GND | — | Signal ground |

9pin D Connector:

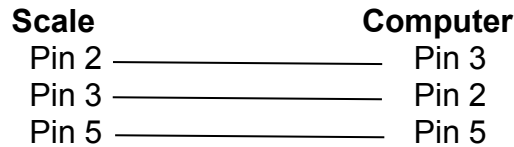

Continuously output protocol

Con1:

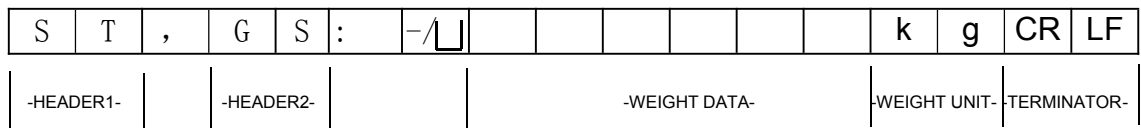

HEADER1: ST=STABLE, UT=UNSTABLE
 HEADER2: NT=NET, GS=GROSS

Print formats

net: 2.0000 lb

u.wt: 0.1000 lb

Pcs: 20 pcs

Receipt Format

net: 2.0000 lb

u.wt: 0.1000 lb

Pcs: 20 pcs

Label Format