

Variants

Front-facing

Wall or standing



Metal case with illuminated logo


- ✓ Indoor / Outdoor
- ✓ Plug & play
- ✓ Wall-mounted or standing
- ✓ Default single-sided

€€

See p. 7

Projecting

90 degrees

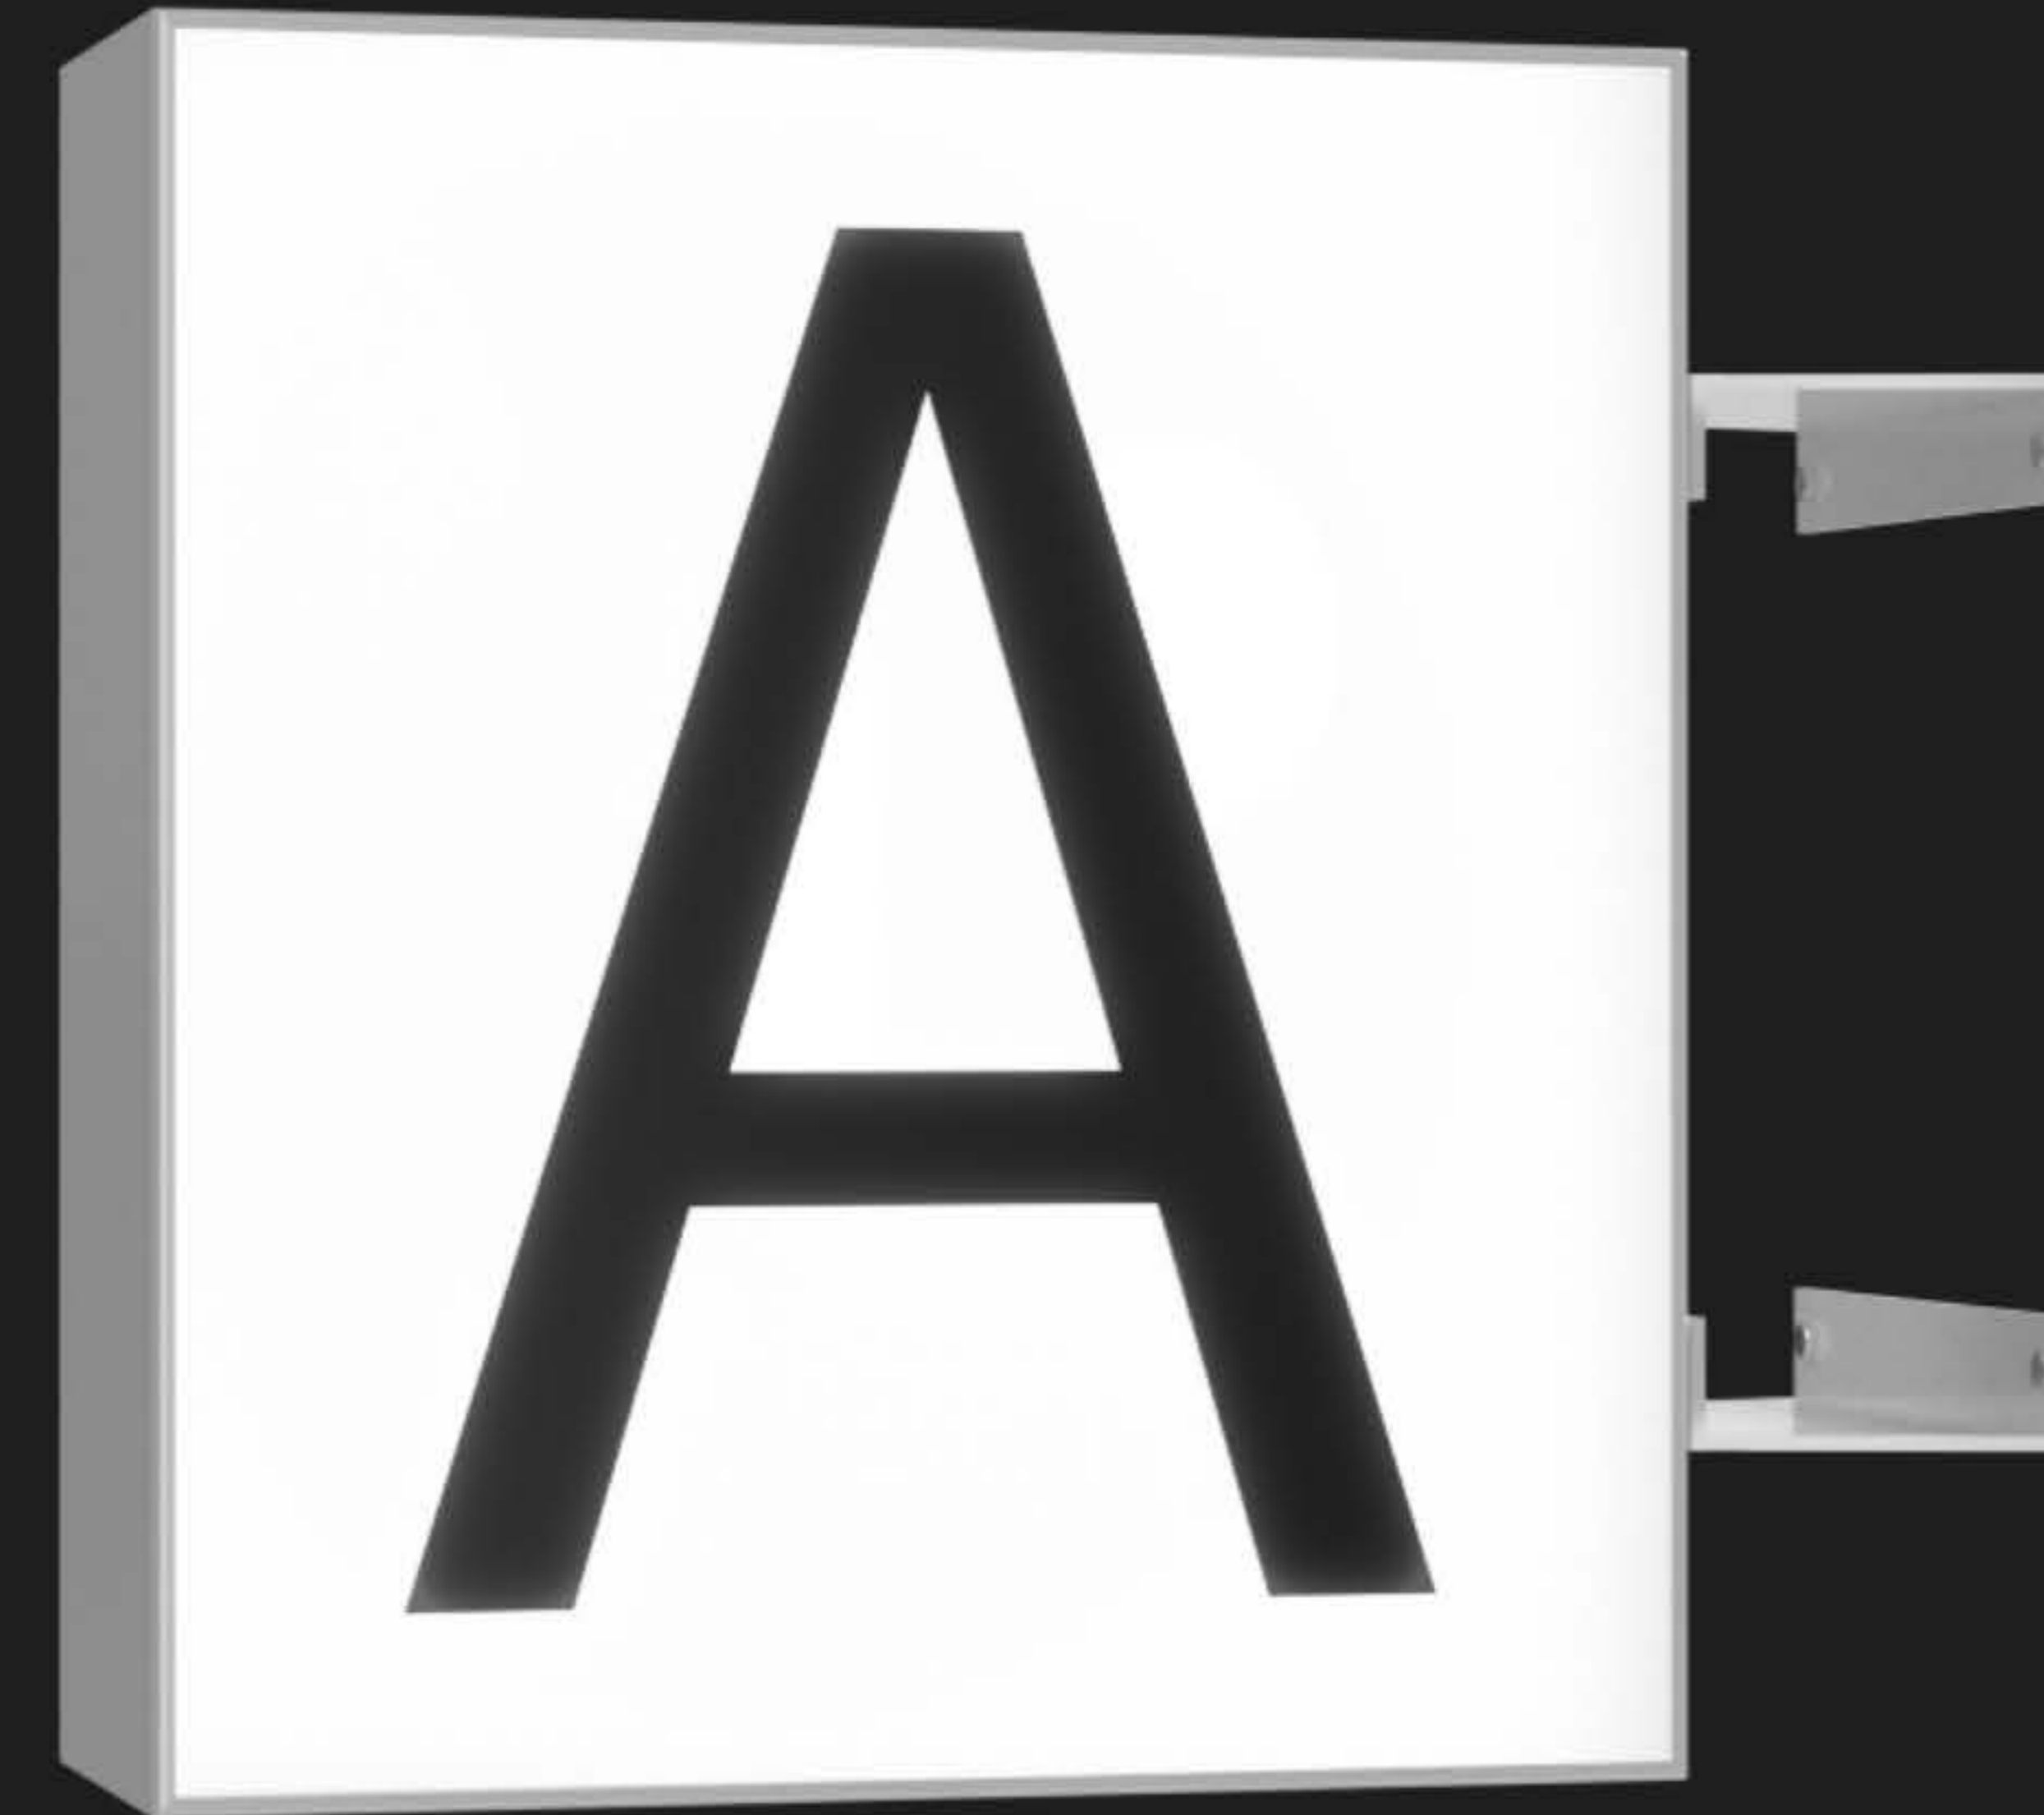

Metal case with illuminated logo


- ✓ Indoor / Outdoor
- ✓ Plug & play
- ✓ Wall-mounted
- ✓ Default double-sided

€€€


See p. 8

Lightbox styles

Classic Lightbox

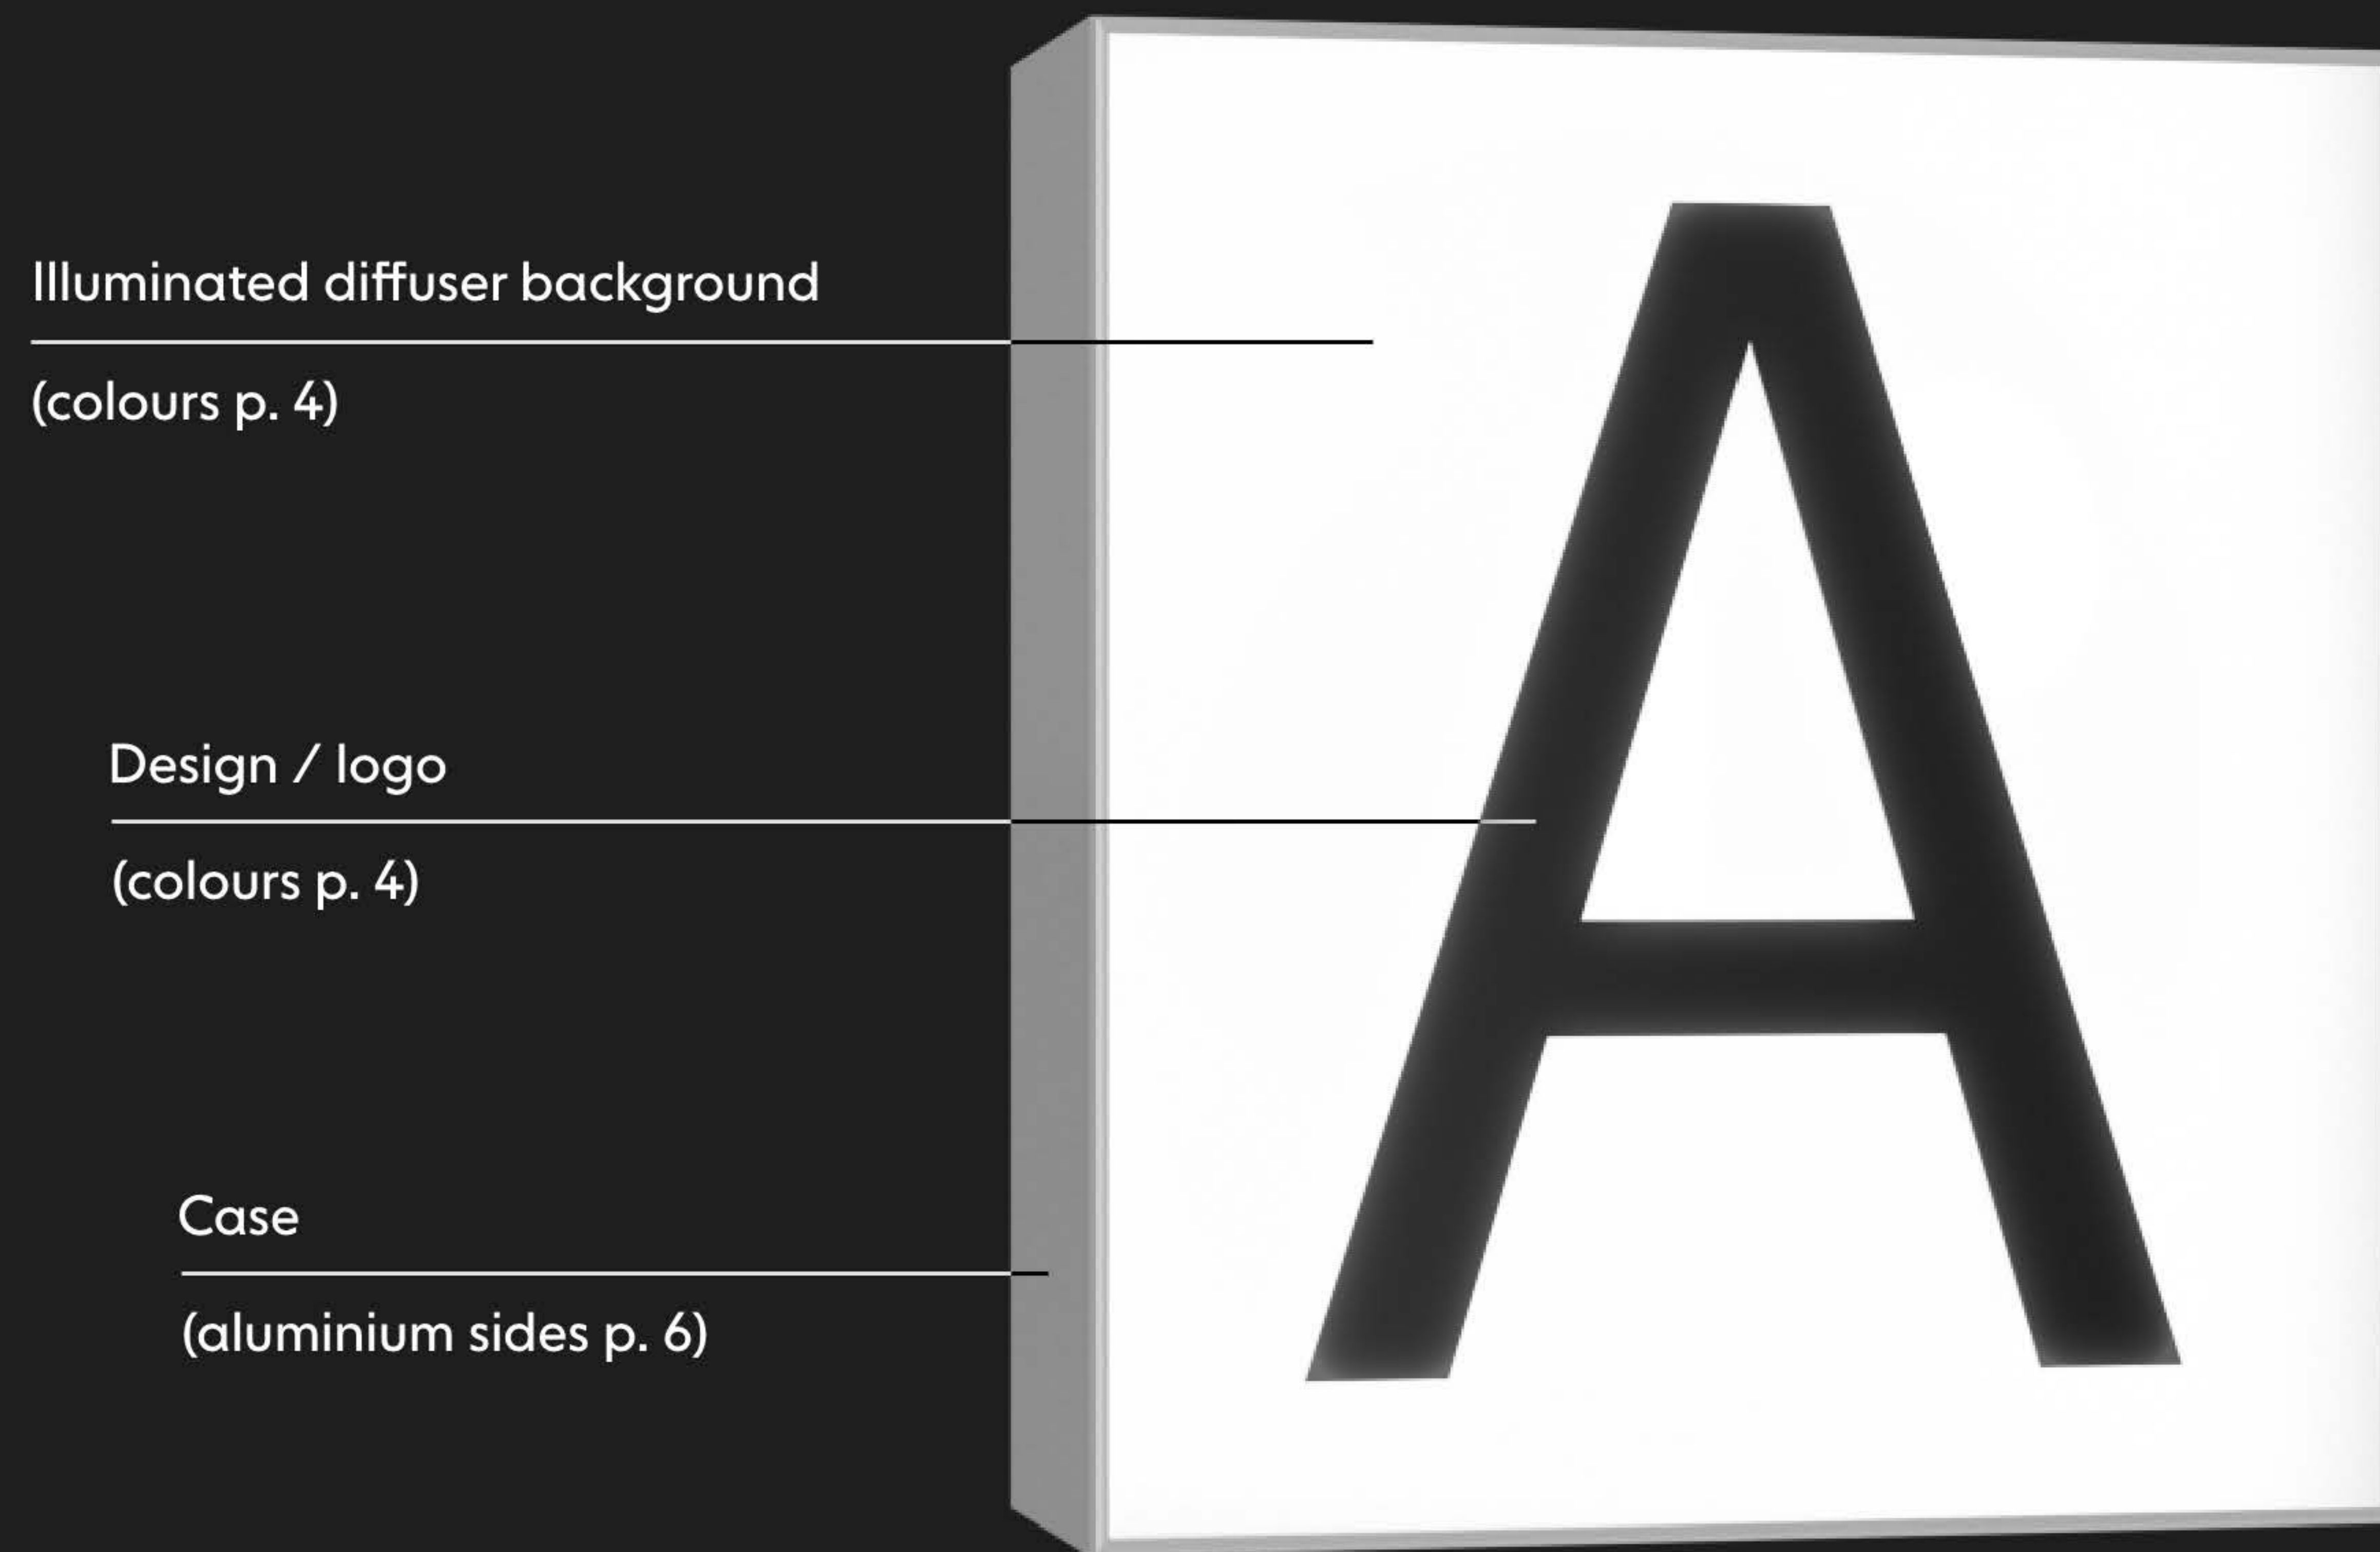

Modern Lightbox

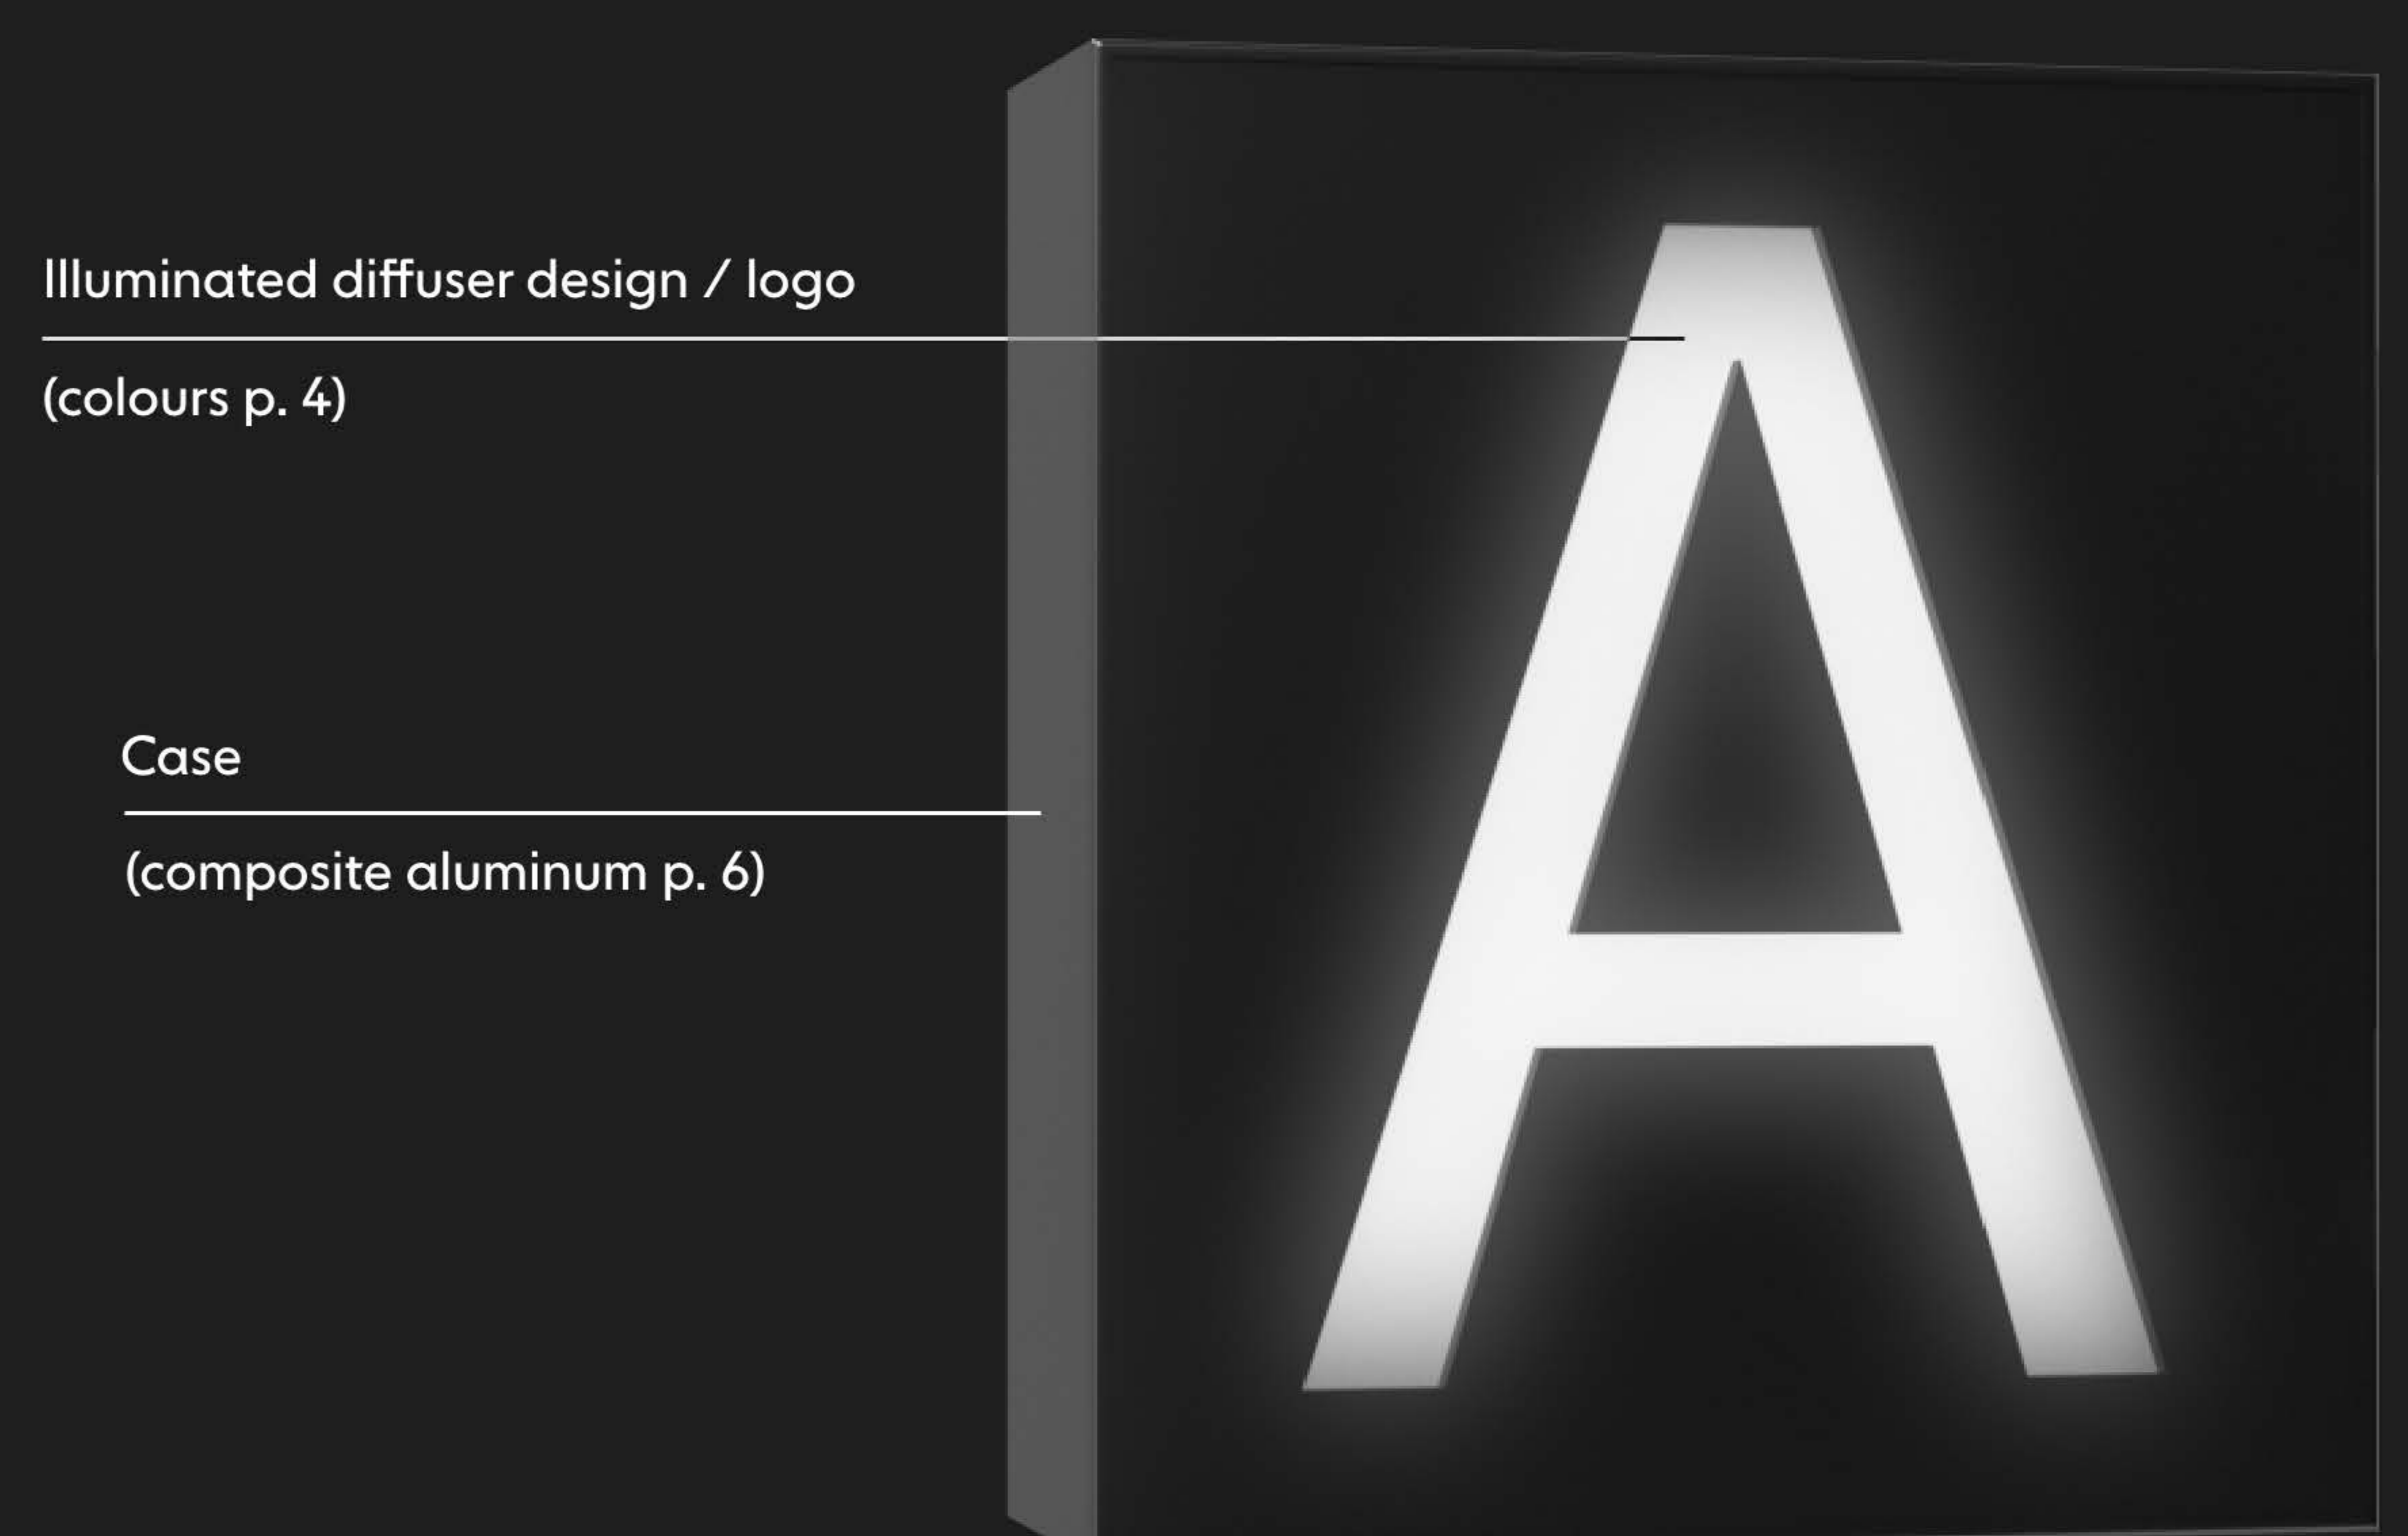

The diffuser is illuminated by the integrated LED modules.

Materials & colours (1/3)

Acrylic diffuser (Illuminated surface)

Colour codes shown for Perspex, equivalents may be used.



For additional materials & colours

see the following page →

Materials & colours (2/3)

Foils for acrylic diffuser (Illuminated surface)

These foils will be pre-installed on the acrylic.



Materials & colours (3/3)

Classic case colours

Aluminium



Traffic White
(Matt)
RAL 9016



Jet Black
(Matt)
RAL 9005



RAL
See p. 11




Aluminium
Polished

Modern case colours


Composite aluminium (Dibond)



Platinum White
(Gloss)
RAL 9003

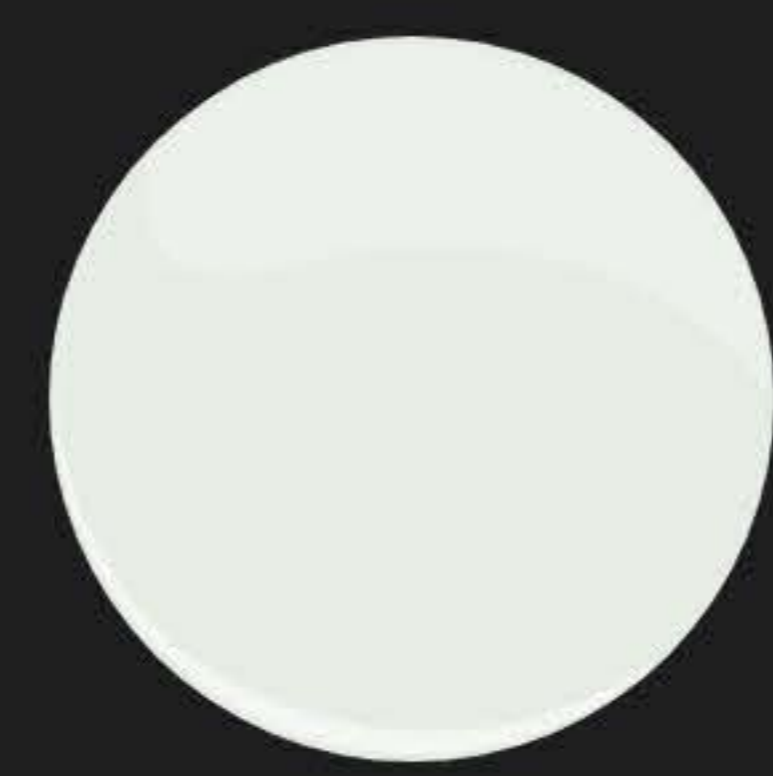


Platinum White
(Matt)
RAL 9003

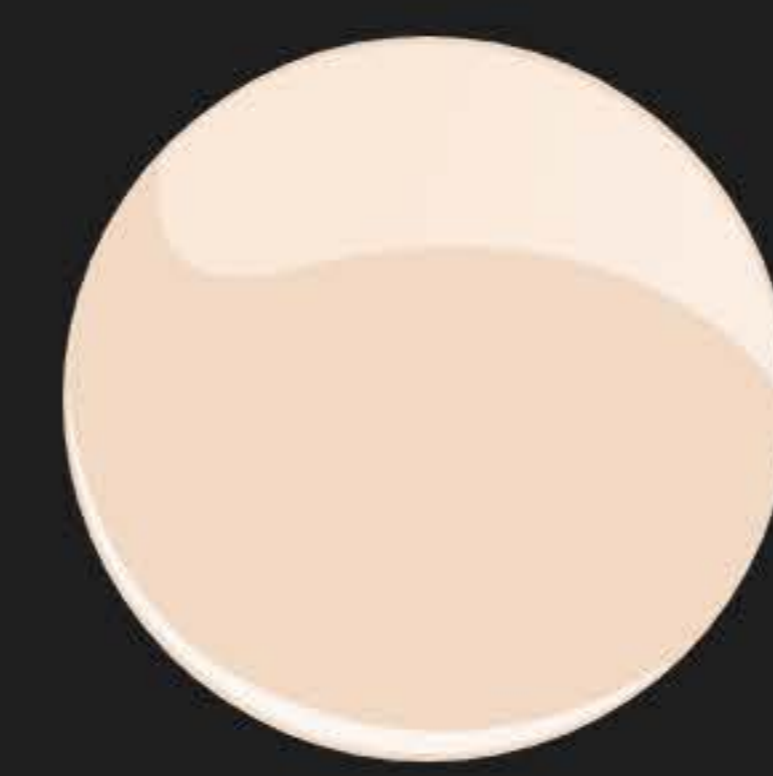


Light Ivory
(Gloss)
RAL 1015



Light Ivory
(Matt)
RAL 1015

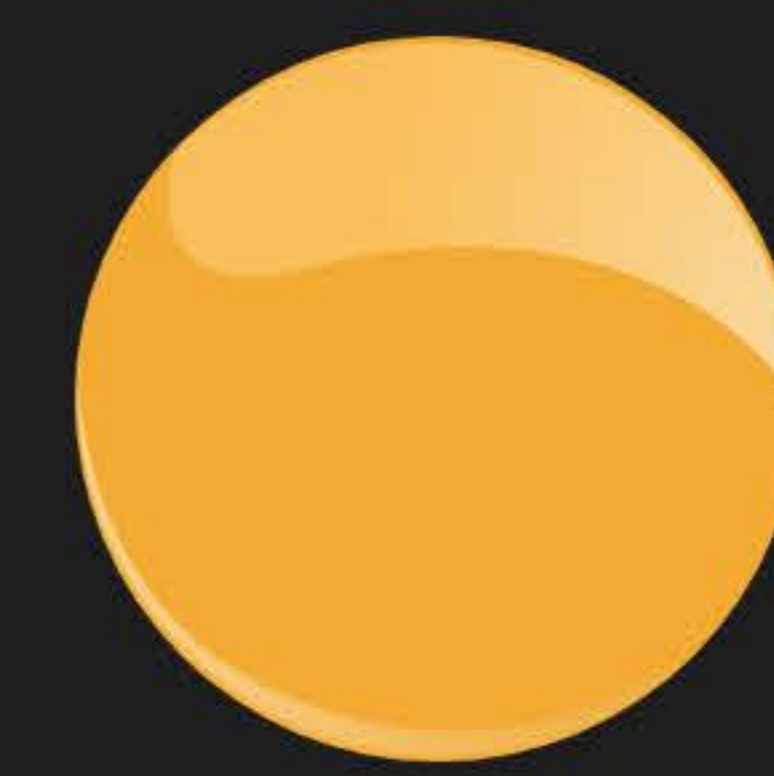

Traffic Yellow
(Gloss)
RAL 1023

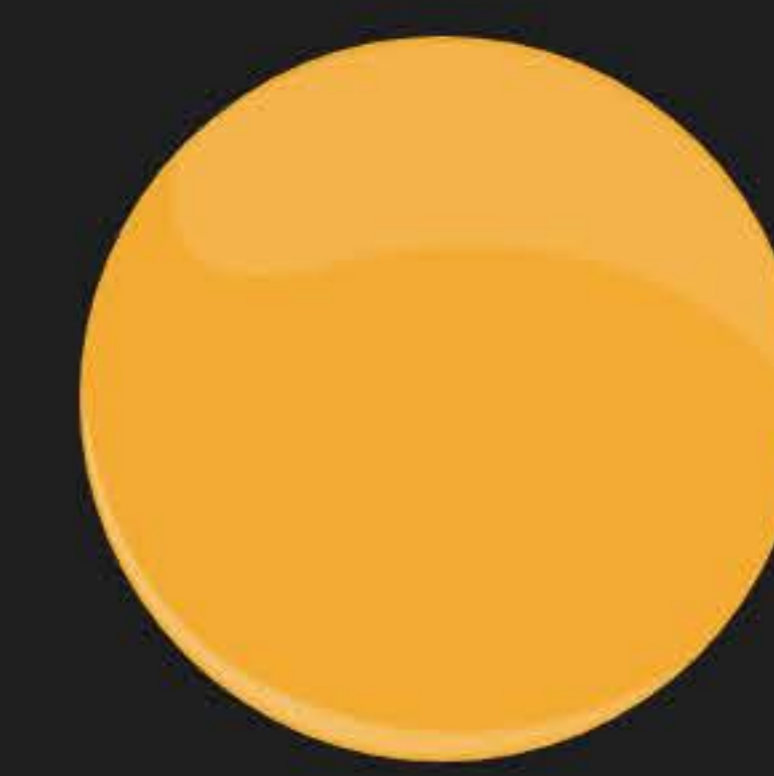

Traffic Yellow
(Matt)
RAL 1023



Traffic Red
(Gloss)
RAL 3020




Traffic Red
(Matt)
RAL 3020



Platinum White
(Gloss)
RAL 6005



Platinum White
(Matt)
RAL 6005

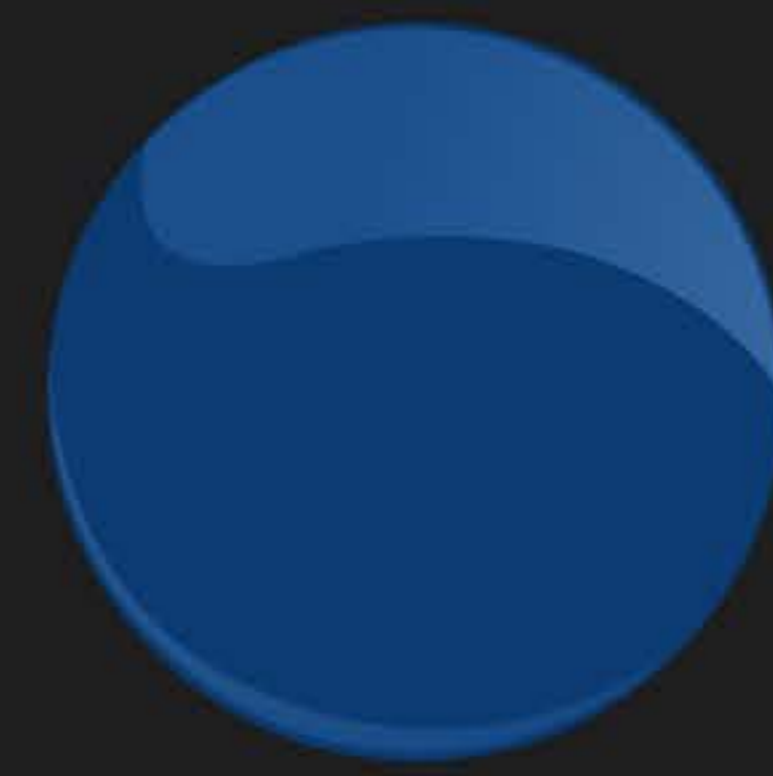

Ultramarine
Blue (Gloss)
RAL 5002



Ultramarine
Blue (Matt)
RAL 5002



Jet Black
(Gloss)
RAL 9005




Jet Black
(Matt)
RAL 9005



Metallic-
Aluminium



Butlerfinish
Aluminium

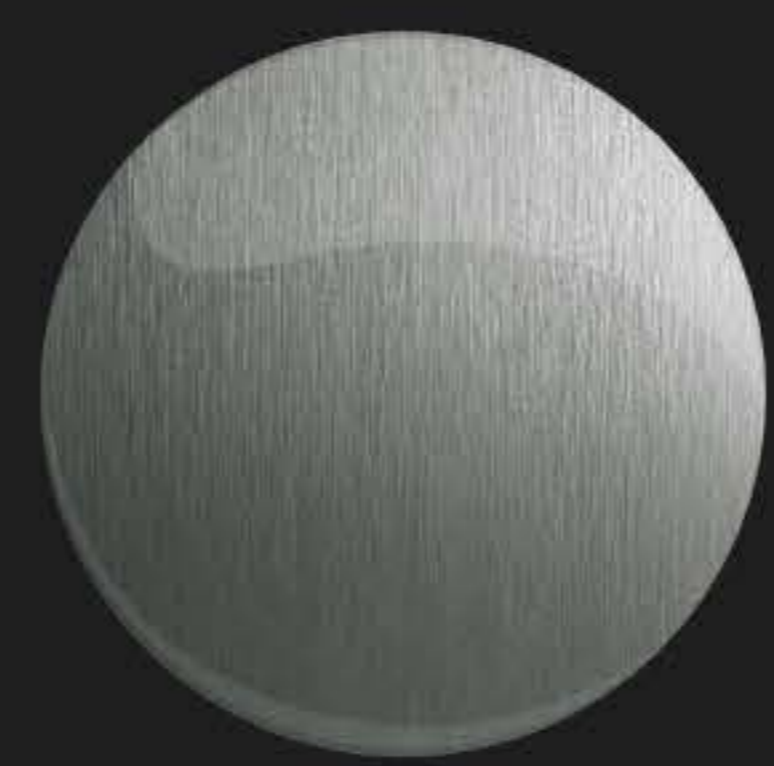

Stainless Steel



Gold



Copper


Front-facing

- Indoor / Outdoor
- Plug & play
- Wall-mounted or standing
- Logo on front face as standard (optionally double-sided)

Styles:



Classic

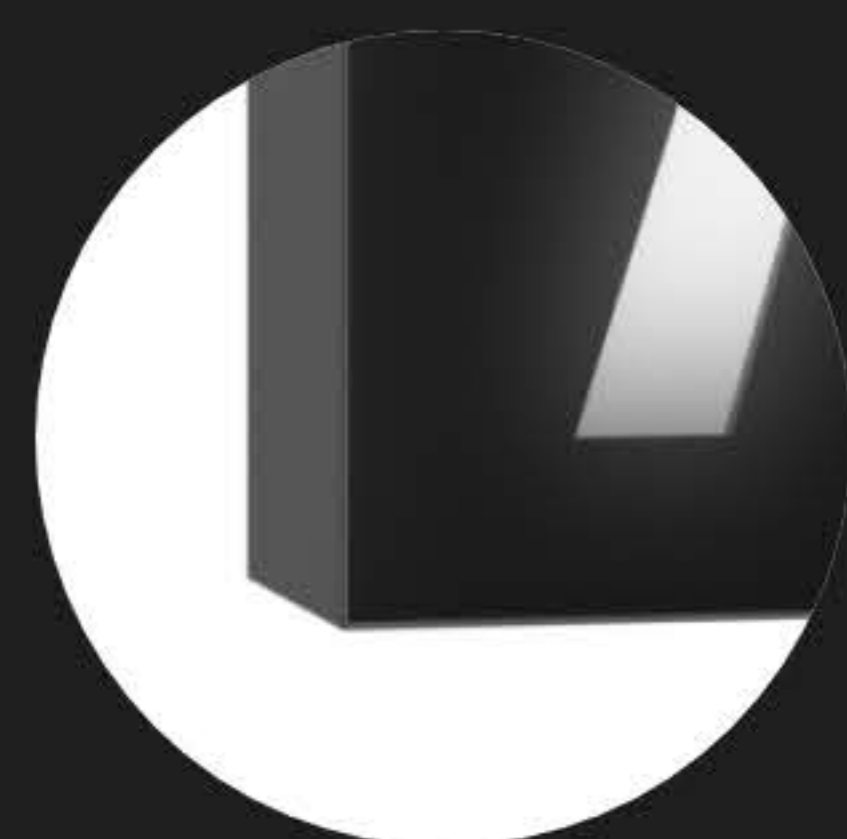

Modern

Logo

(colours p. 4)

Case

(composite aluminum p. 6)


Integrated power supply

(L3, p. 9)

Plug

(indoor)


Indoor (Plug & play connection)

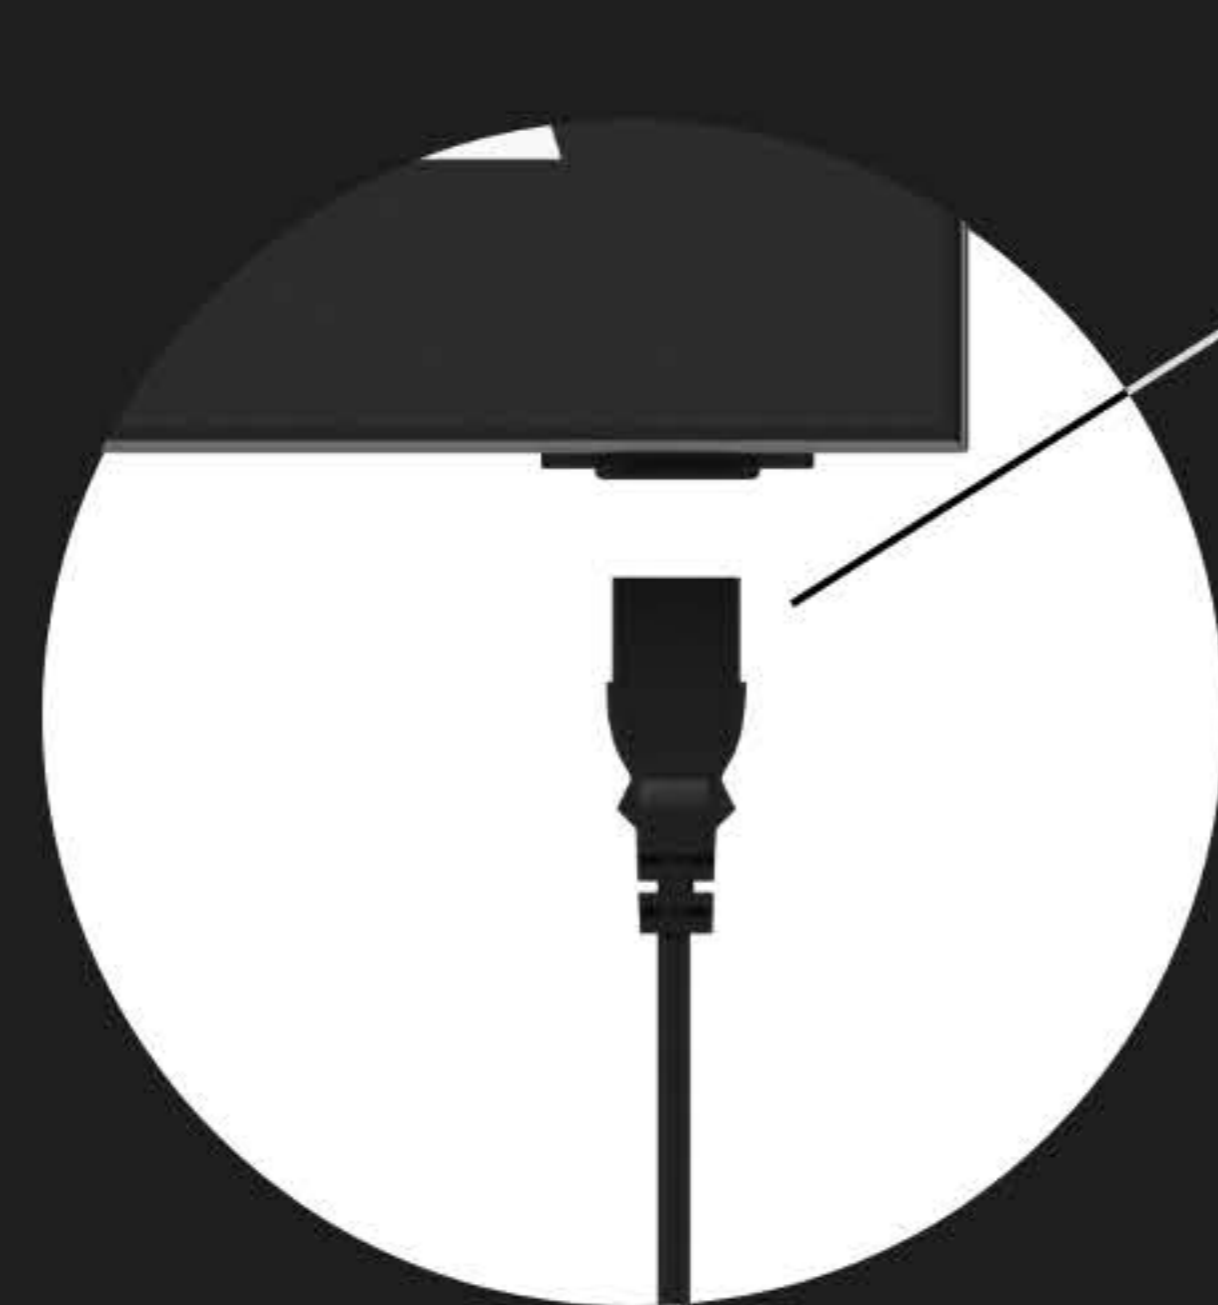

Bottom (default)




Cable

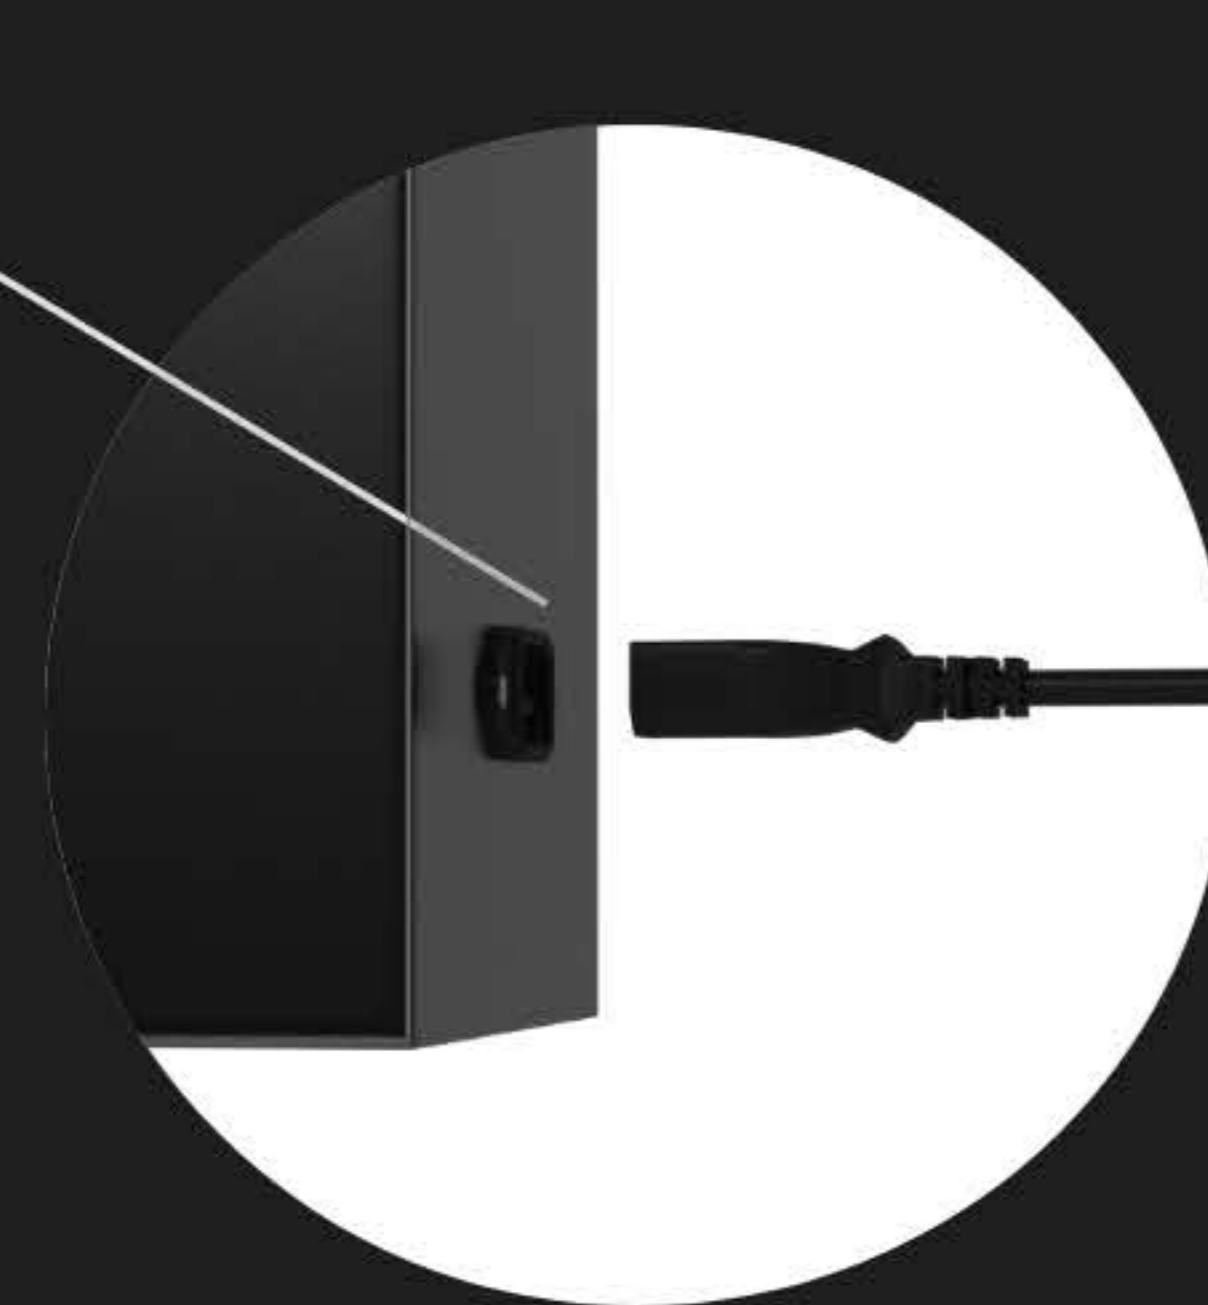


Side

Outdoor (Junction box connection)

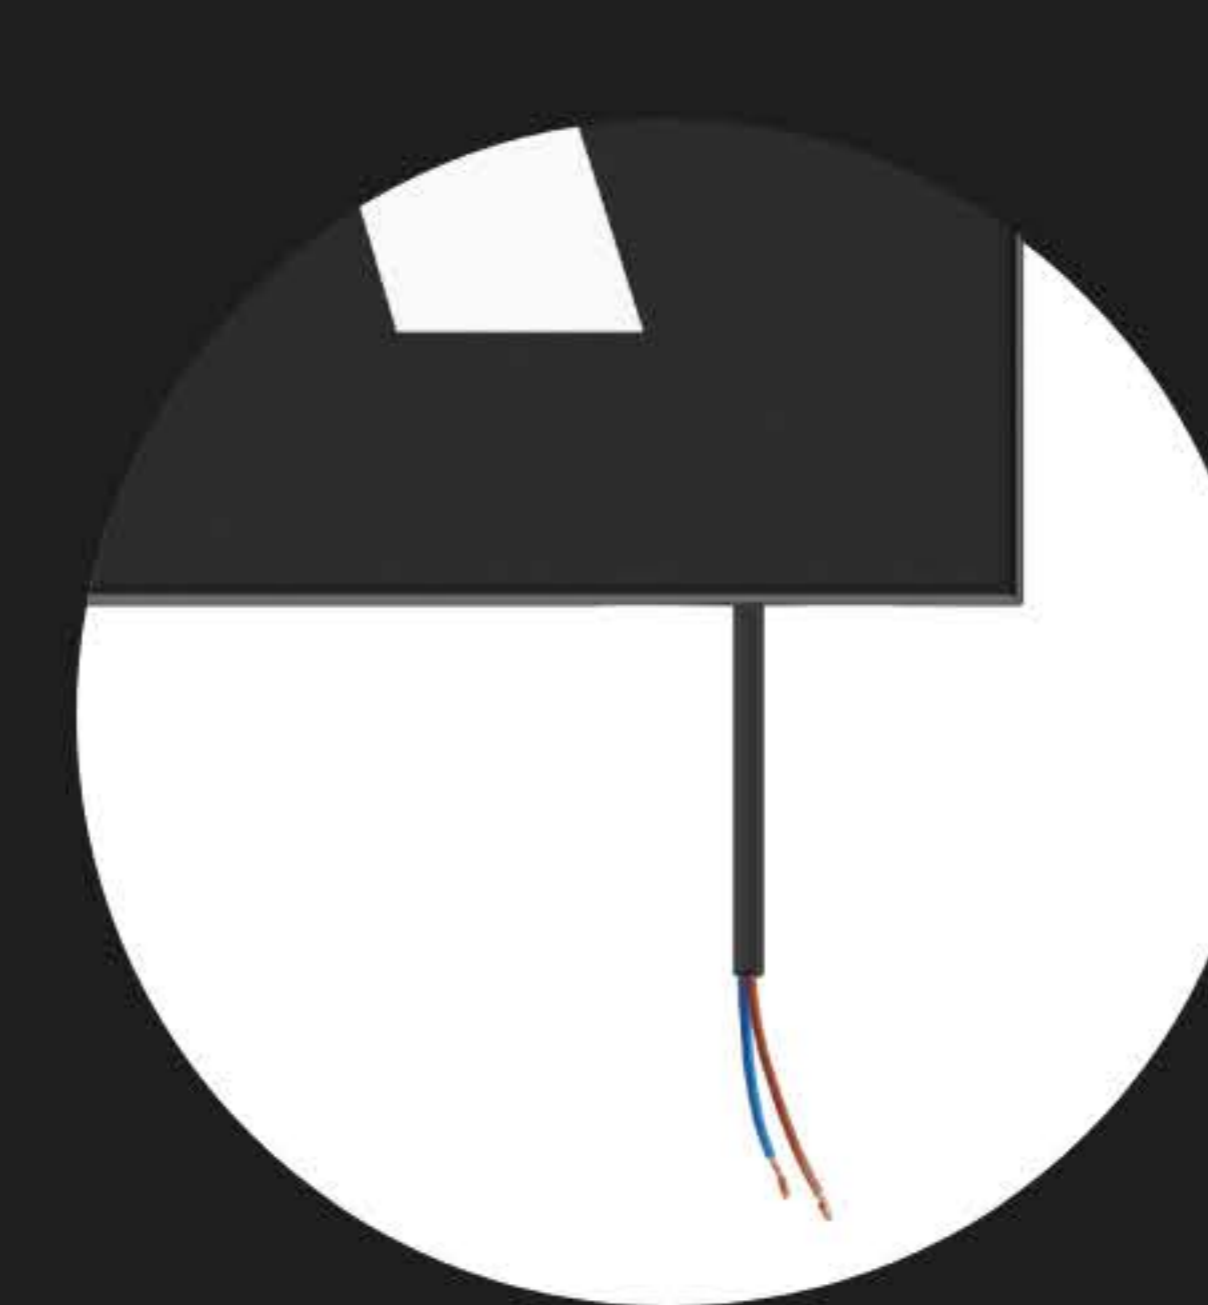

Bottom (default)

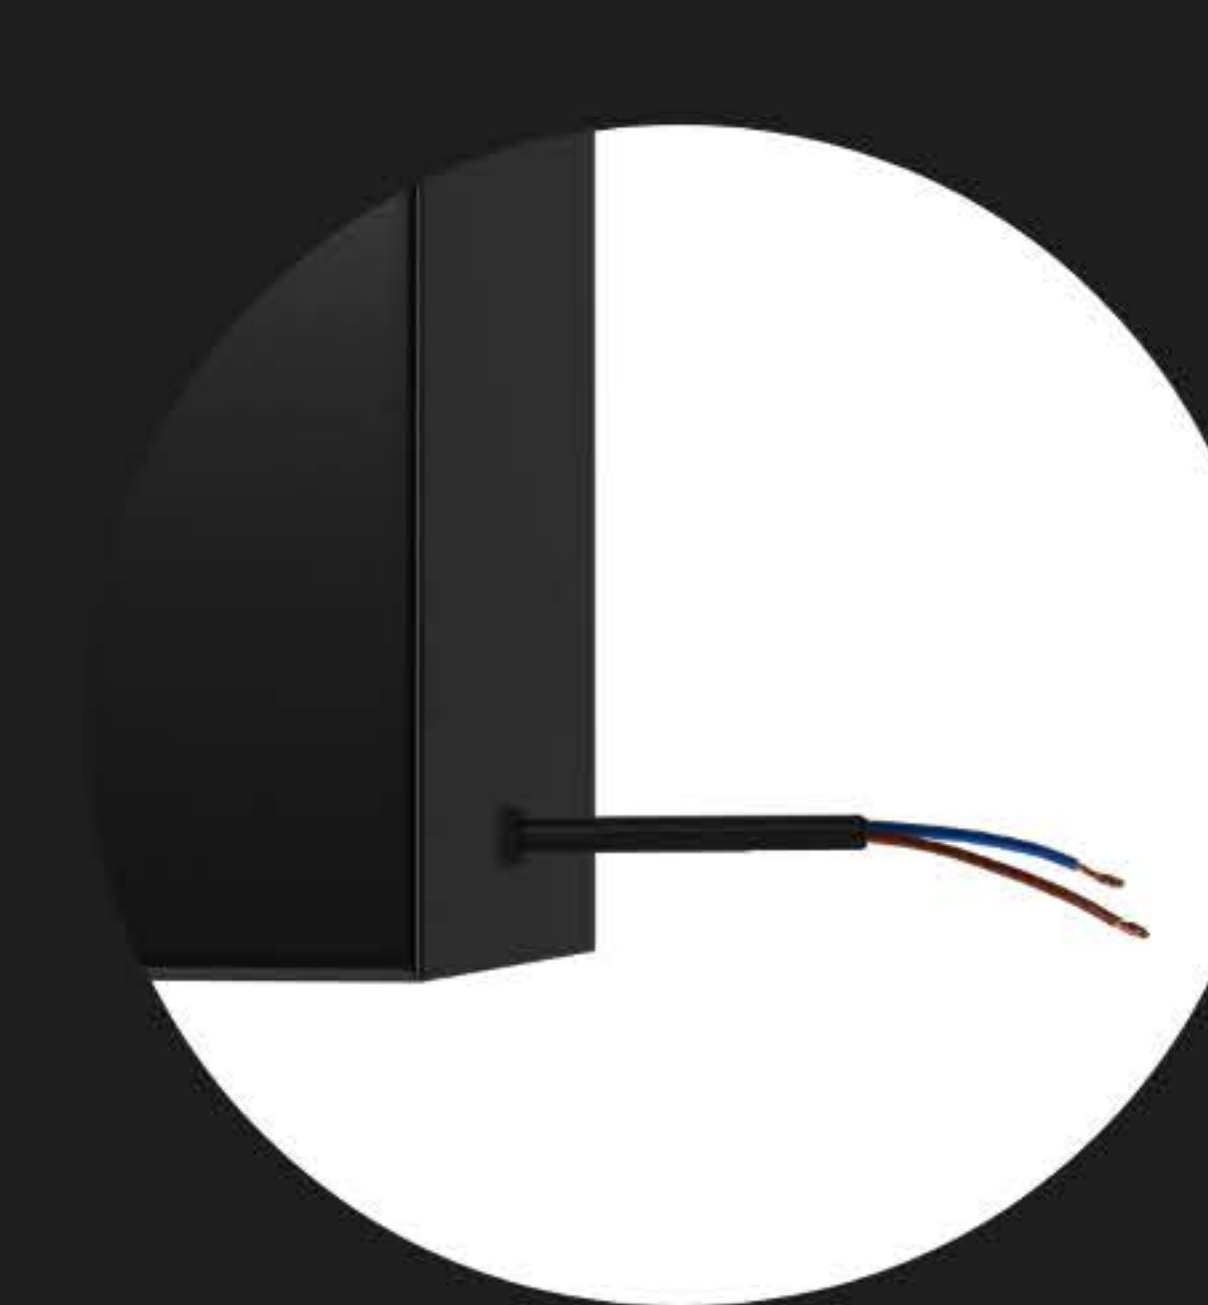

Custom

Lightbox: Projecting

- Indoor / Outdoor
- Plug & play
- Wall-mounted
- Double-sided logo

Styles:





Classic



Modern


Integrated power supply
(L3, p. 9)

Case
(composite aluminum p. 6)

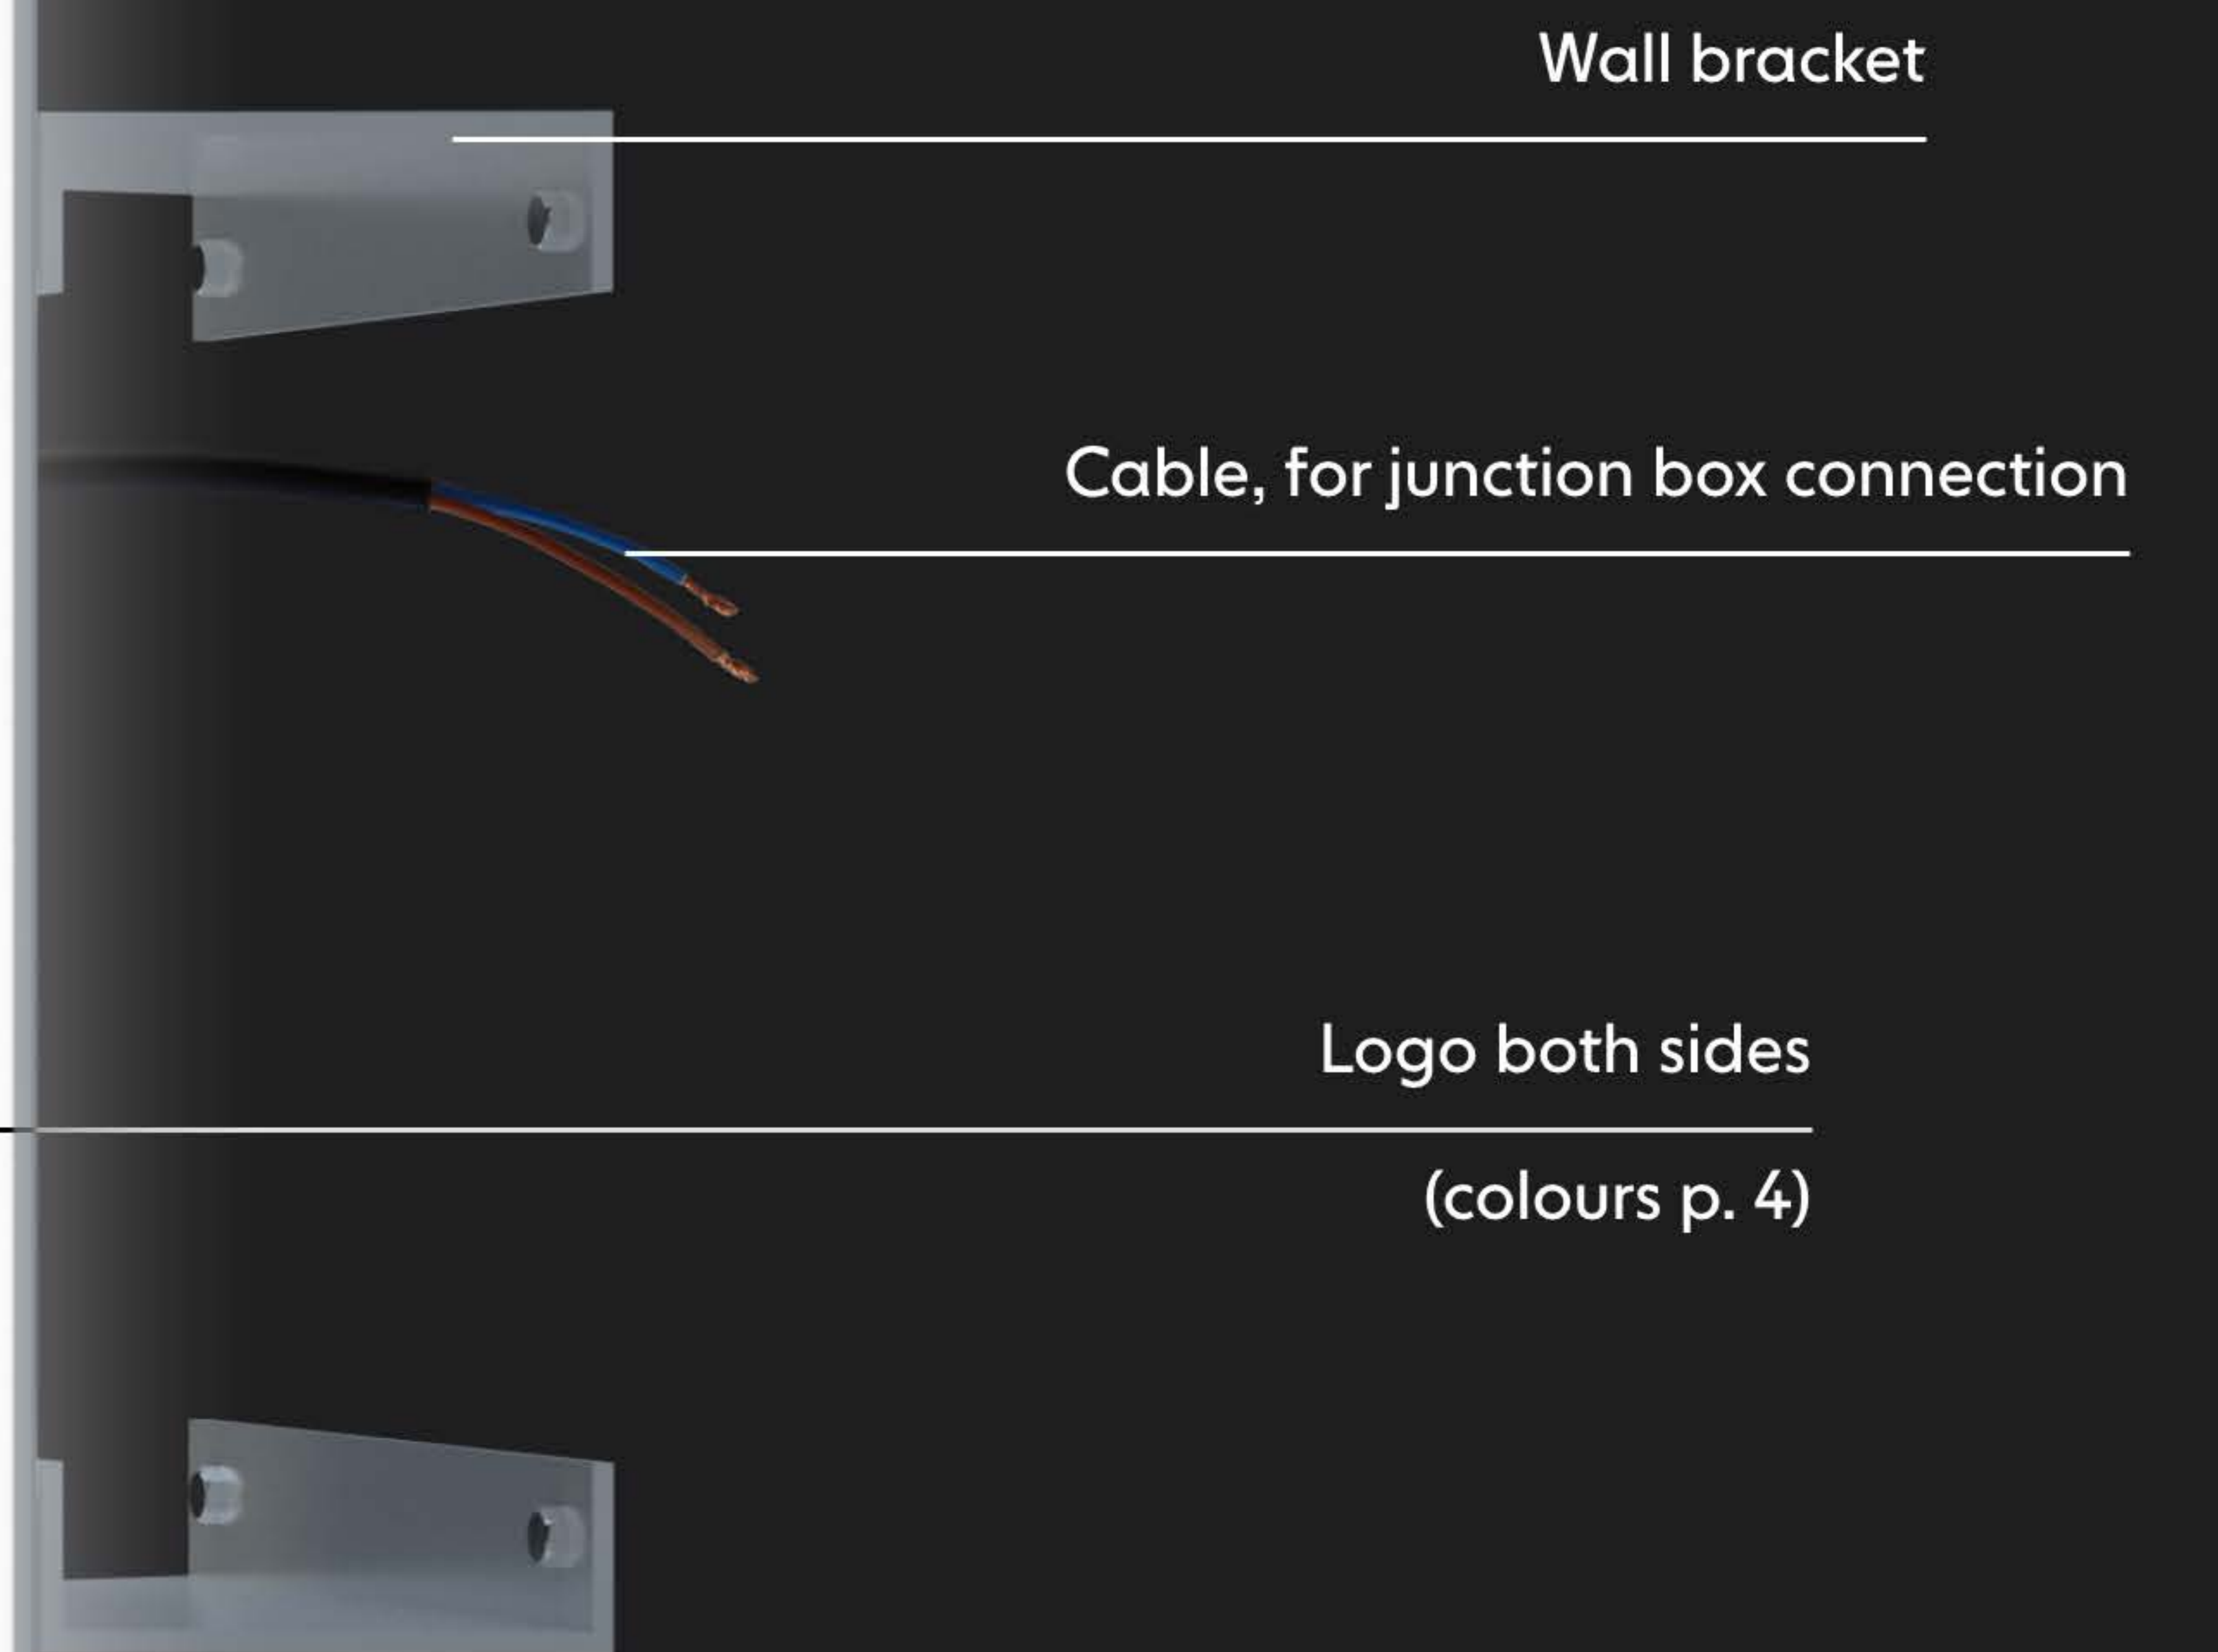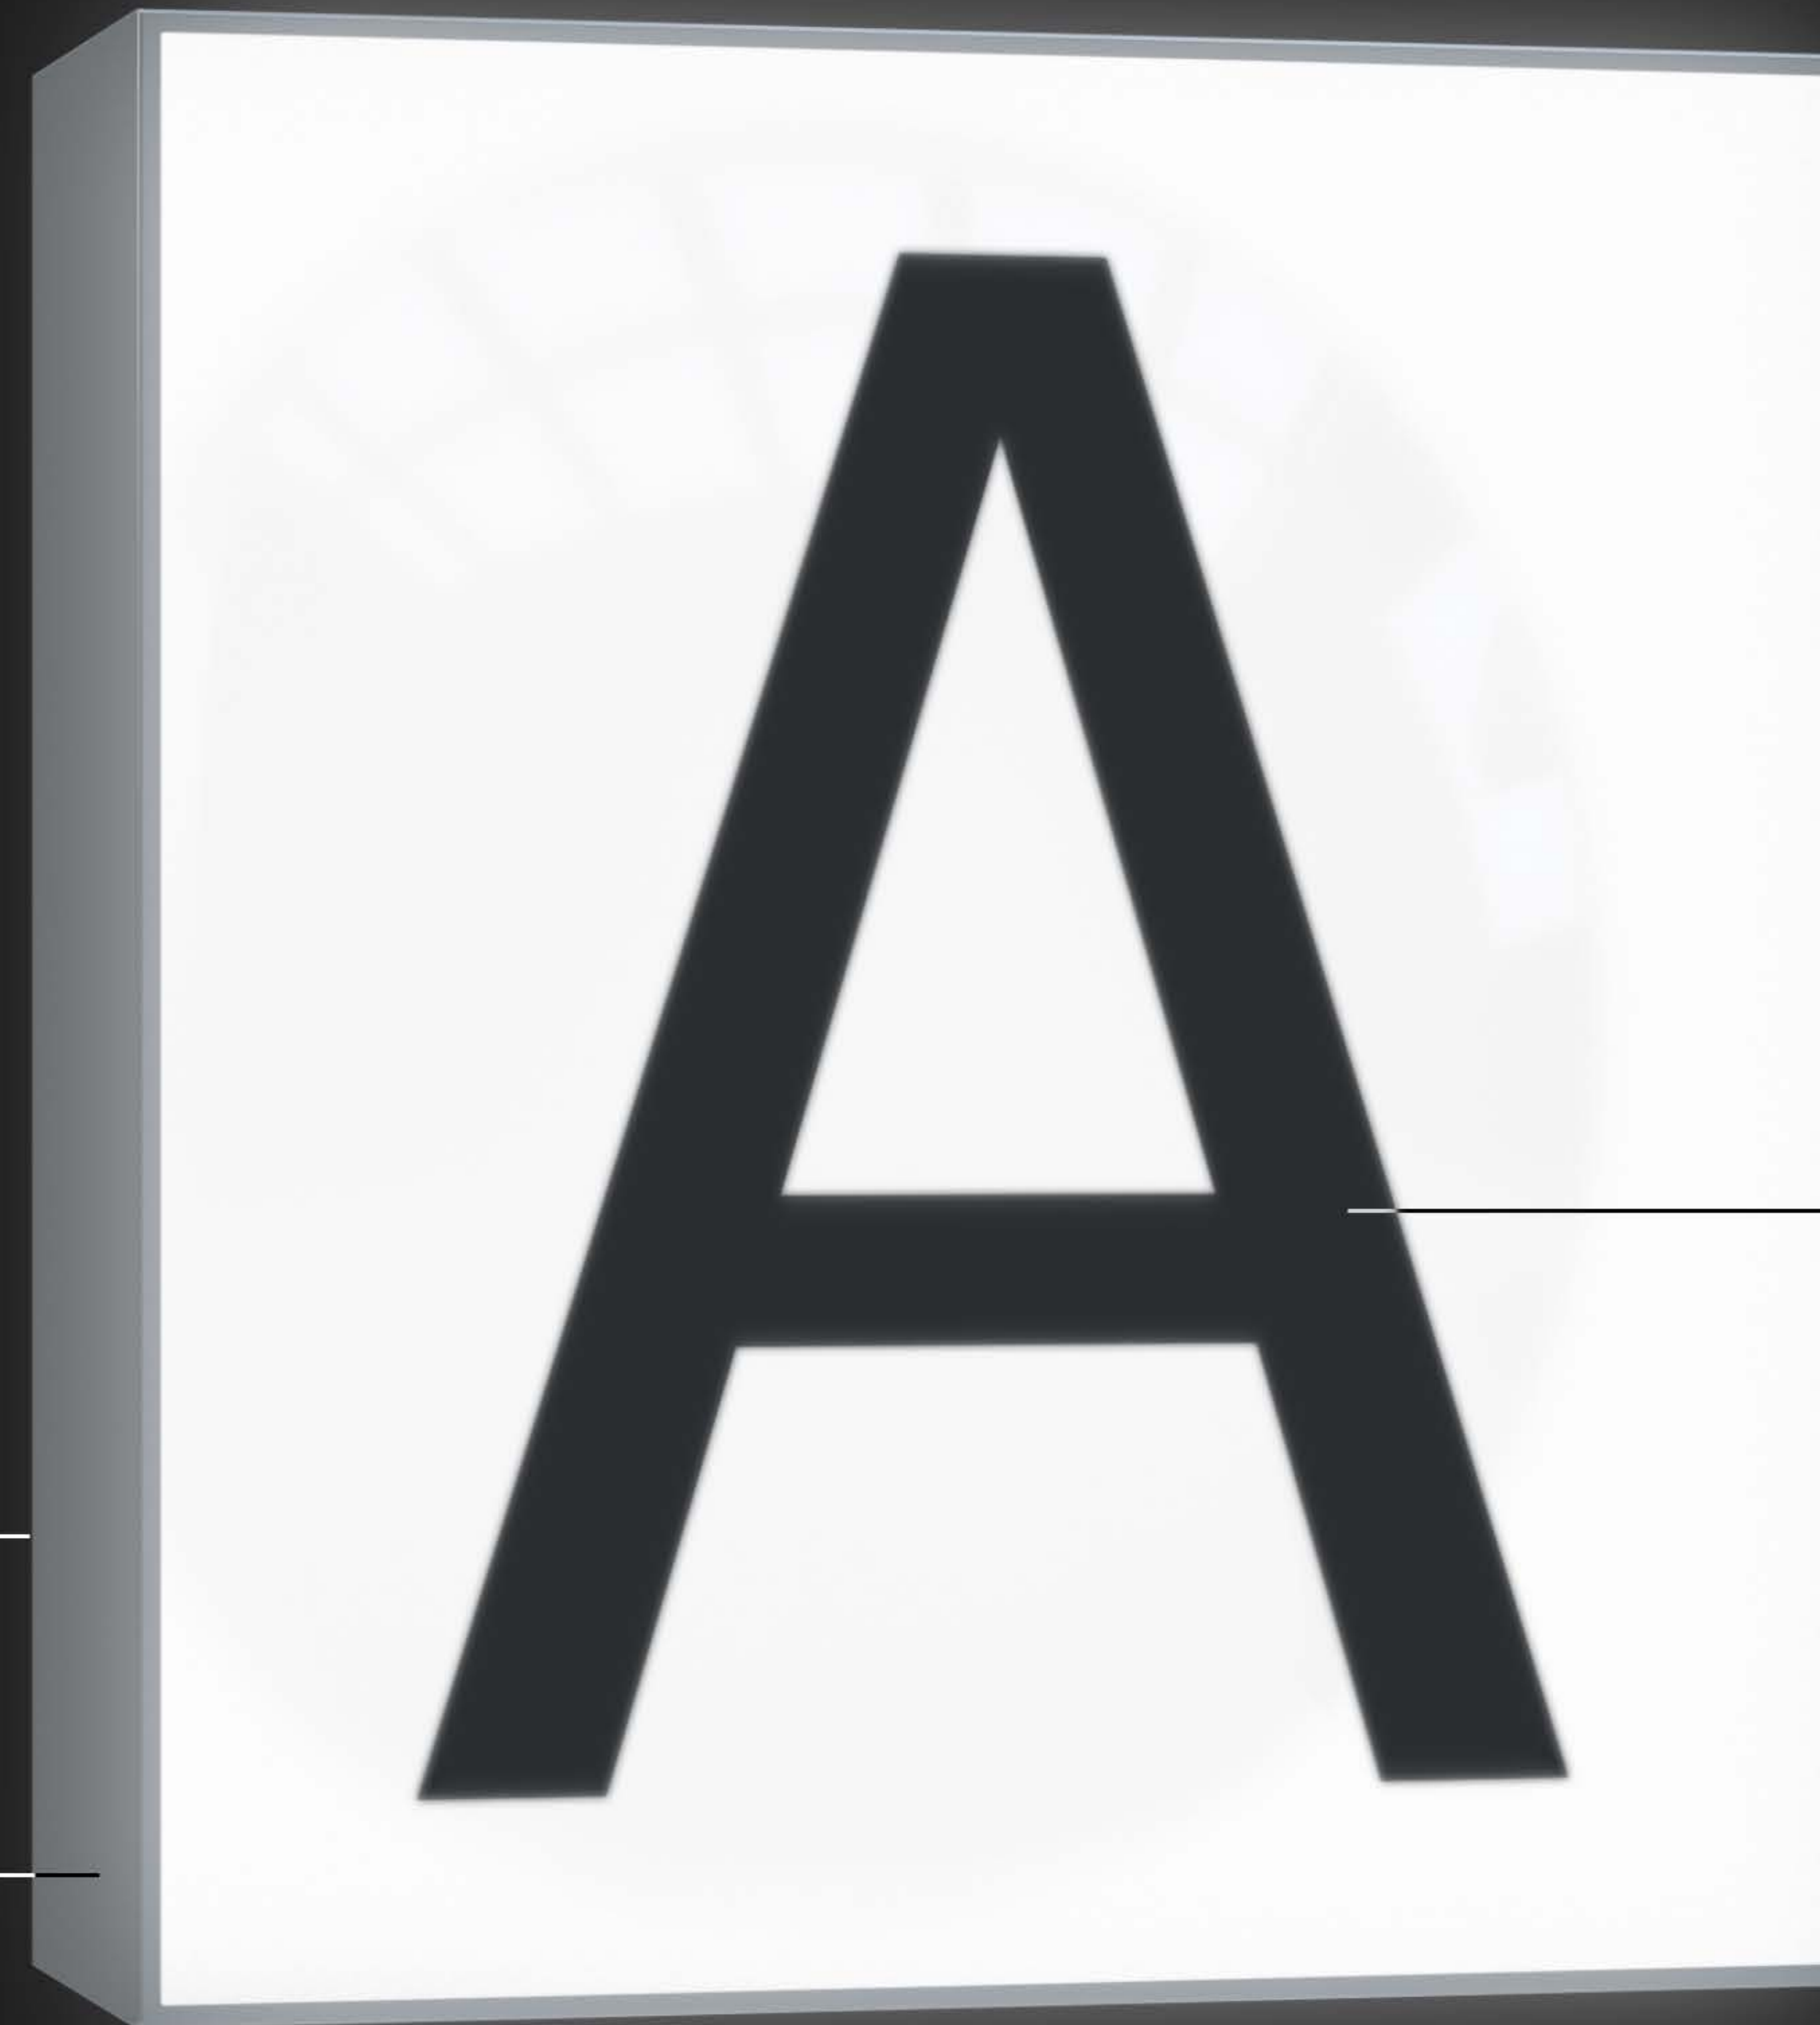

Electrical

	Switch	Dimmable	Cable Length	Output voltage
L3 LED Standard integrated	Optional: On/off switch or remote control	Non-dimmable	Total 3m	12V

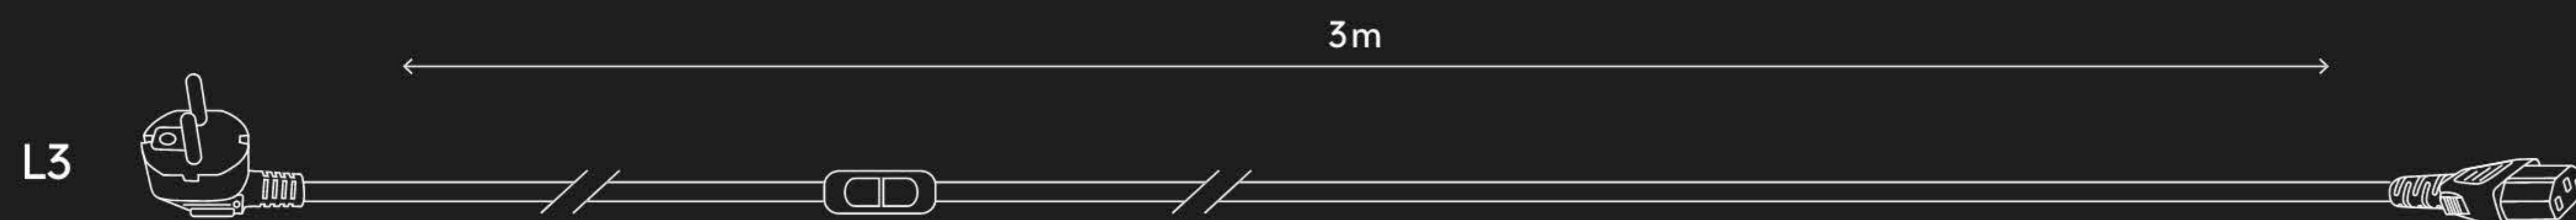

Optional extras

- Dimming
- RGB Multi-colour
- Programmable (SD / Touch screen)

NOTE:

All provided electrical equipment conforms to CE (Europe) UL (USA).



RAL Classic colours

1000	1001	1002	1003	1004	1005	1006	1007	1011	1012	1013	1014	1015	1016	1017	1018	1019
1020	1021	1023	1024	1026	1027	1028	1032	1033	1034	1035	1036	1037	2000	2001	2002	2003
2004	2005	2007	2008	2009	2010	2011	2012	2013	3000	3001	3002	3003	3004	3005	3007	3009
3011	3012	3013	3014	3015	3016	3017	3018	3020	3022	3024	3026	3027	3028	3031	3032	3033
4001	4002	4003	4004	4005	4006	4007	4008	4009	4010	4011	4012	5000	5001	5002	5003	5004
5005	5007	5008	5009	5010	5011	5012	5013	5014	5015	5017	5018	5019	5020	5021	5022	5023
5024	5025	5026	6000	6001	6002	6003	6004	6005	6006	6007	6008	6009	6010	6011	6012	6013
6014	6015	6016	6017	6018	6019	6020	6021	6022	6024	6025	6026	6027	6028	6029	6032	6033
6034	6035	6036	6037	6038	7000	7001	7002	7003	7004	7005	7006	7008	7009	7010	7011	7012
7013	7015	7016	7021	7022	7023	7024	7026	7030	7031	7032	7033	7034	7035	7036	7037	7038
7039	7040	7042	7043	7044	7045	7046	7047	7048	8000	8001	8002	8003	8004	8007	8008	8011
8012	8014	8015	8016	8017	8019	8022	8023	8024	8025	8028	8029	9001	9002	9003	9004	9005
9006	9007	9010	9011	9016	9017	9018	9022	9023								

Product compliance

Sygn's products are produced to the highest standards in both the Neon and LED industry.

Product	Standard	Conformity EU	Conformity US
Neon	EN-50107	CE / TÜV	UL
LED	IEC 60364	CE / TÜV	UL

Disclaimer: Sygn's products and production specifications are subject to change without notice. Information given here is to be used as a guide only and is no guarantee that the specific product configuration chosen is compliant in any given country or application.



sygns

Sygns GmbH
Bogen 45 / Holzmarktstr. 15-18
10179 Berlin / Germany

+49 (0) 30 2404 6130
info@sygns.com
www.sygns.com