
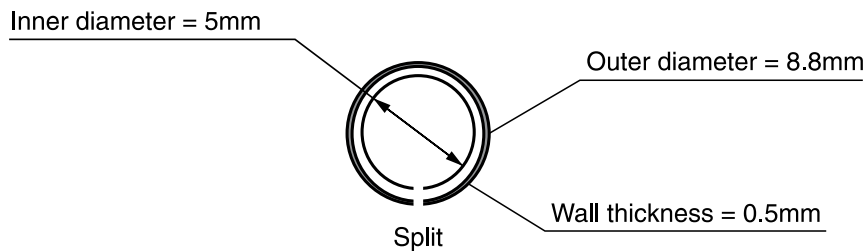


- ✓ High-Temperature, Spatter-Resistant cable and hose protection
- ✓ Suitable for casting, welding and industrial applications
- ✓ Pre-slit along length for retrofitting in field installations

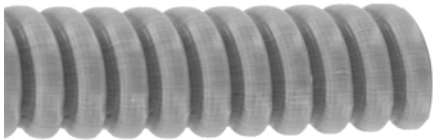

#### TECHNICAL DATA

|                           |                |
|---------------------------|----------------|
| Material                  | PTFE           |
| Ambient temperature range | -50 ... +250°C |
| Bend radius               | min. 2.5 cm    |

#### AVAILABLE TYPE

| Part number | Part reference | Length |
|-------------|----------------|--------|
| 605-010-027 | APT-0004-010   | 1,0 m  |
| 605-010-028 | APT-0004-100   | 10,0 m |

Note: additional suffix can appear to indicate a revision version or a special version.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved.

Please check our website for updates.