
single digital output

UST-M18#S-T#S Created: 12/07/2016

M18 LEDs





CONFIGURATION STATE

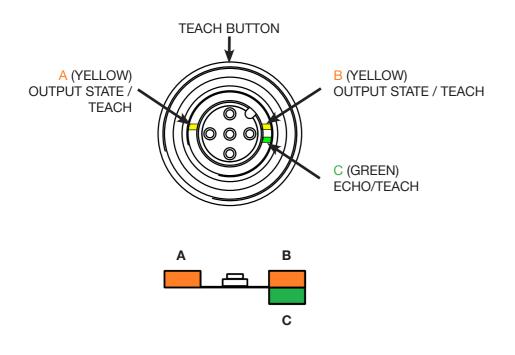


A, B ON, WHEN TARGET IS IN WINDOW. C ON, WHEN ECHO IS RECEIVED.


OUTPUT STATE






HOLD PUSH BUTTON FOR 8 SECONDS TO SWITCH FROM NO TO NC CONFIGURATION A, B, C START BLINKING UNTIL RELEASE






TEACH OPTIONS

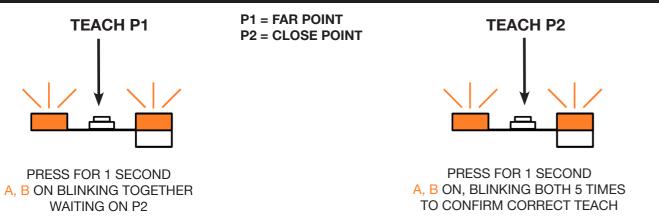

RECALL FACTORY PARAMETERS

TEACH WITHOUT TARGET



A, B, C ON, BLINKING TOGETHER 5 TIMES

