

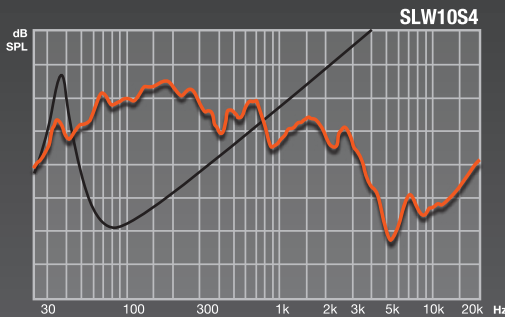


CADENCE

2 / 4 Ohm 10 in 500 Watts

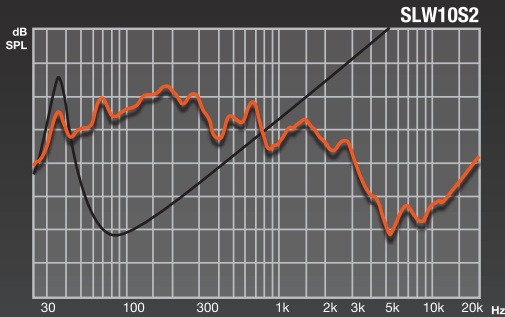

Freq Resp Phase

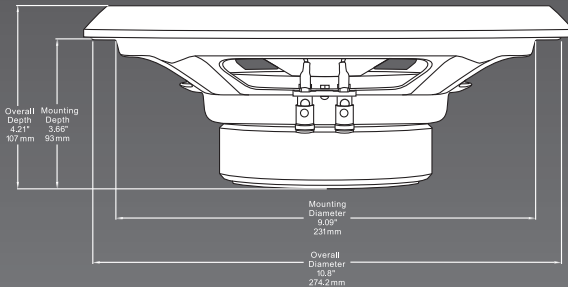

TS&PARAMETERS

SLW10S2

FO: 35.734 Hz
QMS: 6.985
QES: 0.56
QTS: 0.518
CMS: 175.985 $\mu\text{M/N}$
MMS: 112.718 gr

BL: 9.718 T/M
SPL: 88 dB
VAS: 32.236 L
RE: 1.8 Ohm
SD: 352.9 cm^2
XMAX: 8

SLW10S4

FO: 36.83 Hz
QMS: 6.758
QES: 0.713
QTS: 0.645
CMS: 164.74 $\mu\text{M/N}$
MMS: 100.673 gr

BL: 11.208 T/M
SPL: 88 dB
VAS: 30.318 L
RE: 3.6 Ohm
SD: 352.9 cm^2
XMAX: 8

SPECIFICATIONS


Application: Subwoofer

Basket Type: Rolled Steel
Cone: Ultra-Stiff Paper Composite
Dust Cap: 3D Molded Dust Cap
Surround Style: Laminated Butyl Rubber
Structure Weight: 2.813 lbs
2" Single 2 or 4 ohm ASV Voice Coil

Impedance: 2 or 4 ohm
RMS / Peak Watts: 250 / 500
Frequency Response: 36 Hz - 500 Hz
SPL @ 1w/1m: 86dB

ENCLOSURE STYLE:

VENTED (1.75cu ft)	SIZE H x W x D
Enclosure Dim.	15.5" x 20" x 6.5" (393.7 x 508 x 165.1)
Slot Port	12" x 3" x 4" (304.8 x 76.2 x 101.6)
Circular Port	4" x 9.5" (101.6 x 241.3)
System Gain	+5 dB/73 Hz
F-3	45 Hz
Tuning Frequency	50 Hz
SEALED ($.65-1.25\text{cu ft}$)	
Enclosure Dim.	11.9" x 18" x 7.75" (302.3 x 457.2 x 196.9)



Cadence Acoustics Ltd.

859 Lawson St. City of Industry, CA 91748
800.477.2328 • 626.465.3383 • Fax: 626-470-6111 • www.cadencesound.com

