


CADENCE

Xenith XS 655



6.5 in

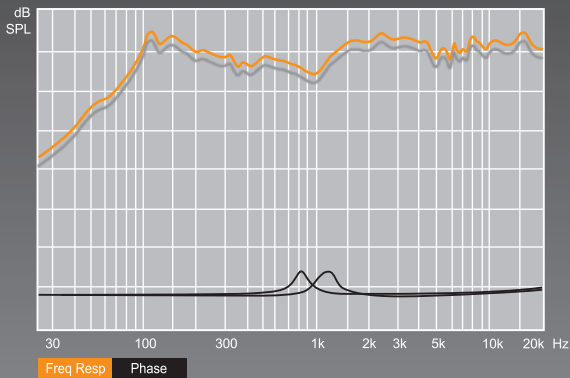

TS PARAMETERS

FMS: 85 Hz BL: 8.2 N/A
QMS: 1.76 SPL: 90 dB
QES: 1.30 VAS: 1.0 l
QTS: 0.70 RE: 3.6 Ohm
RES: 18.7 Ohm RP: 2.6 Ohm
RMS: 14.7 kg/s LP: 5.4 mH
CMS: 0.05 mm/N CP: 500.9 μ F
MMS: 36.3 gr LE: 0.1 mH
NREF: 0.10 %


4 Ohm 180 Watts PEAK Power

SPECIFICATIONS

Application: 2 - Way Speaker

Basket Type: Open Steel Basket
Cone: Black Plated Acrylic w/ Piano Finish
Tweeter: Extended Frequency Dome Tweeter
Surround Style: Butyl Rubber
Structure Weight: 40 oz.

Impedance: 4 Ohm
RMS / Peak Watts: 60 / 180
Frequency Response: 60Hz - 20KHz
SPL @ 1w/1m: 91dB

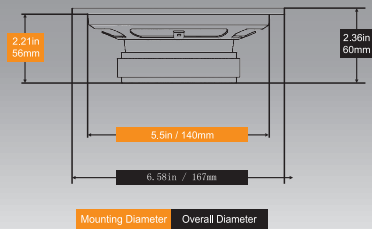

Cadence Acoustics Ltd.

859 Lawson St., City of Industry, CA 91746
800.477.2328 • 626.485.3385 • Fax: 626-470-6111 • www.cadencesound.com

