


CADENCE

Xenith XS 693



6 x 9 in

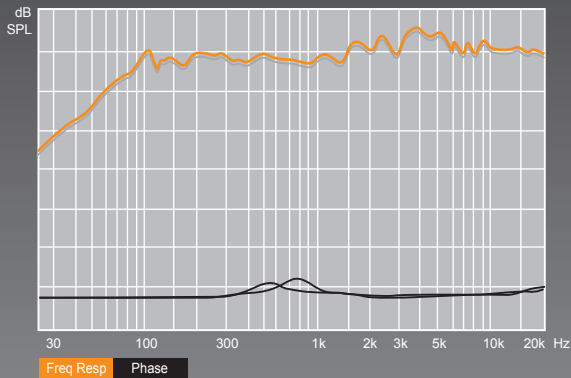

TS PARAMETERS

FMS: 73.7 Hz BL: 5.5 N/A
QMS: 1.64 SPL: 92 dB
QES: 0.99 VAS: 35.4 l
QTS: 0.62 RE: 3.6 Ohm
RES: 8.5 Ohm RP: 5.1 Ohm
RMS: 5.1 kg/s LP: 9.2 mH
CMS: 0.26 mm/N CP: 896.6 μ F
MMS: 18.2 gr LE: 0.3 mH
NREF: 1.38 %


4 Ohm 200 Watts PEAK Power

SPECIFICATIONS

Application: 3 - Way Speaker

Basket Type: Open Steel Basket
Cone: Black Plated Acrylic w/ Piano Finish
Tweeter: Extended Frequency Dome Tweeter
Surround Style: Butyl Rubber
Structure Weight: 70 oz.

Impedance: 4 Ohm
RMS / Peak Watts: 60 / 200
Frequency Response: 55Hz - 20KHz
SPL @ 1w/1m: 92dB

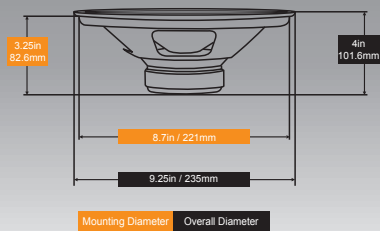

Cadence Acoustics Ltd.

859 Lawson St, City of Industry, CA 91748
800.477.2328 • 626.465.3383 • Fax: 626-470-6111 • www.cadencesound.com

