
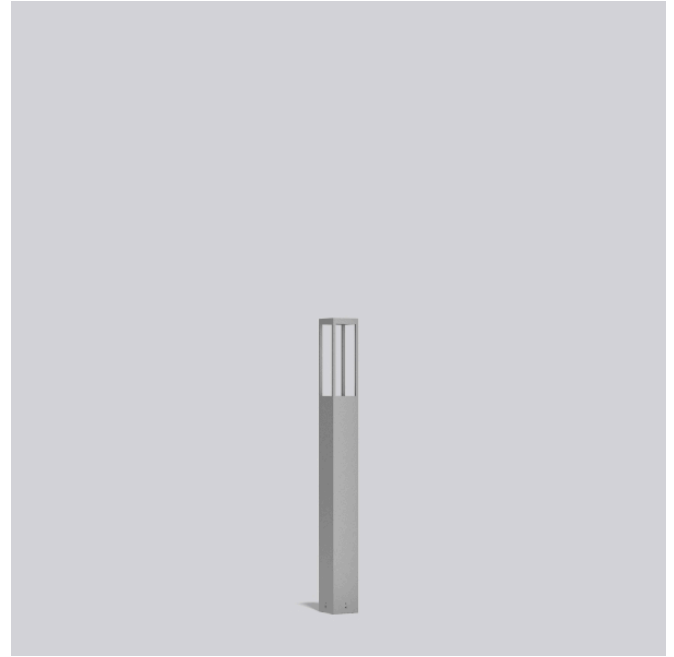


Bollards  
4051859971672  
LED  
L 156, B 156, H 1560



#### Colour

Colour silver metallic

#### Dimensions

Length L 156 mm  
Width B 156 mm  
Height H 1.560 mm  
Weight 0 kg

#### Lamp

Lamp LED  
Colour temperature 3000K  
Colour rendering index (CRI) 83  
Colour tolerance 3  
Rated life 50000 h (L80/B10)  
Photobiological safety according to EN 62471 Risk group 1

#### Lighting technology

Beam angle Up 0°

#### Electrical

Control gear AC Strom, dim.Ph.an-/abschnitt  
Voltage 220 - 240 V / 50 Hz  
Luminaires on B10A fuse 40  
Luminaires on B16A fuse 60  
Luminaires on C10A fuse 65  
Luminaires on C16A fuse 102  
Inrush current / Inrush current duration 0.09 A / 60000 µs

#### Approbations

Type of protection	IP 66
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK06 (1 Joule)
Safety marks	F-mark
Ambient temperature min.	-20 °C
Ambient temperature max.	40 °C
Conformity mark	CE, EAC
Non-maintained power mode	Umgebungstemperatur / temperature ambiante => -20 °C ... + 40 °C