



InterTest, Inc.
 303 State Route 94
 Columbia, NJ 07832
 +1 908 496 8008
<https://intertest.com>

PTZ-XD SERIES CAMERA SYSTEMS



Micro PTZ

29mm dia. x 83mm long
 720p HD camera
 LED illumination
 Stainless steel housing
 Splashproof
 270° pan & 95° tilt range
 *Digital zoom 4x
 Toolless focus



PTZ-35

35mm dia. x 165mm long
 1080p HD camera
 LED illumination
 Stainless steel housing
 Waterproof
 360° pan & 180° tilt range
 *Digital zoom 4x
 Easy clean decon. surfaces



PTZ-45

45mm dia. x 130mm long
 1080p HD camera
 LED illumination
 Nickel plated
 Aluminum housing
 Waterproof
 360° pan & 270° tilt
 *Digital zoom 4x



PTZ-XDMCU DVR Controller

- Built-in viewing device
- Joystick for pan, tilt, and light control
- Locking power and camera connectors
- HDMI and CVBS output
- Video recording
- Image capture
- On-board storage (micro-SD)
- Works with all PTZ-XD series camera heads
- More...




© 2023 Peerless Creations LLC.

This document provides technical information for the user. Peerless Creations LLC. reserves the right to modify the information in this document as necessary without notification. Peerless Creations LLC. holds no responsibility for any errors that may appear in this document.

PEERLESS[®]
CREATIONS LLC

PTZ-XD SERIES CAMERA SYSTEM SPECIFICATIONS

Controller Model:	PTZ-XDMCU
Compression Format	H.264/H.265
Illumination Control	Yes
Video Format	MP4 (H265+AAC)
Frame Rate	60fps
Data Storage	Micro SD 128GB Max
Photo Format	JPG/JPEG
Image Resolution	Up to 8MP
Image Capture	Yes
HDMI Video Resolution	1920 X 1080
CVBS Video Resolution	720 X 576
Operating Temperature	-30°C~70°C
Power Supply	DC IN 12V < 1.5 A
System Language	Chinese/English/German/Spanish/Polish/French

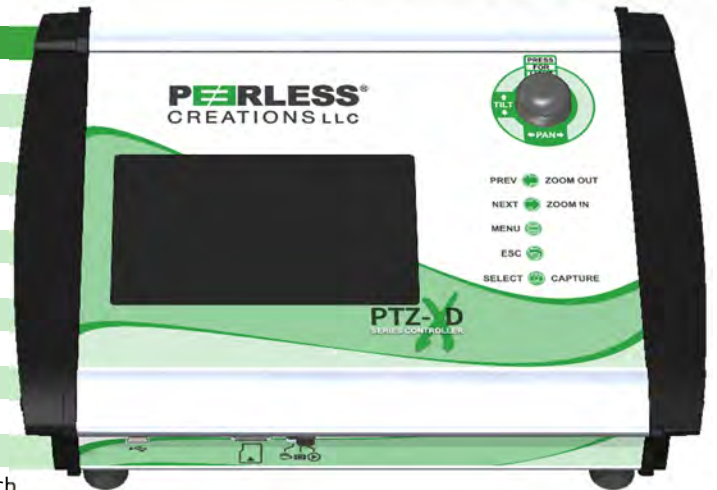

Camera Model:	Micro PTZ	PTZ-35	PTZ-45
Image Sensor	1/4.4 Color CMOS	1/2.8 Color HD CMOS	
Effective Image Area	3.6mm X 2.03mm	12mm X 9.3mm	
Effective Pixel Array	1284H X 724V	1945H X 1097V	
Pixel Size	2.8µm X 2.8µm	2.8µm X 2.8µm	
Signal/Noise Ratio	>43.1dB	>30dB	
Back Light Compensation		Auto	
White Balance		Auto	
Min Illumination	.001Lux	.0001Lux/1.2F	
Wide Dynamic Range		Auto WDR	
LED Illumination		Yes	
Operating Temperature	-40°C~85°C	-30°C~85°C	
Cable Length	Up to 30 meters [100']	Up to 60 meters [200']	
Resolution	720p	1080p	

