


Weld-i® 1000 Quoting Worksheet

1. NTSC or PAL
2. Target size: _____
Tip-to-Target Distance: _____
3. Camera/lens:
11mm – 1" to 5" tip-to-target
18mm – 4" to 12" tip-to-target
30mm – 10" to 20" tip-to-target
4. Range of focus (HFOV):
Desired - minimum: _____ maximum: _____
Actual - minimum: _____ maximum: _____

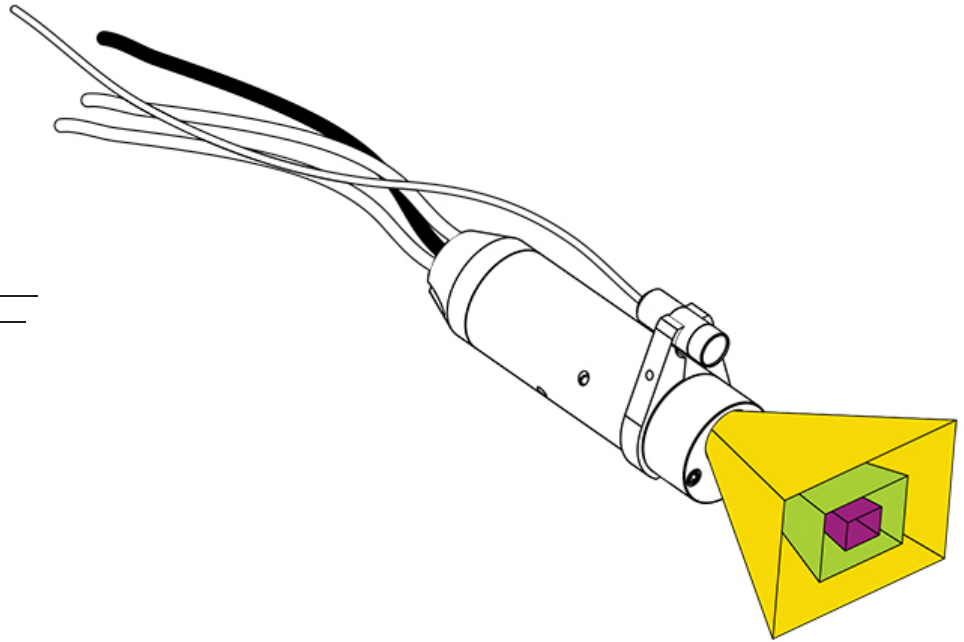

5. Controller:
Desktop
Rack mount
Dual Rack mount

6. Cable length (meters):
2
3
5
12
20
30

7. Ambient Temperature: _____
Over 120°F requires cooling up to 550°F

8. Coolant tubing length:
10 feet (STANDARD)
other _____


9. Filter Assembly:

- A. UV Block Yellow Spot Filter
Dot size: .150 (STANDARD)
.125" (special order)
.090" (special order)
No dot required _____

- ND: 3.3 (STANDARD)
4.0 (special order)
2.0 (special order)

- B. Full Field Dark Spot Filter Assembly
Dot size: .090 (STANDARD)
.125" (special order)
.150" (special order)
No dot required _____

- ND: 2.0 (STANDARD)
4.0 (special order)
3.3 (special order)



- C. Polarized Assembly Filter

10. Spatter Shield, (recommend backup or kit)

11. 9 PC. Filter with Key Kit
1 UV Yellow Spot Filter Assembly
1 Dark Spot Filter Assembly
6 Spatter Shields
1 Filter Key

12. Accessories
 - Right Angle Adapter
 - Extension or In-line Cables
 - Monitor
 - Mini Ball head fixture

focal length	max aperture ratio	FOV (vert. x hor.)
30 mm	1:6	5.2° x 7°
18 mm	1:3.3	11.6° x 15.5°
11 mm	1:2	18.8° x 24.9°

Business: _____

Contact: _____

Title: _____

Mailing Address: _____

City: _____

State: _____ Zip: _____

Shipping Address: _____

City: _____

State: _____ Zip: _____

Telephone: _____

Fax: _____

E-mail: _____

Notes: _____

How did you hear about InterTest? _____
