




TELESPAR®
PERFORATED

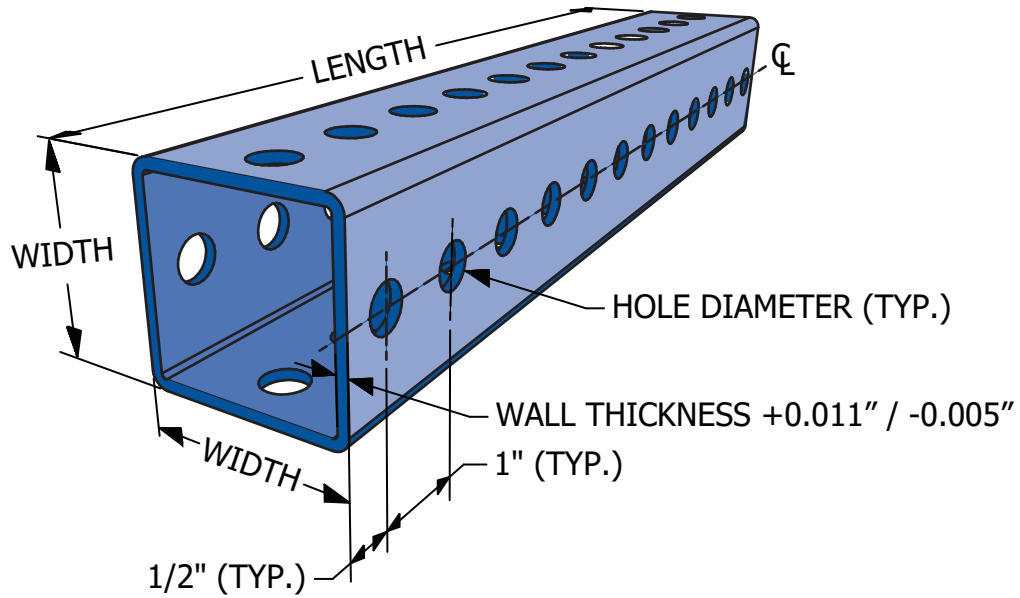

PART NUMBER	WIDTH	WALL THICKNESS	HOLE DIAMETER	AREA (in ²)	I (in ⁴)	S (in ³)	r (in)	WEIGHT (lbs/ft)
12F12	1-1/4" ± 0.006"	12ga. (0.105")	11/32" ± 1/64"	0.315	0.07	0.112	0.472	1.43
14F12	1-1/2" ± 0.006"	12ga. (0.105")	7/16" ± 1/64"	0.380	0.129	0.172	0.582	1.70
16F12	1-3/4" ± 0.008"	12ga. (0.105")	7/16" ± 1/64"	0.485	0.231	0.264	0.690	2.06
20F12	2" ± 0.008"	12ga. (0.105")	7/16" ± 1/64"	0.590	0.372	0.372	0.794	2.42
22F12	2-1/4" ± 0.010"	12ga. (0.105")	7/16" ± 1/64"	0.695	0.561	0.499	0.898	2.77
24F12	2-1/2" ± 0.010"	12ga. (0.105")	7/16" ± 1/64"	0.803	0.804	0.643	1.001	3.14

MATERIAL & FINISHES

PL: ASTM A1011 SS GR50
PG: ASTM A653 SS GR50, G90

LENGTH TOLERANCES


LENGTH:
To allow for subsequent cutting, standard length members are 2" ± 1/8" longer. Tubes can be supplied in special lengths.

Project: _____	Approval Stamp: _____
Architect / Engineer: _____	
Date: _____ Phone: _____	
Contractor: _____	
Address: _____	
Notes 1: _____	
Notes 2: _____	



TELESPAR®

NON-PERFORATED

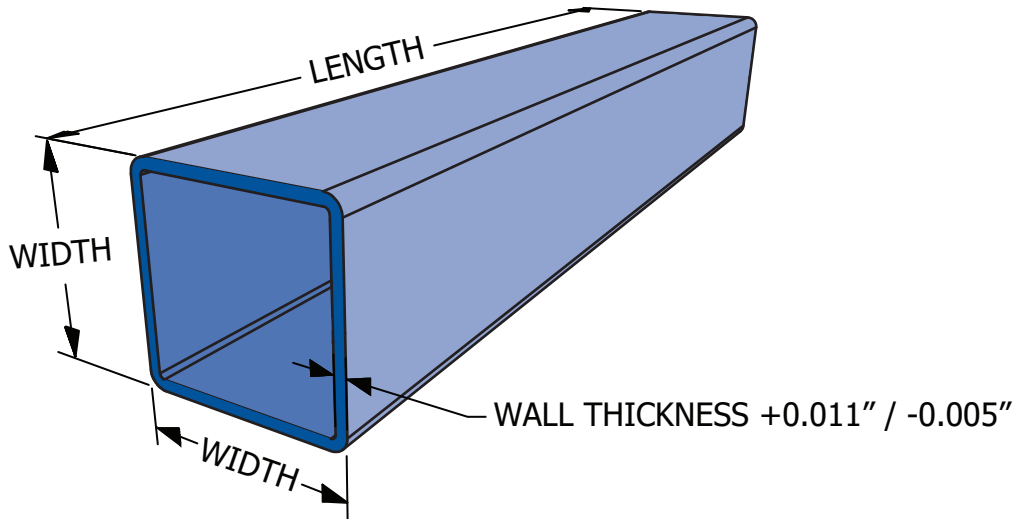

PART NUMBER	WIDTH	WALL THICKNESS	AREA (in ²)	I (in ⁴)	S (in ³)	r (in)	K	WEIGHT (lbs/ft)
12F10	1-1/4" ± 0.006"	12ga. (0.105")	0.459	0.093	0.148	0.450	0.158	1.56
14F10	1-1/2" ± 0.006"	12ga. (0.105")	0.564	0.175	0.234	0.557	0.285	1.92
16F10	1-3/4" ± 0.008"	12ga. (0.105")	0.669	0.294	0.336	0.663	0.467	2.28
20F10	2" ± 0.008"	12ga. (0.105")	0.774	0.456	0.456	0.768	0.715	2.63
22F10	2-1/4" ± 0.010"	12ga. (0.105")	0.879	0.668	0.594	0.872	1.036	2.99
24F10	2-1/2" ± 0.010"	12ga. (0.105")	0.987	0.937	0.749	0.974	1.443	3.36

MATERIAL & FINISHES

PL: ASTM A1011 SS GR50
PG: ASTM A653 SS GR50, G90

LENGTH TOLERANCES

LENGTH:
 To allow for subsequent cutting, standard length members are 3/8" ± 1/8" longer. Tubes can be supplied in special lengths.

Project: _____ Architect / Engineer: _____ Date: _____ Phone: _____ Contractor: _____ Address: _____ _____ Notes 1: _____ _____ Notes 2: _____ _____	Approval Stamp: _____
---	---