

OIL COOLER GUARD FOR 2018+ H-D SOFTAIL

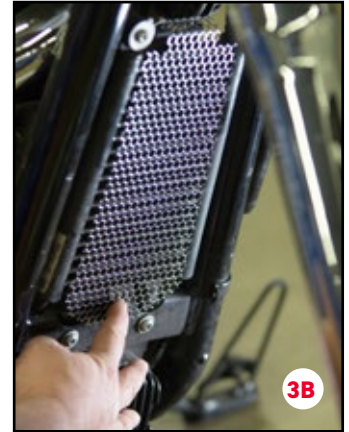
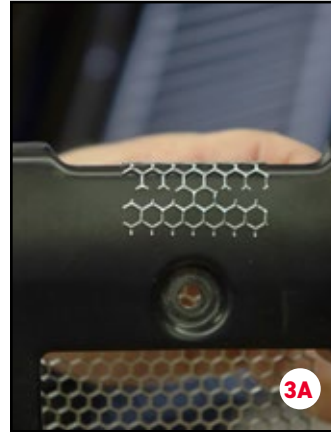
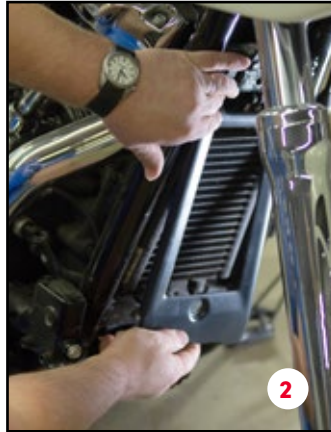
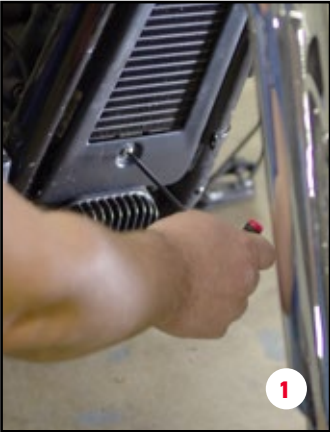
TOOLS NEEDED:

- T27 Torx

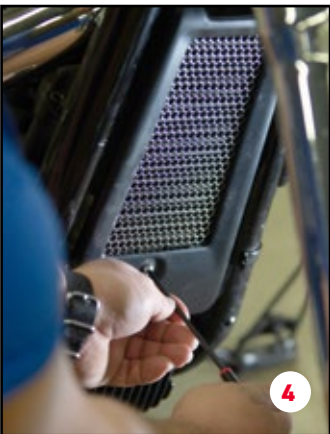
INCLUDED COMPONENTS:

+ Oil Cooler Guard
+ Installation Instructions

QUESTIONS?

EMAIL:
info@getklocked.comCALL:
(605) 996-3700

1. Remove oil cooler cover bolt. **(FIG 1)**
2. Remove oil cooler cover, rotate the bottom forward allowing the top to move back freeing the slots from the alignment tabs. **(FIG 2)**
3. Install guard over the alignment tabs on the back of the oil cooler. **(FIG 3A AND 3B)**



4. Re-install the oil cooler cover and align the bolt through the cover and guard. Tighten to factory recommendations. **(FIG 4)**