

Providing effective Temporary Access and Ground Protection for heavy plant and machinery with its highly engineered 'non-slip' traction surface.

## Specifications

Size	2.4m (L) x 1.2m (W) x 12mm (D) Half size: 2.4m (L) x 0.6m (W) x 12mm (D)
Weight	35Kg / 18Kg
Load	Suggested 80 tonnes, weight tested up to 120 tonnes (depending on ground conditions)
Material	100% Recycled High Density Polyethylene (HDPE) and 100% recyclable
Features	<ul style="list-style-type: none"> <li>Non-slip surface for optimal grip</li> <li>6 carry handles on each side</li> <li>Surface unaffected from sunlight/other weather conditions   Top: High profile vehicular traction surface for optimal grip   Bottom: Non-slip pedestrian surface</li> <li>Durable and no wearing down over time</li> <li>Easy clean/wipe/jet washed</li> </ul>
Preventative	Maximises support and mud suppression with minimal disturbance to protect the ground and grips diminish accidents
Preparation	Geotextile is recommended prior to easily laying these mats on top
Ecosystem	Avoids property, heritage and environmental damage, plus reinstatement
Storage	Compact, pile on top of each other or contain in stillage (ask for our options)
Accessories	2-way or 4-way Connection Systems using multiple connection points



A variety of Steel Fabricated Stillages are available.

- Construction
- Civil Engineering
- Groundworkers
- Outdoor Events

**max 80 tonnes**



**35/18Kg**



## Purpose

- ✓ Temporary Access & Ground Protection
- ✓ Prevent ground damage from weather
- ✓ Low profile non-slip surface or access to pedestrians and vehicles
- ✓ Reduces vehicle bogging

## Additional Products

As an alternative option, please take a look at our Heavy Duty Roadway Panels or Steel Road Plates or EuroTrak HD Access Mats.

## Delivery

We hold most stock, so whether you require same/next day or standard delivery, here are the options to receive products.



Same day\*




Next day\*



Standard 3 days

**Typical enquiries handled within 1 hour from receiving your call.**

\*Depending on stock availability when placing order

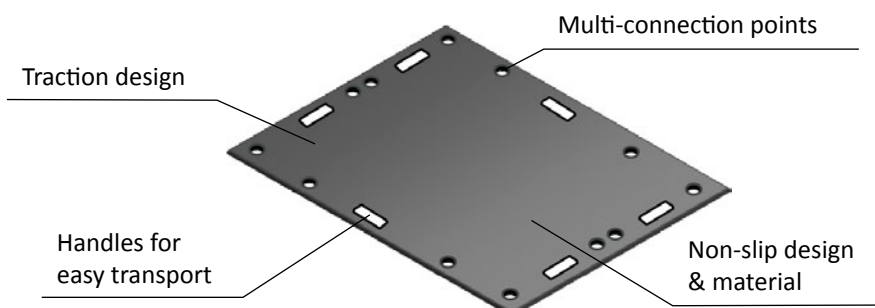

We advise not to use Steel Tracked vehicles with any composite mats unless pre-authorized and agreed beforehand. Traversing and aggressive movement on the mats may cause damage to them and the connectors, and this will be the sole responsibility of the customer and user of the mats.

# Installation Guide

## Step 1 - Preparation

Before E-Mat Heavy Duty Access Mats are installed, it is recommended and where possible that the ground is graded and levelled before use. All large projections and objects must be removed.



## Step 2 - Assembly

Ideally, a geotextile should be laid out prior to installation. This will prevent soil contaminating the top surface whilst still allowing water to drain away and will also help to prevent mud and dirt from coming up between the gaps of the mats.



## Step 3 - Laying

E-Mat Heavy Duty Access Mats should be lifted by two people and you must ensure correct manual handling procedures are followed at all times. The mats have 6 hand holes at each side of the board to aid manual handling.

Drag hooks are available to help move boards into position to avoid heavy lifting.



## Step 4 - Connecting

Using the 2-way connectors to join E-Mats side-by-side or the 4-way connectors to join four E-Mats in a grid. From the multiple connection points on the E-Mat, tighten with standard bolts and oversized washers before using any plant or machinery on the system.

Be aware not to over tighten the bolt to allow for room of movement and also expansion of the mats in hot weather conditions.



We recommend using either standard spanners, a wrench or a battery operated drill to tighten the bolts. We do not advise using air-drills as this can cause over-tightening of the bolts. Please be sure not to over tighten bolts, as this can cause cross-threading and damage to the connectors. Additional reinforcement plates can be used for longer term or heavy weight projects.

## Handling and Storage

E-Mat Heavy Duty Access Mats are delivered to site in pre-wrapped packs. The mats are packaged 30 units per pallet and banded with polyester strips. Pallets are incorporated into the packaging to aid the use of mechanical handling with apparatus such as fork-lifts and lifting booms with slings. These mats should be stored in original packaging on a flat, solid and free draining storage area and we recommend the banding should not be removed when storing them, unless when safely positioned at ground level or until ready for use. Gloves should be worn when handling these E-Mat Heavy Duty Access Mats.

## Installation Timings



2 people required. Hand holes at each side to aid manual handling



Single line connection in 3-5 mins



Grid connection Grid connection in less than 7-10 mins



250m<sup>2</sup> area in approx. 3 hours (depending on ground conditions and site layout)



When driving on the mats, do not exceed 5mph

When assessing ground conditions on site we advise seeking professional engineering guidance if there is any doubt. It is the users responsibility to assess the load-bearing capacity of the ground, and to only operate vehicles within the weight that the ground is capable of safely supporting. We accept no liability whatsoever from any damage, loss or injury arising from the installation and ground conditions on which these products are used.