
EASY BLINDS

FAUX WOOD BLINDS

Measurement Manual

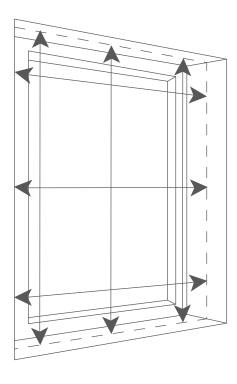

EASY MEASURMENT TIPS

- 1. Use a steel tape measure for best accuracy.
- 2. Round each measurement to the nearest 1/8".
- Always record width (side to side) first, and then height (top to bottom).

INSIDE MOUNT

An inside mount is designed to install inside the window casing. Simply measure the width and height of the inside edge of the window frame. From there, we will make necessary deductions.


Take 3 measurements of both width (side to side) and the height (top to bottom), use the smallest measurement for the width and largest for height.

Our factory will make necessary deductions to ensure your product fits in your window (usually 3/8" on width). Do not deduct anything yourself.



Easy Tip:

Make sure the frame around the window is deep enough for your blind, and take note of any handles or other obstructions. For a flush mount inside frame, a 2" depth is needed.

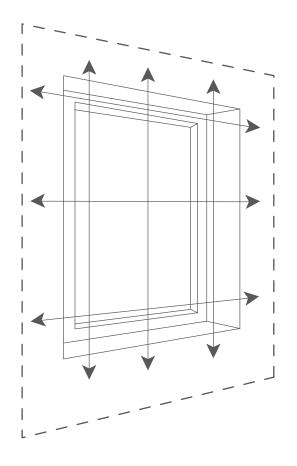


An outside mount, the blinds covers the window opening and frame. Simply measure the width and height of the window frame and make additions to your measurements. For outside mount, the blind is made to your measurements.

To keep as much light out as possible, we suggest that the blind go over the window frame. Add least 3" at the top and 3" each side (6" total) to your measurements. Or adjust the additions as you like.

At the bottom of the blind, you can choose to have a overlap. However, do consider obstacles and window sills when making this choice.


VALENCES

The valance will be cut to the appropriate size depending if the blind is ordered for inside mount or outside mount.



VALENCE FOR INSIDE MOUNT

When you order inside mount, we will make the valance 1/8" smaller than the width of your blind so that it fits snugly at the top.



VALENCE FOR OUTSIDE MOUNT

When you order an outside mount, we will make your valance wider than the blind and include side returns, so that no brackets show on either side.