
2

Connection type

GEL BOX system (with well)



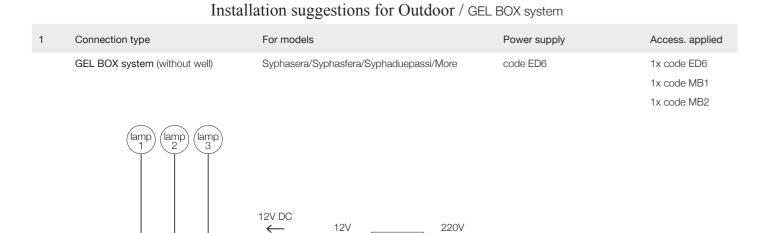

ED6

MB2

Syphasera/Syphasfera/Syphaduepassi/More

 \leftarrow

For models

220V

MB1

1 mains voltage


Power supply

provided by client

Access. applied

1x code MB2

1x code KP1

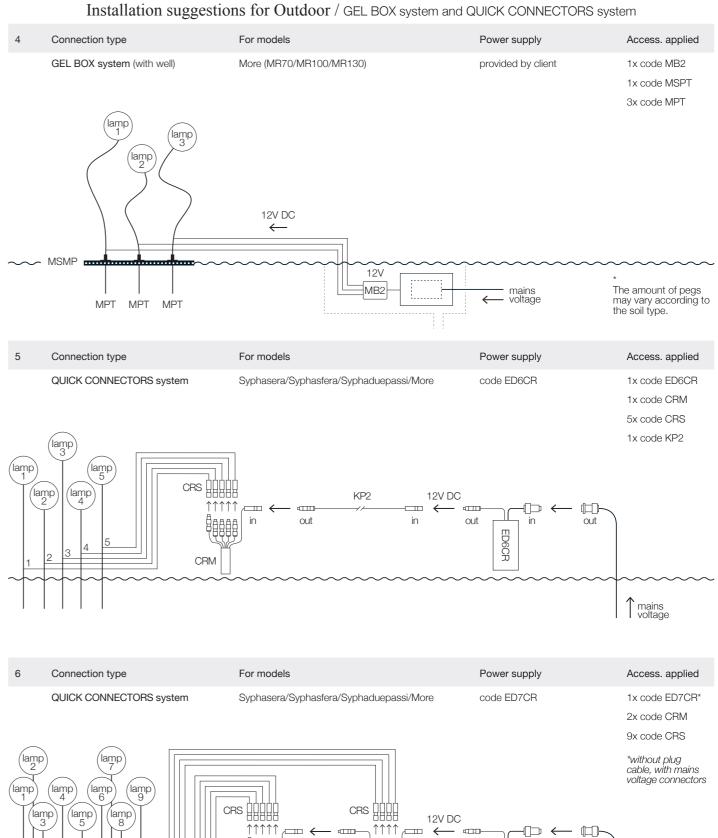

out

in


⊕ \leftarrow


in


ED7CR


out


5	Connection type	For mode	ls		
		o	(O	 ~ .	

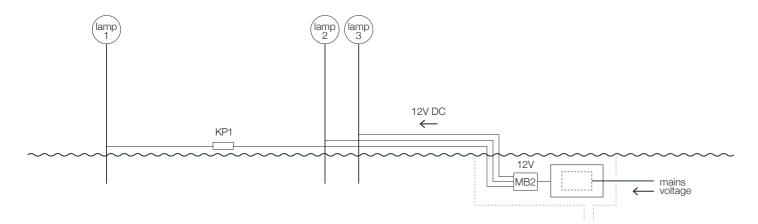

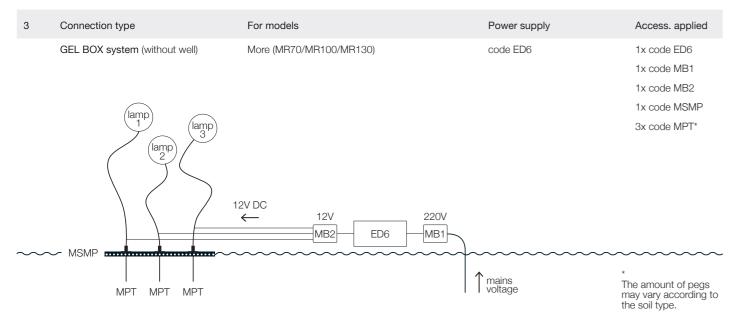

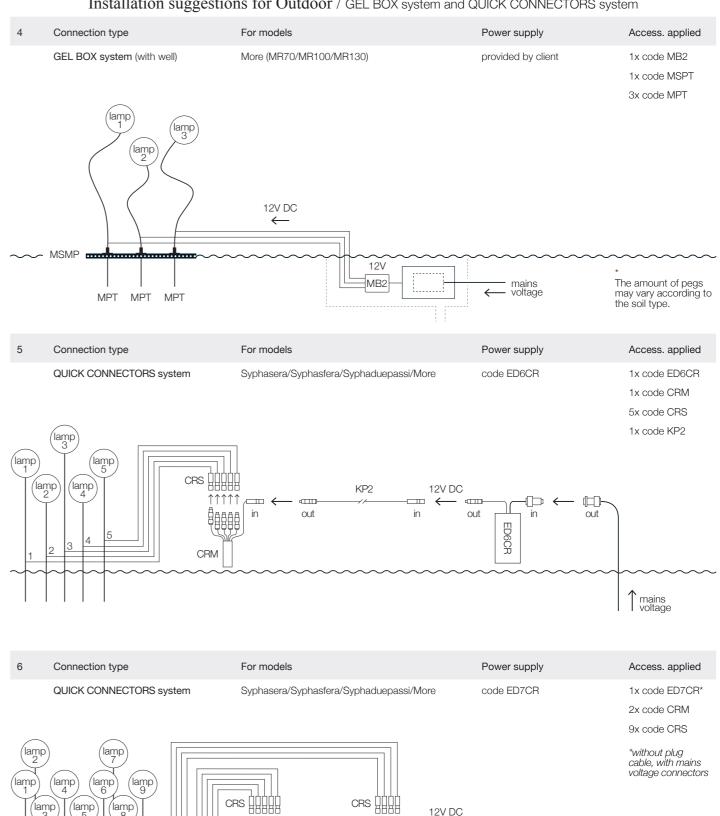

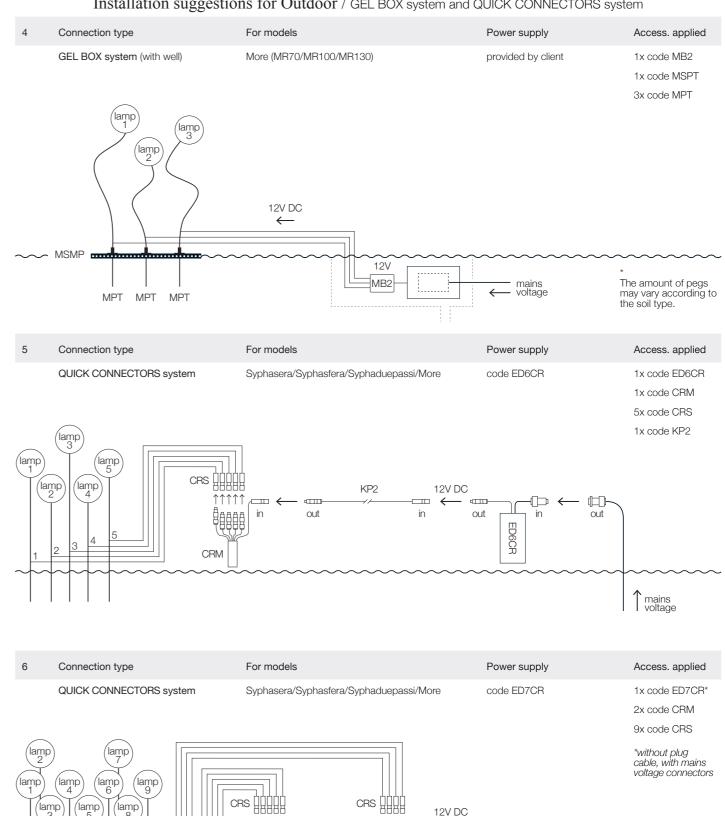

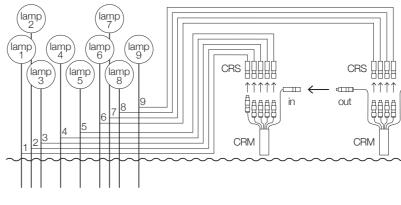





nains voltage



	MB1 M	lini gel box IP68			ED6CR	Driver 10W 12
	5,	,3x3,9x2,4 cm			-	230V and 12V
	(n	nax 2 connections - connectors included)				3,7x2,3x7 cm -
						not dimmable
				L.		(max 6 lamps)
	MB2 M	lini gel box IP68			CRM	Quick IP68 m
	5,	,2x5,3x2,9 cm			(max 5 connectio	
	(n	nax 6 connections - connectors included)				
	KP1 E	ixtension cord kit			CRS	Quick IP68 IN
	5	mt				
X	w	vith mini gel box IP68 for single connection				
	n)	nax 1 lamp)				
	ED6 D	Driver 10W 12V DC 220-240V IP67			KP2	Extension cor
Y	73	x3,7x2,3 cm / cables 45 cm ca.				5 mt
	no	ot dimmable	©⊡©===================================			(max 1 lamp)
	(n	nax 6 lamps)				
2						

0W 12V DC 220-240V IP67
d 12V connectors included
7 cm - cables 45 cm ca.
nable
amps)
268 multiple connector / 1 IN & 5 OUT 12V
nnections)
268 IN single connector
on cord kit with quick IP68 connectors CRS
amp)