



LJ Rocker Guards Installation Instructions

Thank you for purchasing our Jeep LJ Rocker Guards!

Installation Notes:

- All hardware is stainless steel to prevent corrosion. Hardware will need installed by hand with antiseize to prevent galling.
- This product is designed to fit a 2004-2006 Jeep Wrangler LJ
- Drilling into the body of your Jeep is required for installation.
- Refer to your factory service manual when removing any factory components
- Trimming of the factory fender flares may be required for installation

Tools required:

- Drill
- 3/8" Drill Bit
- 16MM Socket
- 8MM Socket
- 7/32" Allen Socket
- 9/16" Wrench
- 1/2" Ratchet
- 3/8" Ratchet
- Floor Jack
- Antiseize

Contents of box

Bill of Materials for B4WK12680			
QTY	Part Number	Etch Number	Description
1	B4W188914	914CB	LJ Rocker Guard Passenger
1	B4W188922	922CB	LJ Rocker Guard Driver
12	37C100KFCS	NA	3/8-16 x 1 Counter sunk SS bolt
12	37CNNES	NA	3/8-16 Stainless Nylock
12	37NWUSS	NA	3/8" USS Flat Washer SS

Step 1:

Park the Jeep on a level surface and remove the front and rear fender flares on the passenger side.

Step 2:

Remove the three center body mount bolts

Step 3:

Place the floor jack under the body near the front of the door. Lift the body until there is enough room between the body bushings and the tub of the Jeep for the rocker to slide in between.

Step 4:


Slide the rocker guard in between the body bushing and the tub and let the jack down making sure the ends of the rocker guard are lined up with the body.

Step 5:

Reinstall the body bolts removed in step 2

Step 6:

Center mark the six holes along the top of the rocker guard. Drill these locations with a 3/8" drill bit. Making sure there is nothing on the inside of the tub that the drill bit may damage.

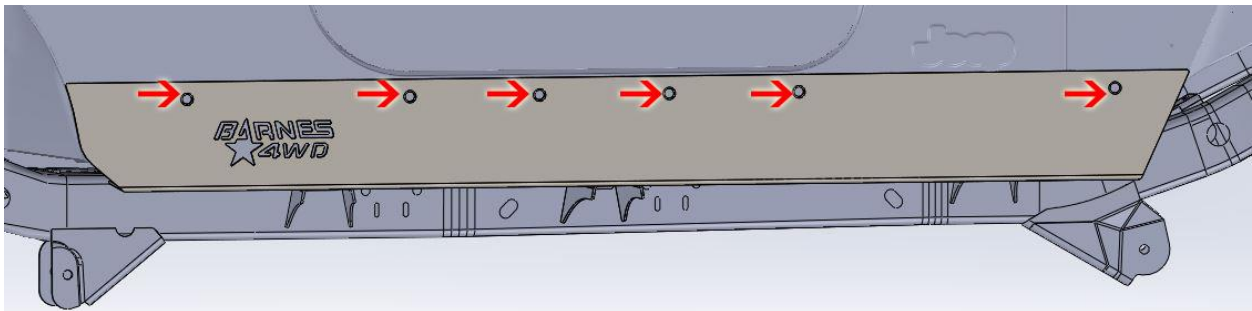

Step 7:

Install the supplied hardware through these six holes.

Step 8:

Reinstall the fender flairs on your jeep. Trimming of the flares may be required for reinstallation.

Step 9:

Repeat steps 1 threw 8 on the opposite side of the Jeep.

Congratulations! You Have finished the installation of the Barnes4wd LJ Rocker Guards.

Professional Services Disclaimer:

The content of all pages of this website (collectively, the "Website"), such as text, graphics, images, information and other material (collectively, "Content") is for informational purposes only. Any information furnished on this Website is not intended nor implied to be automotive advice and is not intended to replace personal consultation with a qualified automotive service technician, mechanic, or similar automotive professional.

Barnes 4WD has not examined the Content for accuracy, timeliness, completeness, appropriateness, or helpfulness. Barnes 4WD does not endorse any specific tests, products, procedures, opinions, or other information that may be mentioned on this Website. Your reliance upon information and Content obtained by you at or through this Website is solely at your own risk. IN NO EVENT SHALL BARNES 4WD BE LIABLE OR OTHERWISE RESPONSIBLE FOR ANY DAMAGE OR INJURY (INCLUDING DEATH) TO YOU, OTHER PERSONS, OR PROPERTY ARISING FROM ANY USE OF ANY PRODUCT, INFORMATION, IDEA, OR INSTRUCTION CONTAINED IN THE CONTENT.

BARNES 4WD DOES NOT MAKE ANY REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, AT LAW OR IN EQUITY, WITH RESPECT TO ANY PRODUCT FEATURED ON THE WEBSITE, INCLUDING WITHOUT LIMITATION WITH RESPECT TO MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, VALUE, VALIDITY, OR ENFORCEABILITY, AND ANY AND ALL SUCH OTHER REPRESENTATIONS OR WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED.