


# TARANTULA REPRODUCTION BAR



## Specifications

PPF ( $\mu\text{mol/s}$ )	43	Power Factor	>0.9
System Efficiency ( $\mu\text{mol/J}$ )	2.4	Mounting Recommendations	8" to 12" above canopy 10" to 12" between each fixture
Input Power	18W	Daisy-Chaining (Through Wiring)	Max. 36 units (120Vac) Max. 70 units (240Vac) Max. 80 units (277Vac)
Input Voltage & Frequency	120 ~ 277Vac & 50 / 60Hz	Waterproof Rating	IP 66
Max. Input Current	0.158A (120Vac) 0.084A (240Vac) 0.073A (277Vac)	Power Cord & Plug Type	4ft AWG #18 (NEMA 5-15P)
Color Temperature	9,000K	Manufacturer's Warranty	5 Year
Fixture Lifetime	>50,000hrs	Conforms to	UL8800 UL1598 CSA C22.2#250.0
Max. Ambient Temp.	40°C / 104°F		


# Spectrum

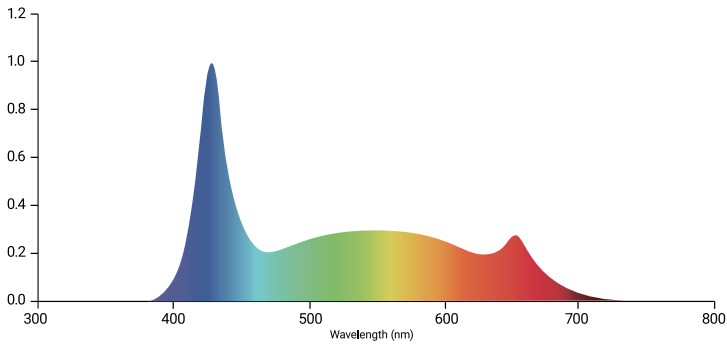

# Packaging


Outer Carton Size	47.24" × 25.59" × 7.48" (120cm × 65cm × 19cm)
Weight	37.7lbs (17.1kg)
Qty./Ctn.	20 sets (10 pairs)
Inner Carton Size	46.85" × 5.52" × 3.54" (119cm × 14cm × 9cm)
Weight	3.45lbs (1.57kg)
Qty./Ctn.	2 sets (1 pair)

# Dimensions(mm/")



# Contents

- A: Lighting Fixtures (2X)
- B: Input Cable and Plug (1X4ft)
- C: Daisy Chain Cable & Connectors (AC) (1X2ft)
- D: Stainless Steel Clips (4X)
- E: Zip Ties (8X)
- F: End Cap (1X)

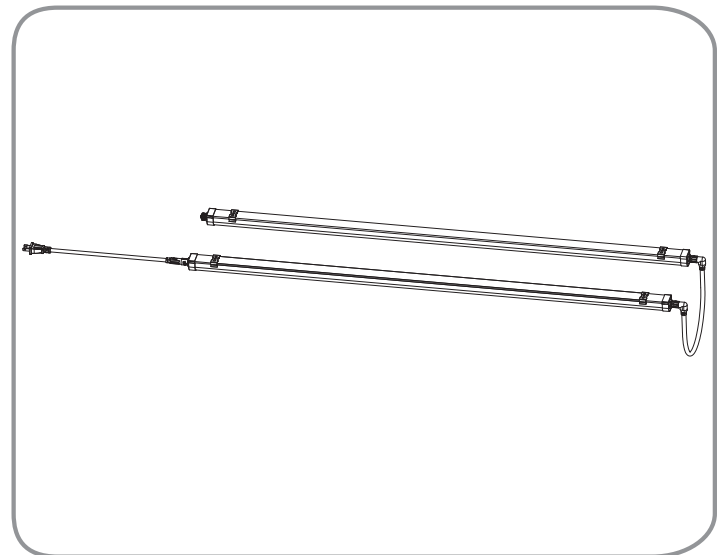

# Installation