



ALBION®

// THE CASTER EXPERTS

// NEW OPTIONS - NOW IN STOCK!

FIELD INSTALLABLE BRAKE (6" AND 8" MODELS)

OPTIONAL K PLATE (4 1/2" X 6 1/4") NOW AVAILABLE

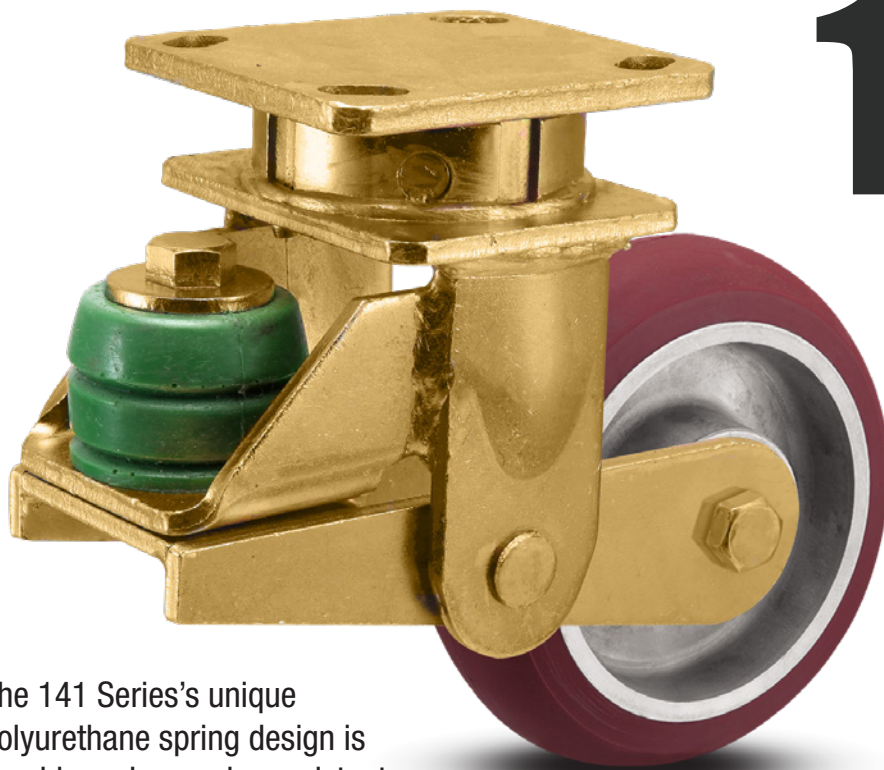

141 SERIES

Kingpinless Contender Poly Spring Caster

FEATURES


- Protects cargo from damaging shocks and unwanted vibration
- Unique polyurethane spring design is durable and corrosion resistant
- Quiet-rolling, rugged kingpinless caster rig
- Extended Lead reduces towing "chatter" noise during operation
- 5", 6", and 8" wheel diameters available to meet overall load height and application requirements

The 141 Series's unique polyurethane spring design is durable and corrosion resistant

3D CAD MODELS

AVAILABLE ONLINE

Visit website for details.



WORK SAFER AND MORE EFFICIENTLY // with the Albion 141 Series

www.AlbionCasters.com

141

Kingpinless Contender Poly Spring Caster

CAPACITY TO 1,500 LBS.


This Poly Spring caster has been designed with features tailored to meet the varied needs of aviation ground support operations, automotive industry, and warehouse distribution. 141 Series casters are equally at home in other extremely abusive and rugged applications.




Premium Quality



Towing*



Noise Reduction




Load Protection

TYPICAL APPLICATIONS

- Aircraft tripod jacks
- Portable medical equipment, computer equipment
- Any shock-sensitive load
- Automotive seat racks
- Tilt carts
- Heavy-duty toolboxes
- Distribution/Warehouse transport carts

MOUNTING OPTION




SWIVEL CROSS SECTION



ADDITIONAL MOUNTING PLATE

Optional PATK

To order, include PATK at end of model number.

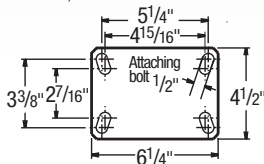


*Consult factory prior to ordering to ensure selection supports your towing requirements.

ADDITIONAL FEATURES


- Solid spring material features no spring coil where debris can jam spring action.
- Yellow Dichromate finish is attractive and features better corrosion resistance compared to zinc plating.
- Longer swivel lead allows the caster to index more quickly into in-line position for easier movement.
- The 141 Series casters have a wheel deflection of .40" at 1,000 pounds per caster.

POPULAR ACCESSORIES



Field-installable swivel lock

+ For swivel lock models, add "L" to end of part number



Field-installable brakes (available only on the 6" and 8")

+ For brake models, add "B" to end of base caster number.

BEARING OPTIONS



(28) Precision ball

+ For rigid models, change "S" to "R" at end of base caster number.

Wheel Diameter (inches)
Tread Width (inches)
Capacity (Lbs.) (Rated for manual operation)
Overall Height (inches)
Swivel Lead (inches)
Base Caster Number+

Polyurethane on Aluminum (28 Precision Ball Bearing)

AX	5	2	1,000	7 1/2	3	141AX05228S
	6	2	1,250	8	3	141AX06228S
	8	2	1,500	10 1/8	3	141AX08228S

85 Shore A

Polyurethane on Aluminum (28 Precision Ball Bearing)

PM	5	2	1,000	7 1/2	3	141PM05228S
	6	2	1,250	8	3	141PM06228S
	8	2	1,500	10 1/8	3	141PM08228S

95 Shore A

Polyurethane on Durometer (28 Precision Ball Bearing)

PM 80A	5	2	1,000	7 1/2	3	141PM05228S80A
	6	2	1,250	8	3	141PM06228S80A
	8	2	1,500	10 1/8	3	141PM08228S80A

80 Shore A

Magnum Polyurethane on Aluminum Round Tread (28 Prec. Ball Bearing)

UA	6	2	750	8	3	141UA06228S
	8 <td>2 <td>900 <td>10 1/8</td> <td>3 <td>141UA08228S </td></td></td></td>	2 <td>900 <td>10 1/8</td> <td>3 <td>141UA08228S </td></td></td>	900 <td>10 1/8</td> <td>3 <td>141UA08228S </td></td>	10 1/8	3 <td>141UA08228S </td>	141UA08228S



Blue
Shore 95A Standard



UA Red
Shore 80A

6" = 500 capacity
8" = 800 capacity



UA Orange
Shore 73D

6" = 1,000 capacity
8" = 1,200 capacity



UA Black
Shore 70A

6" = 410 capacity
8" = 500 capacity

To order color/durometer, enter durometer code at end of model. Red wheel example: 141UA08228S80A.

To specify Rigid or Swivel, insert "R" or "S" before last 3-digit durometer code. Rigid example: 141UA08228R80A.

X-tra Soft Rubber Flat Tread (28 Precision Ball Bearing)

XS	5	2	500	7 1/2	3	141XS05228S
	6 <td>2 <td>600 <td>8 <td>3 <th>141XS06228S</th> </td></td></td></td>	2 <td>600 <td>8 <td>3 <th>141XS06228S</th> </td></td></td>	600 <td>8 <td>3 <th>141XS06228S</th> </td></td>	8 <td>3 <th>141XS06228S</th> </td>	3 <th>141XS06228S</th>	141XS06228S
	8 <td>2 <td>675 <td>10 1/8</td> <td>3 <th>141XS08228S</th> </td></td></td>	2 <td>675 <td>10 1/8</td> <td>3 <th>141XS08228S</th> </td></td>	675 <td>10 1/8</td> <td>3 <th>141XS08228S</th> </td>	10 1/8	3 <th>141XS08228S</th>	141XS08228S

X-tra Soft Rubber Round Tread (28 Precision Ball Bearing)

XR	6	2	450	8	3	141XR06228S
	8 <td>2 <td>600 <td>10 1/8</td> <td>3 <th>141XR08228S</th> </td></td></td>	2 <td>600 <td>10 1/8</td> <td>3 <th>141XR08228S</th> </td></td>	600 <td>10 1/8</td> <td>3 <th>141XR08228S</th> </td>	10 1/8	3 <th>141XR08228S</th>	141XR08228S

Neoprene on Aluminum (28 Precision Ball Bearing)

NP	5	2	600	7 1/2	3	141NP05228S
	6 <td>2 <td>700 <td>8 <td>3 <th>141NP06228S</th> </td></td></td></td>	2 <td>700 <td>8 <td>3 <th>141NP06228S</th> </td></td></td>	700 <td>8 <td>3 <th>141NP06228S</th> </td></td>	8 <td>3 <th>141NP06228S</th> </td>	3 <th>141NP06228S</th>	141NP06228S
	8 <td>2 <td>700 <td>10 1/8</td> <td>3 <th>141NP08228S</th> </td></td></td>	2 <td>700 <td>10 1/8</td> <td>3 <th>141NP08228S</th> </td></td>	700 <td>10 1/8</td> <td>3 <th>141NP08228S</th> </td>	10 1/8	3 <th>141NP08228S</th>	141NP08228S

Solid Elastomer (28 Precision Ball Bearing)

SE	5	2	1,000	7 1/2	3	141SE05228S
	6 <td>2 <td>1,100 <td>8 <td>3 <th>141SE06228S</th> </td></td></td></td>	2 <td>1,100 <td>8 <td>3 <th>141SE06228S</th> </td></td></td>	1,100 <td>8 <td>3 <th>141SE06228S</th> </td></td>	8 <td>3 <th>141SE06228S</th> </td>	3 <th>141SE06228S</th>	141SE06228S
	8 <td>2 <td>1,200 <td>10 1/8</td> <td>3 <th>141SE08228S</th> </td></td></td>	2 <td>1,200 <td>10 1/8</td> <td>3 <th>141SE08228S</th> </td></td>	1,200 <td>10 1/8</td> <td>3 <th>141SE08228S</th> </td>	10 1/8	3 <th>141SE08228S</th>	141SE08228S

— A BRAND OF —
colson GROUP THE GLOBAL LEADER
IN CASTERS AND WHEELS

© Copyright 2019 | Colson Group USA | AlbionCasters.com
Specifications subject to change without notice.

www.AlbionCasters.com

800 North Clark Street
Albion, MI 49224
Phone: 800-835-8911

ALBION