




### Features

- Stainless steel mounting plates and attaching glare guards
- Extruded aluminum for durability
- Integrated LED chips for color consistency and longevity
- LEDs and driver encapsulated in resin for moisture protection
- 5-Year Warranty
- Length: 13 IN



### Product Dimensions



### Package Contents

- Fixture
- Mounting Bracket
- Wire Connectors
- Screws

customersupport@coloyer.com / (626) 699-4666

1

### PLEASE READ BEFORE INSTALLATION

Luminaires must be installed in accordance with the National Electrical Code (NEC) and local codes. Failure to do so will void the warranty and may result in serious injury and/or damage to the luminaire. These instructions do not intend to cover all variations in installation, operation maintenance or mounting situations.

### INSTRUCTIONS PERTAINING TO A RISK OR FIRE, OR INJURY TO PERSONS

#### IMPORTANT SAFETY INSTRUCTIONS THE LIGHTED LAMP IS HOT!!

#### WARNING-TO REDUCE THE RISK OR FIRE, OR INJURY TO PERSONS

customersupport@coloyer.com / (626) 699-4666

2

### SAFETY WARNING

Luminaire can become very hot depending on lamp wattage used. Lens and metal around lamp can become hot enough to blister hands. Particular care should be taken not to locate luminaires where small children can reach them if high wattage lamps are used.

- Turn off/unplug and allow to cool before replacing lamp.
- Lamps get hot quickly ! Contact only switch/plug when turning on.
- Do not touch hot lens, guard or enclosure.
- Keep lamp away from material that may burn.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may amage lamp.
- Do not operate luminaire with a missing or damaged parts.
- Luminaires shall not be installed within 10 feet(3m) of a pool, spa or fountain.
- Do not use tungsten halogen lamps unless the luminaire is marked for halogen use.

customersupport@coloyer.com / (626) 699-4666

3


### Transformer Installation

**Step 1**  
Select a transformer (sold separately).

**Step 2**  
Locate a 120V power outlet to plug in transformer.

**Step 3**  
Locate the lead with connected 15ft wire coming from the transformer. Remove the cap (save for later use) and run wire to the location of first fixture. Note: If an additional wire is needed to reach first fixture, 10ft and 20ft extensions are available (sold separately).

**Step 4**  
The 2nd wire lead coming from the transformer is the photosensor. This should be placed somewhere it will receive ambient outdoor light, but no direct light from porch lights, street- lights, etc. Tuck behind the wet location cover or a bush. The photosensor will allow for automatic dusk to dawn operation.

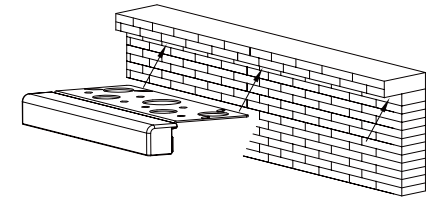

customersupport@coloyer.com / (626) 699-4666

4

THANK YOU FOR CHOOSING **COLOER**  
If you have any installation problems or need help  
Call us! (626) 699-4666  
Please do not hesitate to contact us:  
✉ customersupport@coloyer.com

### Fixture Installation


**Step 1**  
Measure and mark the locations for hardscape light.

**Step 2**  
Begin forcing the masonry chisel between the capstone and the stone below. This is where you will score a line in the stone for the wire.

**Step 3**  
Push the protective brass tube into place, set the fixture in position, and lay the cord in the slot. Drill out about 1/2 to 3/4 of an inch deep for your masonry anchors in the holes you just marked. Place your anchor sleeves in the holes.

**Step 4**  
Set the fixture in the slot. Stick your screws in the anchors, then begin screwing them down.

**Step 5**  
Strip your wire leads and make a good, solid, watertight connection.



customersupport@coloyer.com / (626) 699-4666

5

### Care & Maintenance

- Before attempting to clean the fixture, disconnect power by turning the breaker off or removing the fuse from the box.
- To clean the fixture, use a dry or slightly damp, clean cloth.
- DO NOT use any cleaner with chemicals solvents or harsh abrasives.

### Troubleshooting

If all lights are not working properly

- Check if the power is on.
- Make sure the fixture and transformer are connected properly and the photocell is not receiving any light from other light source such as street light.
- Note: There is a 10-second delay when the photocell starts working.

If partial lights are not working properly


- Check all connections between lights.

### Warranty

**Lifetime warranty(Fixture only)**  
We warrants this light fixture against defects in material and workmanship for lifetime from the date purchase. If within this period the product is found to be defective in material or workmanship, this product must be returned with a copy of receipt as a proof purchase to the original place of purchase. The retailer will, at its option, repair, replace, or refund the purchase price to the original purchaser. Warranty does not include damages due to misuse, accidents, improper handling and /or installation, incidental, or consequential damages. As some states do not allow exclusions or limitations on the implied warranty, the above exclusions and limitations may not apply. This warranty gives you specific rights and you may also have other rights that vary from state to state.

customersupport@coloyer.com / (626) 699-4666

6

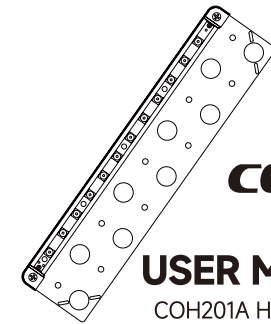

**COLOER**

**USER MANUAL**  
COH201A Hardscape Light

www.coloyer.com

**COLOER**

3979 East Guasti Rd Unit A, Ontario, CA 91761