

LUMUX

BOLLARD

BL201

DATE:

PROJECT:

FIRM:

CATALOG NO:

COMMENTS:



BL201 from Lumux is an elegant architectural bollard that excels at defining spaces, both during the day and at night.

BL201 offers a distinctively contemporary design, ideal for illuminating access ways, paths, and plazas. With zero uplight, BL201 is perfect for dark sky applications. Part of the Lumux bollard collection, BL201 is a powerful LED solution with optional 0-10v dimming, energy-efficient for long-lasting outdoor applications. BL201 is constructed from heavy-duty diecast aluminum, providing durability that meets the highest standards.

up to
750 lm

16.5 w

up to
46 lm/W

LUMUX LIGHTING

7803 Industry Ave, Pico Rivera, CA 90660
sales@lumux.com | 562-801-5100

Content of specification sheet subject to change

LUMUX

BOLLARD BL201

Perfect for path and plaza lighting with zero uplight, BL201 is an elegant bollard with a contemporary design and optional 0-10v dimming.

Ordering Guide

Catalog No.	Wattage	LED Color	Color Temp ¹	Voltage	Finish	Options ²
BL201	16.5W	White	2700K	120-277v	Black	<input type="checkbox"/> 0-10v Dimming <input type="checkbox"/> Photocell <input type="checkbox"/> Occupancy Sensor <input type="checkbox"/> GFCI Dual Receptacle <input type="checkbox"/> Integral Battery Pack
			3000K		White	
			3500K		Silver	
			4000K		Bronze	
					Custom RAL ²	

¹Consult factory for additional options

²Consult factory for additional pricing

Catalog No.: _____

Performance Specifications	
Flux up to 750 lm	LER up to 46 lm/W
Power up to 16.5W	120-277v input voltage
Starting temp. rated to -20°F	Sensor options
0-10v Dimming driver option	Dual GFCI option
Lumen Maintenance*: tbd	Integral Battery Pack option

Environmental Specifications	
BUG rating: B0-U1-G0	Dark sky compliant
CRI 80	Color temperature options
IP65	ETL listed for wet-locations
Effective Projected Area 1.3 sq.ft.	Marine Grade option
5-year limited warranty	Made in the USA

Delivered Lumens & Wattage per color temperature:

	2700K	3000K	3500K	4000K	WATTS
BL201	650 lm	675 lm	700 lm	750 lm	16.5W

For higher lumen packages, please consult the Lumux sales team.

Housing: Heavy-duty construction of corrosion resistant, low copper diecast aluminum. All fasteners are vandal resistant stainless-steel.

Lens: Sealed one-piece, shatter-proof glass optic.

Gasket: Closed-cell silicone foam gasket seals out moisture, dust, and insects, for weather-tight operation. IP65 and ETL listed for wet locations.


Mounting: Secure with galvanized anchor bolts to contractor installed concrete footing.

Installation: Please refer to installation instructions.

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Light Engine: Constant Current driver powering high quality LEDs, with optional 0-10v dimming.

Integral Battery Pack: Optional 10W IBP integral emergency battery pack provides 1,000 lumens with a 90 minute battery life.

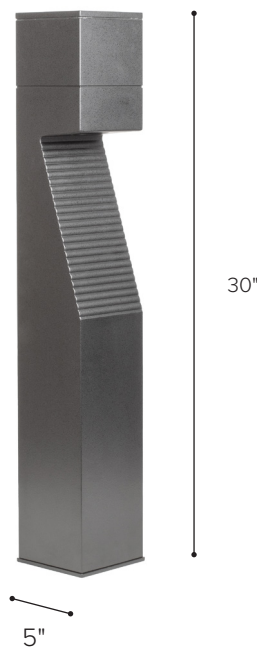

Dimensions

Content of specification sheet subject to change

LUMUX

LUMINAIRES IN THE COLLECTION

BOLLARDS - RECTANGULAR



BL300



BL340



BL344



BL344-TALL



BL700



BL700S



BL201



BL350



BL350S



BL350S-2



BL355



BL1000



BL3502