

LUMUX

UP DOWNS

DL400

The Lumux DL400 is a precision engineered architectural LED wall mounted fixture offering direct and indirect light from a single form-factor with no visible hardware in a sleek, symmetrical design. The fixture is constructed with the highest quality of specification grade materials and component parts, while a shielded light source enhances visual comfort.

Housing: Heavy-duty construction of one-piece, corrosion resistant, low-copper (<1% copper) die-cast aluminum. Enclosed lens secured with vandal resistant, stainless-steel screws.

Lens: 1/8" thick shatter proof clear glass diffuser

Mounting: Wall mounted

Installation: Mounting footplate (refer to diagram)

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F.

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 4W

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens:	2700K	3000K	3500K	4000K
	144Lm	160Lm	186Lm	213Lm


CRI: 90

Warranty: 5 year limited warranty

DATE: _____
PROJECT: _____
FIRM: _____
CATALOG NO.: _____
COMMENTS: _____



Dimensions:

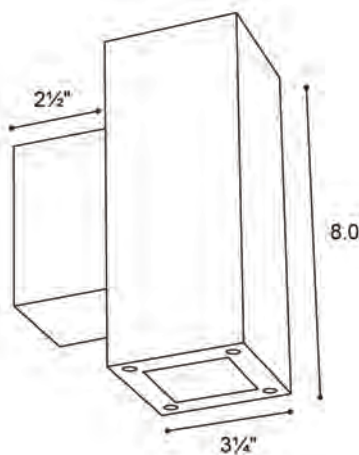

LUMUX

UP DOWNS DL400

DATE: _____

PROJECT: _____

FIRM: _____

CATALOG NO.: _____

COMMENTS: _____

Ordering Guide:


Catalog No.	LED Color	Color Temp ¹	Voltage	Finish
DL400	White	2700K	120/277	Black
		3000K		White
		3500K		Silver
		4000K		Bronze
				Custom RAL ²

¹Consult factory for additional options


Consult factory for compact fluorescent options

Catalog No.: _____

Lighting Distribution Pattern:

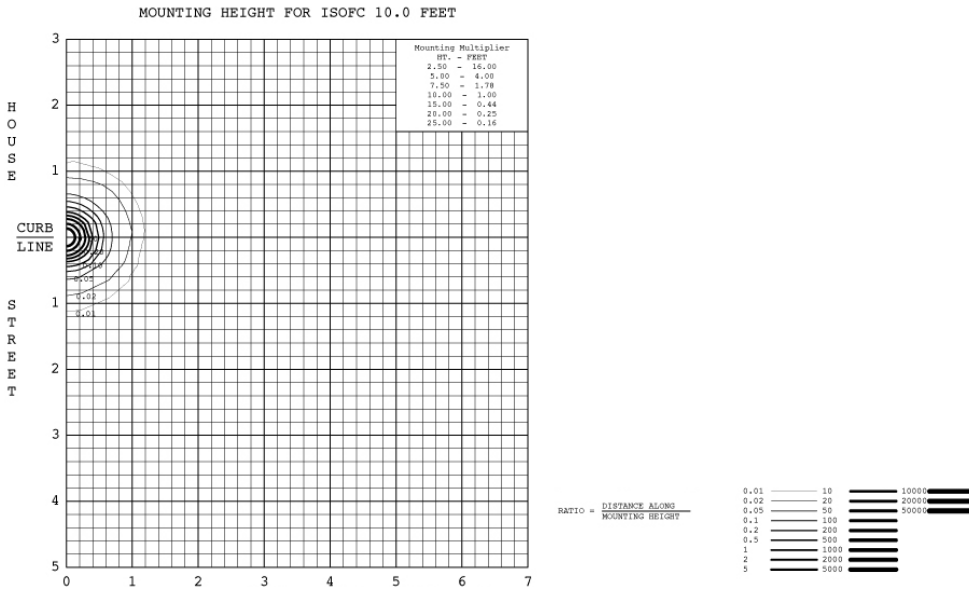

Pendent Details:

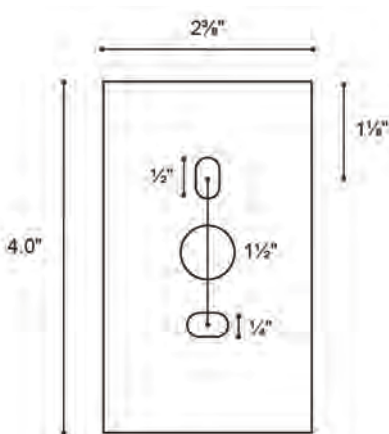

Content of specification sheet subject to change