


DATE:	
PROJECT:	
FIRM:	
CATALOG NO.:	
COMMENTS:	

STEP LIGHT

SLS100 SERIES



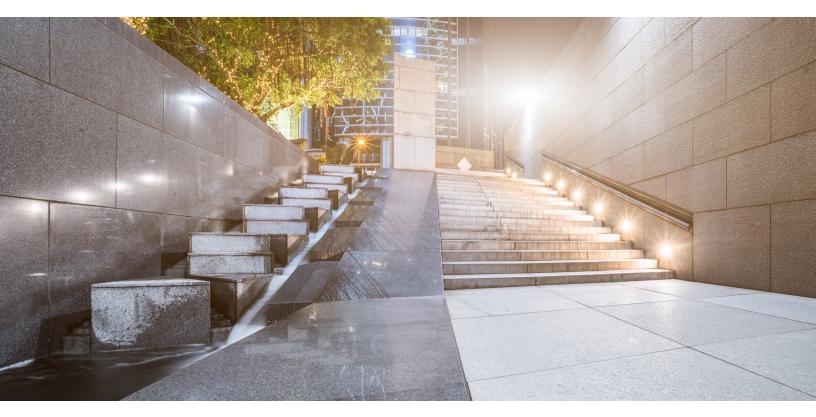





















SLS150

The SLS100 Series luminaires from Lumux are classic architectural step lights, precision engineered for durability and performance.

The SLS100 Series offers ADA LED solutions with a distinctively classic design, ideal for illuminating steps, facades, and walls along access ways. SLS Series step lights are energy-efficient for long-lasting indoor and outdoor applications. SLS Series luminaires feature a powder coated faceplate retaining an impact-resistant diffuser, seamlessly integrated to a durable diecast aluminum housing, with certain models featuring a protective grill or glare-hood to shield the light source.

up to **100** lm

3w

up to **37** lm/W

Content of specification sheet subject to change



DATE:	
PROJECT:	
FIRM:	
CATALOG NO.:	
COMMENTS:	

STEP LIGHT

SLS100 SERIES

The SLS100 Series are classic architectural ADA step and wall lights with faceplate finish options, perfect for campus, resort & residential use.

Ordering Guide

Catalog No.	Wattage	LED Color	Color Temp ¹	Voltage	Finish	Options ²
SLS100 SLS130 SLS150	3W	White Amber-TF Red Green Blue	2700K 3000K 3500K 4000K	120-277v	Black White Silver Bronze Custom RAL ²	O-10V Dimming

¹Consult factory for additional options

²Consult factory for additional pricing

Performance Specifications				
Flux 100 lm (4000K)	LER 37 lm/W			
Power 3W	120-277v input voltage			
Starting temp. rated to -20°F				
0-10v Dimming Driver option				
Lumen Maintenance*: tbd				







SLS130 SLS150

Dimensions

Catalog No.: _

Environmental Specifications			
BUG rating: tbd	Amber-TF turtle-friendly option		
CRI 80	Color temperature options		
IP65	ETL listed for wet-locations		
Effective Projected Area: n/a	Marine Grade option		
5-year limited warranty	Made in the USA		

Delivered Lumens & Wattage per color temperature:

	2700K	3000K	3500K	4000K	WATTS
SLS100	70 lm	75 lm	90 lm	100 lm	3W

*Estimated lumens. For higher lumen packages, please consult the Lumux sales team.

Housing: The SLS100 Series feature a powder coated faceplate enclosing diffuser mounted to a diecast low-copper aluminum housing with vandal-resistant stainless steel screws.

Lens: Sealed one-piece shatter-proof frosted glass diffuser.

Gasket: Closed-cell silicone foam gasket that seals out moisture, dust, and insects, for weather tight operation.

Mounting: Surface-mounted with mounting bracket to standard 3" and 4" junction box.

Installation: Please refer to installation instructions.

Finish: Zinc-polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Light Engine: Standard constant current non-dimming driver powering high quality LEDs. 0-10v dimming driver optional.

Content of specification sheet subject to change

LUMUX

STEP LIGHT

SLS SERIES COLLECTION



SLS100



SLS250



SLS1000



SLS130



SLS650



SLS1400



SLS150



SLS750



SLS1500



SLS350



SLS755