LUMUX

DATE:
PROJECT:
FIRM:
CATALOG NO.:
COMMENTS:

UP DOWNS

UD700

The Lumux UD1000 is a precision engineered architectural LED wall mounted cylinder offering direct and indirect light from a single cylinder in diecast aluminum with no visible hardware in a sleek, symmetrical design. Multiple lighting configurations can be specified – up or down only, or up & down – making it a versatile product for a wide range of applications. The fixture is constructed with the highest quality of specification grade materials and component parts, while a shielded light source enhances visual comfort.

Housing: Heavy-duty construction of one-piece, corrosion resistant, low-copper (<1% copper) die-cast aluminum.

Lens: 1/8" think shatter proof clear glass diffuser

Mounting: Surface mounted **Installation:** Mounting footplate

Finish: Zinc polyester powder coat finish in black, white, silver,

bronze, or any custom RAL color.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 11W

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens: 2700K 3000K 3500K 4000K

540Lm 600Lm 700Lm 800Lm The delivered lumens represented above

are figures for each side

CRI: 90

Warranty: 5 year limited warranty




















Dimensions:

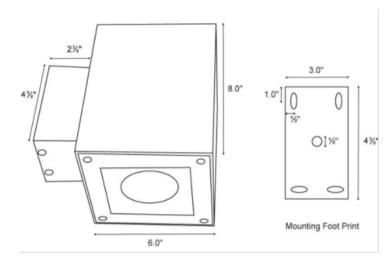



DATE:	
PROJECT:	
FIRM:	
CATALOG NO.:	
COMMENTS:	

UP DOWNS


UD700

Ordering Guide:

Catalog No.	LED Color	Color Temp ¹	Voltage	Finish	Options ²
UD700	White	2700K	120/277		☐ Dimmable driver (0-10v)
		3000K		Black	Up only
		3500K		White	Down only ³
		4000K		Silver	Up & Down
				Bronze	i i
				Custom RAL ²	

Catalog No.:



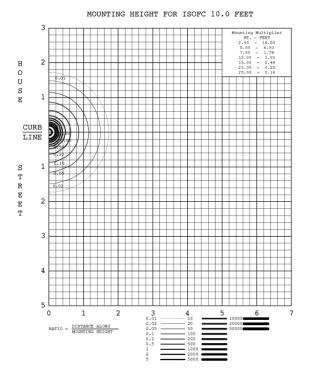

¹Consult factory for additional options

²Consult factory for pricing

³Dark sky compliant