



AdaptaBeacon® Rotating Lights

Weatherproof

52 Series

FEATURES

- > Weatherproof
- > Light intensifying reflector
- > 75 revolutions per minute
- > Bayonet lamp socket for easy replacement
- > Cast base can be utilized as junction box
- > May be mounted vertically, facing up or down in 3 ways:
 - Direct Surface
 - 4" (102mm) octagon box
 - 1/2" (13mm) NPT conduit

Rotating signal designed to provide maximum brilliance and long term durability with minimum maintenance. The polycarbonate dome allows for easy cleaning. May be mounted in any orientation.

For direct mounting applications, unit is supplied complete with gasket and rubber expansion plugs. For weatherproof installation unit must be mounted vertically with the dome facing up. May be corner mounted using the Cat. No. CBR, corner mount bracket, or wall mounted using the Cat. No. WBR, wall mount bracket. See AdaptaBeacon Accessories, page 3-118.


Designed to attract attention or indicate equipment malfunctions in noisy areas. Used in security systems to visually show indication of an intrusion. Also used in factory and distribution facilities to alert workers of oncoming fork truck traffic.

AGENCY APPROVALS

- > UL 1638 Listed
- > cUL Listed



TECHNICAL INFORMATION

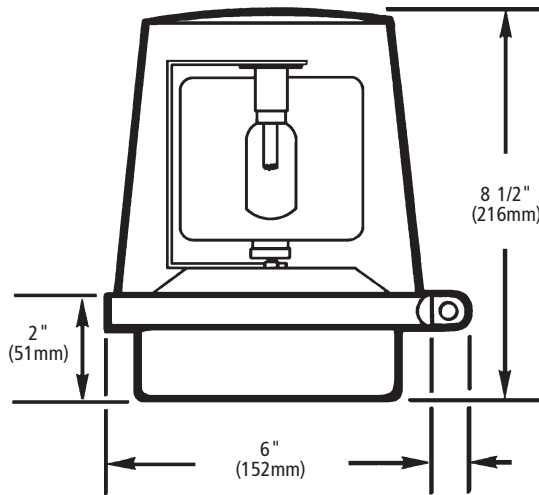

| Cat. No. | Lens Color | Replacement Lens Cat. No. | Lamp Ratings | Revolution Rate | Electrical Ratings | Replacement Lamp Cat. No. |
|-------------|------------|---------------------------|------------------|-----------------|----------------------------|--|
| 52C-N5-40WH | Clear | 52-LC | 40 Watts | 75 rpm | 120V 50/60 Hz 0.35 Amps | 50-LMP-40WH |
| 52R-N5-40WH | Red | 52-LR | 265 lumens* | | | |
| 52A-N5-40WH | Amber | 52-LA | 3328 candlepower | | | |
| 52B-N5-40WH | Blue | 52-LB | 25,000 hours** | | | |
| 52G-N5-40WH | Green | 52-LG | | | | |
| 52M-N5-40WH | Magenta | 52-LM | | | | |
| 52C-G5-20WH | Clear | 52-LC | 20 Watts | 75 rpm | 24V 50/60 Hz 0.8 Amps | 50-LMP-20WH |
| 52R-G5-20WH | Red | 52-LR | 226 lumens* | | | |
| 52A-G5-20WH | Amber | 52-LA | 2839 candlepower | | | |
| 52B-G5-20WH | Blue | 52-LB | 25,000 hours** | | | |
| 52G-G5-20WH | Green | 52-LG | | | | |
| 52M-G5-20WH | Magenta | 52-LM | | | | |
| 52C-R5 | Clear | 52-LC | 25 Watts | 75 rpm | 240V 50/60 Hz 0.10 Amps | P-041917-0039 Industry Trade No. 25T8/240V/DC/CL |
| 52R-R5 | Red | 52-LR | 232 lumens* | | | |
| 52A-R5 | Amber | 52-LA | 2914 candlepower | | | |
| 52B-R5 | Blue | 52-LB | 120 hours** | | | |
| 52G-R5 | Green | 52-LG | | | | |
| 52M-R5 | Magenta | 52-LM | | | | |

*Manufacturer's lumen rating.

**Projected lamp life based on manufacturer's calculated lamp life @ 65 FPM and 50% duty cycle.



Power Door Products

(914) 698-5083

www.PowerDoorProducts.com