

# 981/718/987 GT4 WING INSTRUCTIONS

## **NR AUTOMOBILE RECOMMENDS INSTALLATION BY A QUALIFIED BODY SHOP**


Picture shows placement of risers in relation to the rear hatch cover

NR GT4 Wing is shipped with risers attached to the pitch plates

### **ATTENTION 987 Cayman**

For 987 models, place the wing with risers attached so the back end of the risers is 2" from the end of the hatch cover. Center the risers so they are equal distance from the left and right end of the hatch cover. The riser base will be closer toward the center of the wing blade than they are on a 981.

- Place the wing with the risers installed on the rear hatch using the measurements shown in the picture
- Lift or remove rubber riser cover so the 8 holes are exposed
- Mark holes using the riser base as a template
- Remove wing blade from risers
- Line up riser base and use as a template to make sure holes to be drilled line up with the holes marked
- Drill holes and place a rivet in each hole drilled to keep risers from moving but do not compress rivets at this stage
- Paint wing blade
- Install wing blade to risers and use rivet tool to clamp all 8 aluminum rivets
- Rubber cover should close any gap between the riser base and hatch cover
- You may want to use adhesive on the underside of the riser cover to keep a tight fit to the riser base

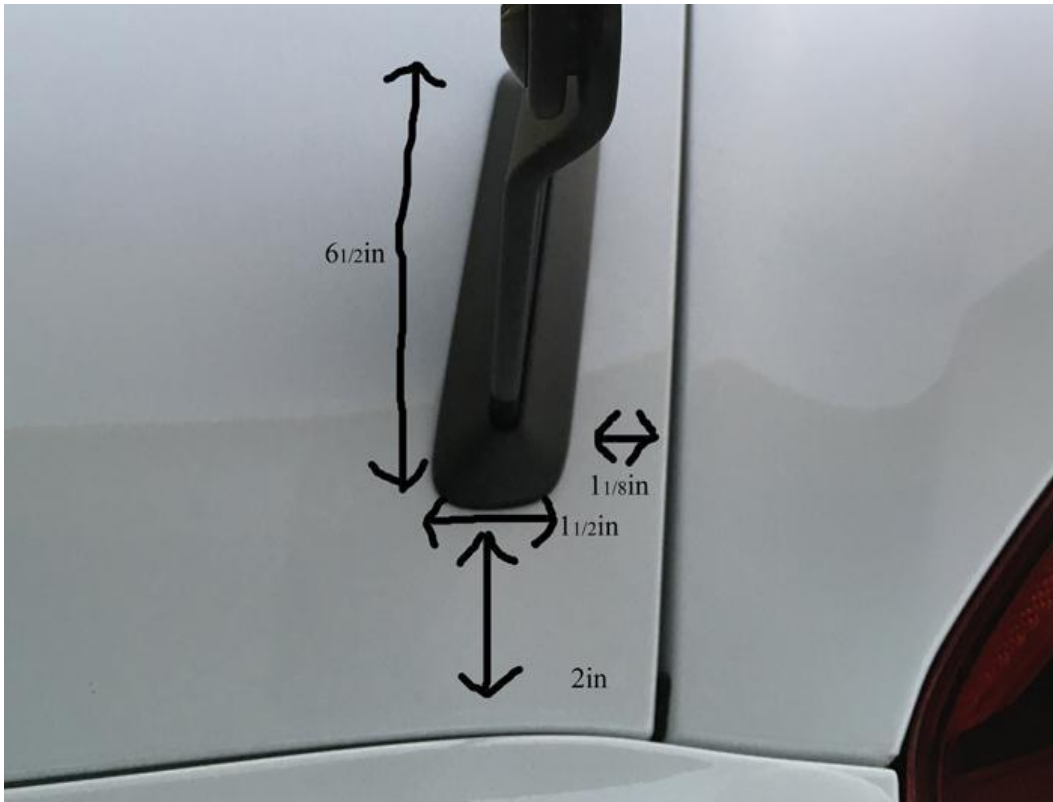

- Note - The area between the upright and trunk edge may measure 3 and 1/4" instead of 1 and 1/8". These measurements will provide a general idea of where to mount and do not need to be taken as exact.



NR AUTO