

#99102-RD

991 REAR DIFFUSER INSTALLATION

1. We recommend you remove the rear bumper to install our Vsport rear diffuser
2. Remove the factory black diffuser from the bumper. Original black screws are re-used to install the Vsport diffuser.
3. Install the finned diffuser into the slotted tab opening in the rear bumper.
4. Install the outside tabs with the diffuser attached to the bumper. Screws will hold the diffuser tight against the bumper toward the ends of the diffuser.
5. Prep and paint diffuser in matte black
6. Install rear diffuser mounting bracket hardware as shown in pictures 1,2 and 3 on the underside of the car by engine.
7. These brackets will attach to hardware installed in the front area of the diffuser.

PREPPING INSTRUCTIONS FOR FRP PARTS

****Fit parts before prep and paint****

Our NR Automobile body parts come with a sealer poly primer. This primer will fill in any small pinholes that may be present. Parts need to be sanded before painting and may require another primer coat before painting. Do not bake parts during the painting process.

NR AUTOMOBILE ACCESSORIES


MOUNTING BRACKET INSTALLATION

#1



Attaching points for rear diffuser brackets

#2

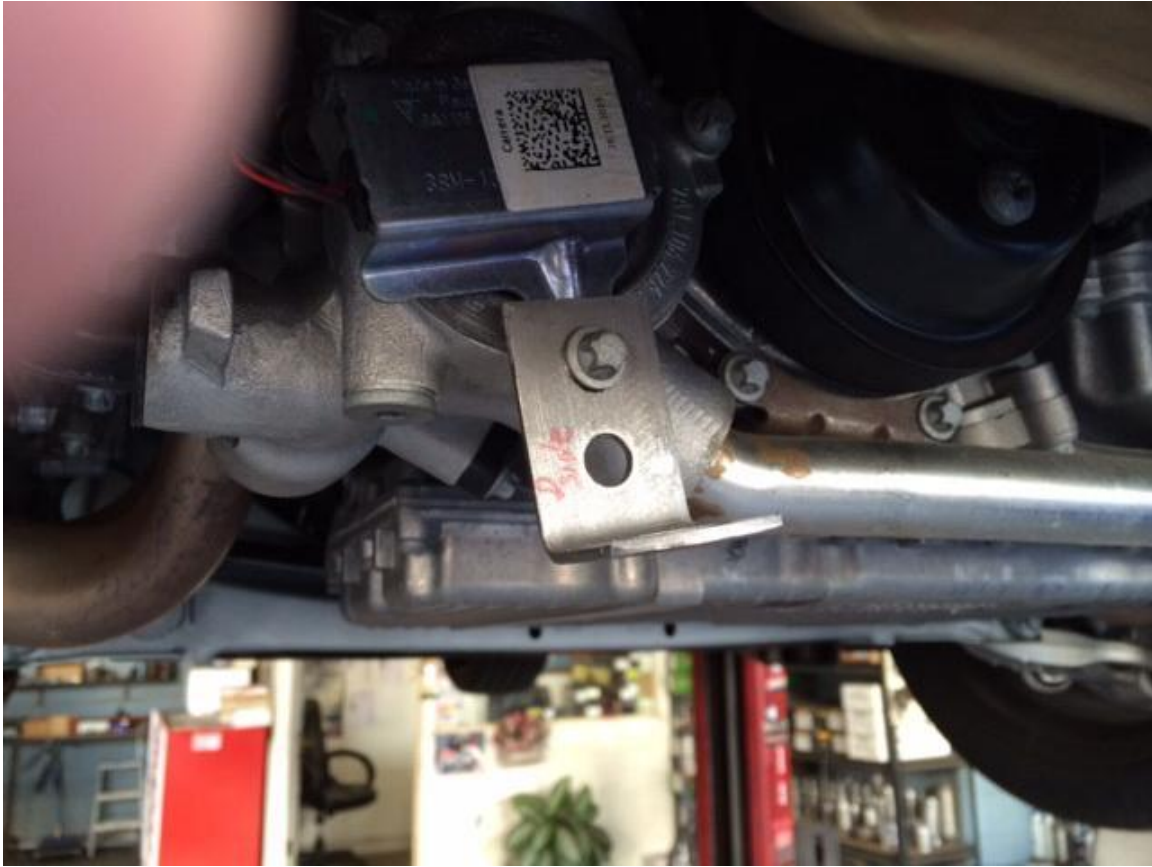

Driver Side

#3



Passenger Side



Finished Installation