

#99674

## 997 STYLE GT REAR BUMPER FOR 996 Installation Instructions

### BUMPER BUFFERS INSTALLATION INSTRUCTIONS




It will be necessary to slot and cut opening in license area to install bumper buffers. We recommend using a small amount of adhesive in the slotted part of the bumper.

If your original bumper has bumper buffers and you don't want them in your new NR bumper, you will need to remove bumper buffer support from the bumper reinforcement.



Rear panel can be raised or lowered by loosening speed nuts. Holes in panel can be enlarged to allow for more adjustment. Bumper will be raised or lowered by moving the panel up or down.

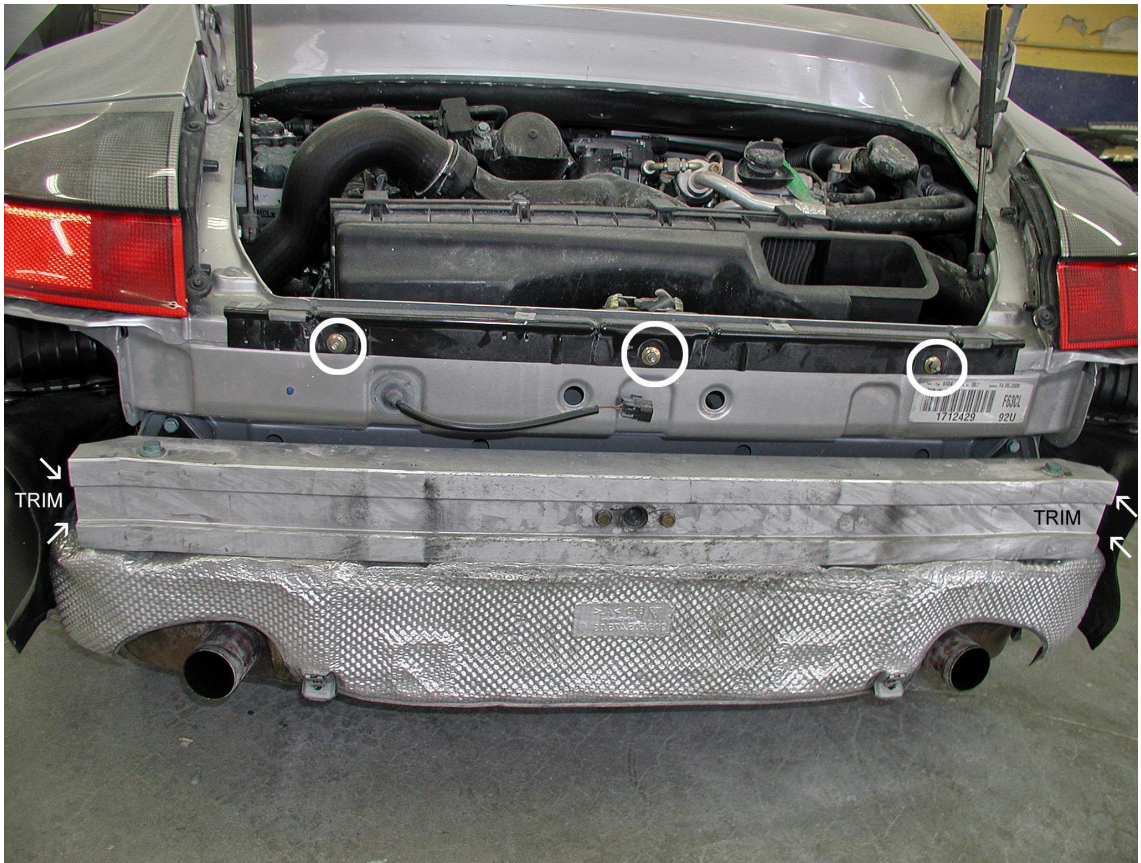

Rear panel above reinforcement can be adjusted up or down when fitting GT Rear Bumper. Ends of reinforcement need to be trimmed to clear Turbo intercooler covers. Exhaust muffler outlet pipes need to be moved so they line up in center of exhaust outlets in the diffuser.



**996 and 997**

**REAR BUMPER INSTALLATION INSTRUCTIONS**

**NR Bumper is installed with original Porsche mounting hardware**



**BEFORE**

- **Remove Mounting Plate**



**PREPPING INSTRUCTIONS FOR  
FRP PARTS**

**\*\*Fit parts before prep and paint\*\***

Our NR Automobile body parts come with a sealer poly primer. This primer will fill in any small pinholes that may be present. Parts need to be sanded before painting and may require another primer coat before painting. Do not bake parts during the painting process.

**NR AUTO**