


Installing Your Wi-Fi Receiver and 20 Function Remote.

Elite Models that Apply: EL04-EL05-LE, Phenom1&2.			
Step	Description	Tools	Picture
1	Unscrew the (4) screws that attach the control panel to the red case.	Phillips Screw Driver	 <p>Control Panel - Open</p>
2	<p>Take the plastic cover off of the Velcro, and stick it on the Left side of the case. (With the wires pointing toward the control panel).</p> <p>For Phenoms please install on the right portion of the top unit. (<i>make sure you wipe the area you are about the apply the receiver on with a dry cloth or tissue</i>).</p>		 <p>Stick Remote Receiver on Ball Guide side.</p>
3	<p>Connect the red and white wire (coupling) with the white female 4-pronged housing, into the Remote 4-pronged male connector jack.</p> <p><i>(If you are installing the Wi-Fi receiver ONLY, then continue to step 5).</i></p>		 <p>Remote</p> <p>4 pronged Remote connector jack.</p>

Installing Your Wi-Fi Receiver and 20 Function Remote.



Wi-Fi red and white wire couple plugged into Remote connector jack.

Installing The Wi-Fi Receiver And The 20 Function Remote Receiver Into The Same Machine.


Plug the Female 4-pronged Y-pig-tail into the 4-pronged male remote connector jack.

4


Plug the Wi-Fi red and white wire (coupling) with the female 4-pronged housing, into one of (it does not matter which one) the 4-pronged male connector jacks on the Y-pig-tail.

Connect the female 4-pronged multi color wiring of the 20 function remote receiver, into the left over 4-pronged male Y-pig-tail connector jack.


Continue on to Step 5.

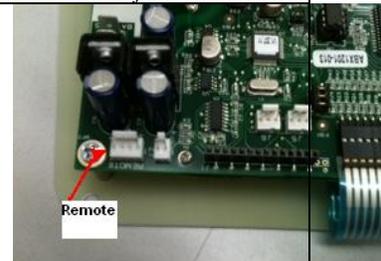

4 pronged Remote connector jack.

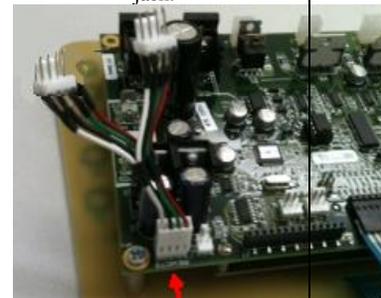


Y-Pig-Tail attached to 4-prong Remote connector jack.

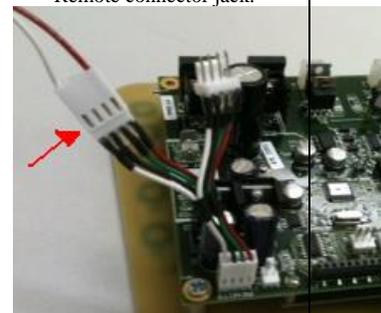


Red and white Wi-Fi female plugged into Y-Pig-Tail.


Installing Your Wi-Fi Receiver and 20 Function Remote.

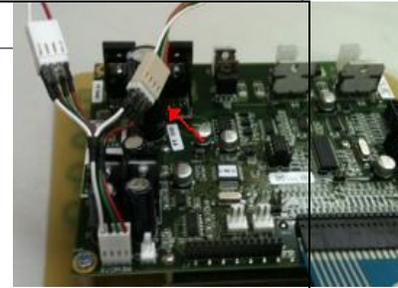


20 function remote receiver plugged into Y-Pig-Tail

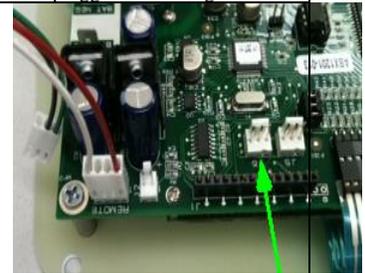

J6 3-pronged connector jack.

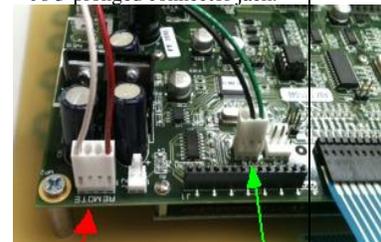

Wi-Fi green and white wire couple plugged into J6 connector jack.

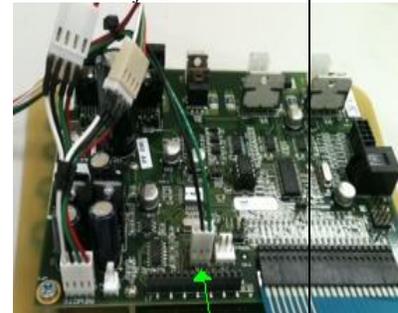

Green and white wire couple plugged into J6 connector jack, with additional Y-Pig-Tail housing both red and white Wi-Fi receiver and 20 function remote receiver.

5

Plug the green and black wire (coupling) with the white female 3-pronged housing, into the J6 3-pronged male connector jack.



Installing Your Wi-Fi Receiver and 20 Function Remote.

<p>6</p>	<p>Screw the control board back onto the case, and follow the i-phone testing instructions below.</p>	<p>Philips Screw Driver</p>	
<p>7</p>	<p>Please follow the instructions below to Test the Wi-Fi.</p> <p>Note: Make sure your Control Panel has Software version: 1.207.11, 1.214.11, or 1.218.34.</p> <p>Go to settings and click on "Wi-Fi" connections. Your device will detect the network called "LobsterSports-xx". Select this network. Note: xx is a number unique to your machine. For this network, press the > to adjust its settings: a) Make sure your device is set up to detect "LobsterSports-xx" automatically by setting your 'AutoJoin' button to ON.</p> <p>Click on your Lobster Remote icon on your iPhone/iPad device. Please allow anywhere from 30 seconds to 1 full minute for your machine and phone to properly acknowledge each other! Your Lobster app will tell you when you are ready to go.</p>		