


CF-3753 7 DEGREE SMITH

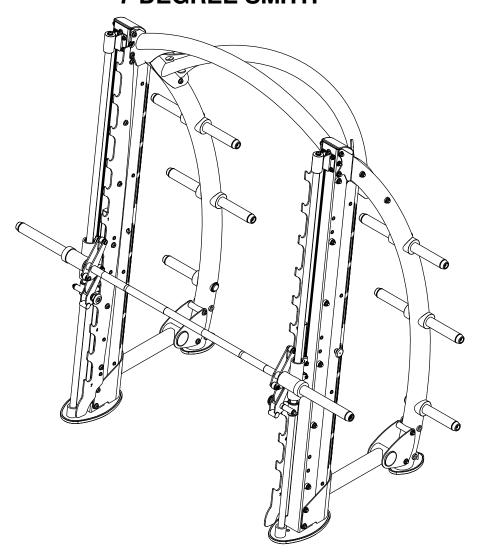

WARNING!

TO PREVENT POSSIBLE TIPPING, BOLT THIS UNIT TO THE EXERCISE FLOOR USING MINIMUM 4 - 1/2" LONG BOLTS. FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY OR DEATH.

Note: Both Serial Number and Model Number are Required when Ordering Parts RECORD SERIAL NUMBER HERE <u>Customer Service</u>

(800) 548-5438

(858) 578-7676

Fax

(858) 578-9558

A09

MACHINE CODE



CONTENTS

INSTRUCTIONS)2
FRAME ASSEMBLY)4
PRE-ASSEMBLY2	23
DECAL PLACEMENT2	27
DECAL REFERENCE2	28
PART LIST 2	<u> 2</u> 9
ABBREVIATIONS 3	32
BOLT SIZING CHART 3	33
WASHER SIZING CHART3	34
MAINTENANCE SCHEDULE 3	36
GENERAL MAINTENANCE INFORMATION	37
WEIGHT TRAINING TIPS 3	38
WEIGHT RATIOS 3	39
EXERCISE LOG4	1 0
LIMITED WARRANTY 4	11

INSTRUCTIONS

Before beginning assembly please take the time to read instructions thoroughly. Please use the various lists in this manual to make sure that all parts have been included in your shipment. When ordering, use part number and description from the lists. Use only HOIST replacement parts when servicing. Failure to do so will void your warranty and could result in personal injury.

HOIST equipment is designed to provide the smoothest, most effective exercise motion possible. After assembly, you should check all functions to ensure correct operation. If you experience problems, first recheck the assembly instructions to locate any possible errors made during assembly. If you are unable to correct the problem, call your authorized HOIST dealer. Be sure to have your serial number and this manual when calling. When all parts have been accounted for, continue on.

TOOLS REQUIRED

Ratchet Wrench

1/2", 9/16" and 3/4" Sockets

Adjustable Wrench

Rubber Mallet

Tape Measure


Level


Hex Key Wrench Set


2 People Required For Assembly


THIS PAGE WAS INTENTIONALLY LEFT BLANK


PAGE 03 CF-3753 ASSEMBLY

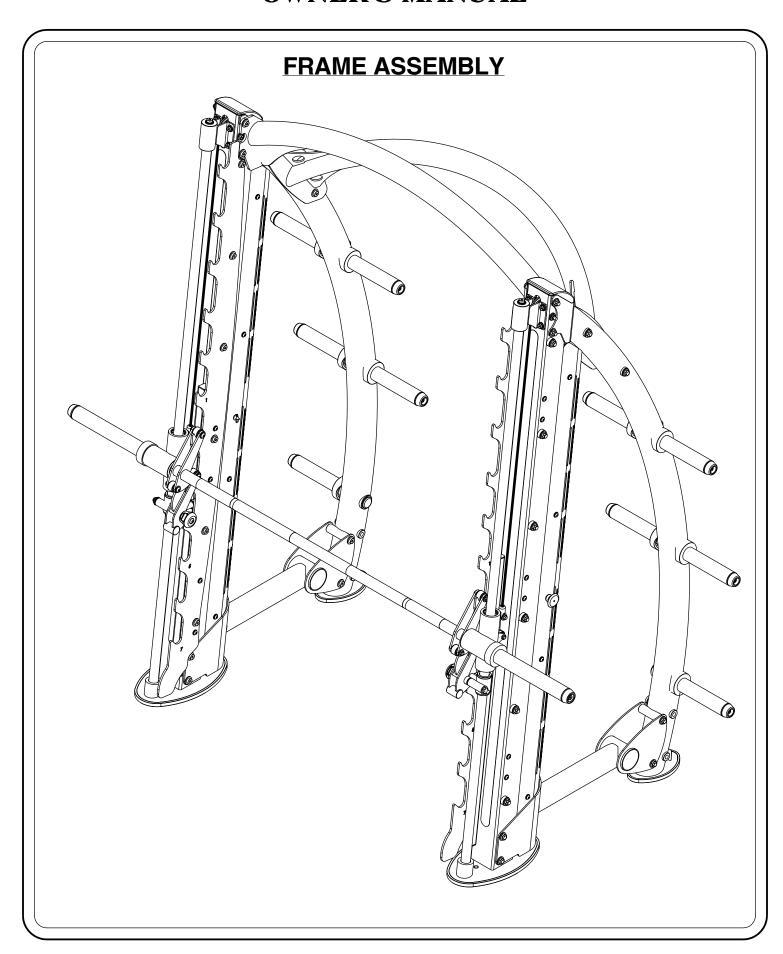


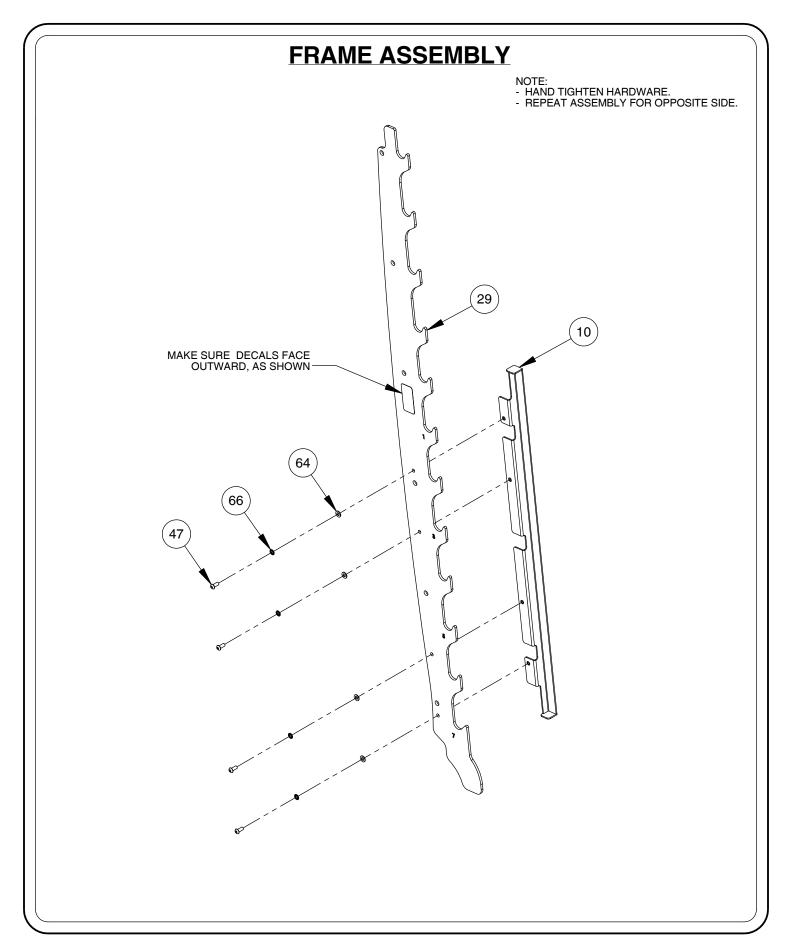

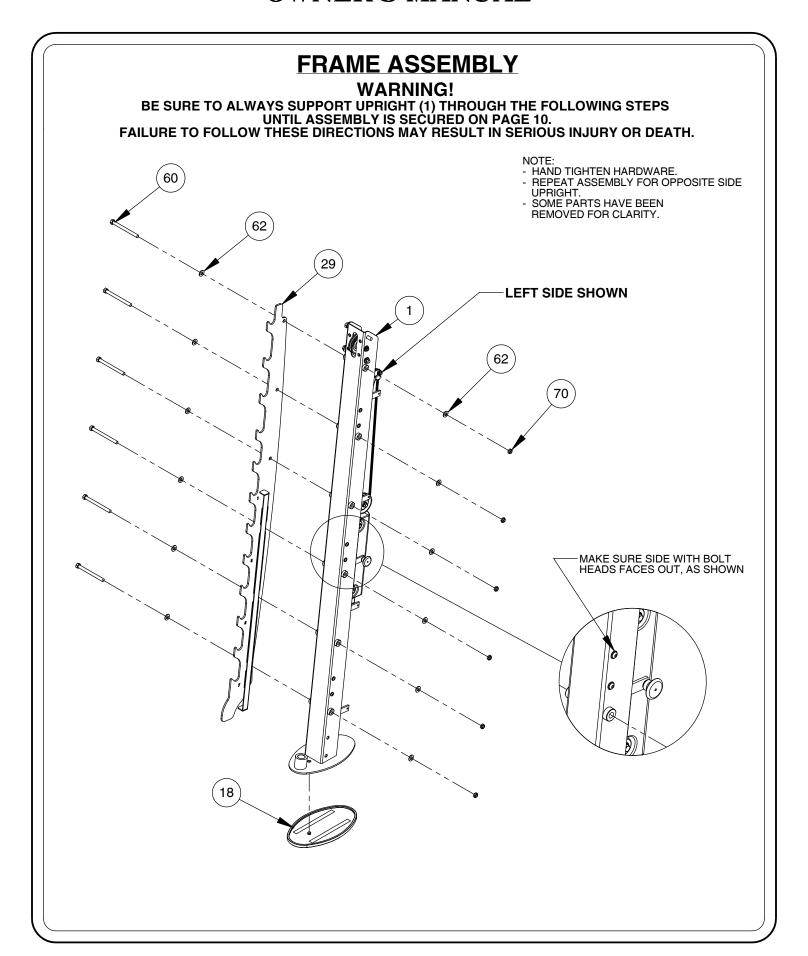

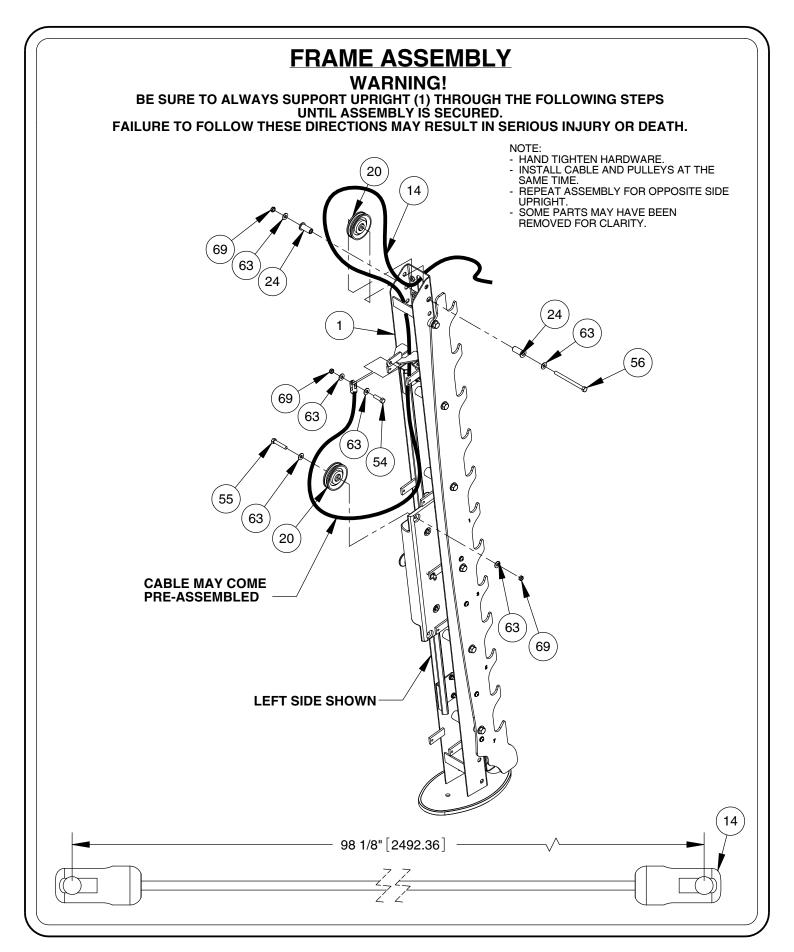

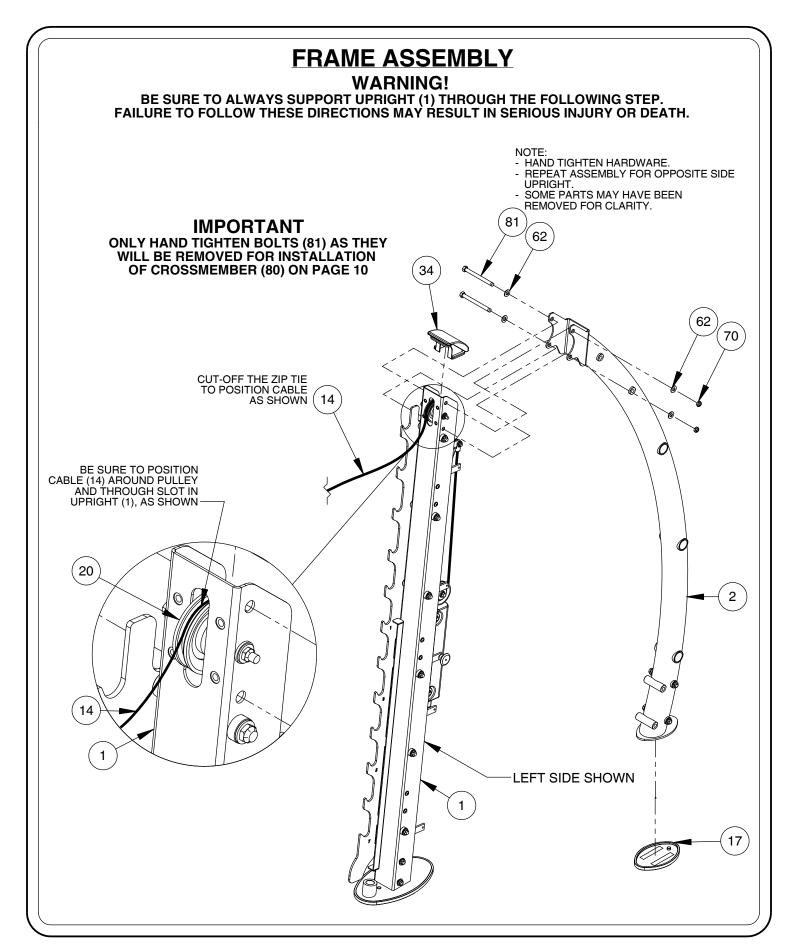

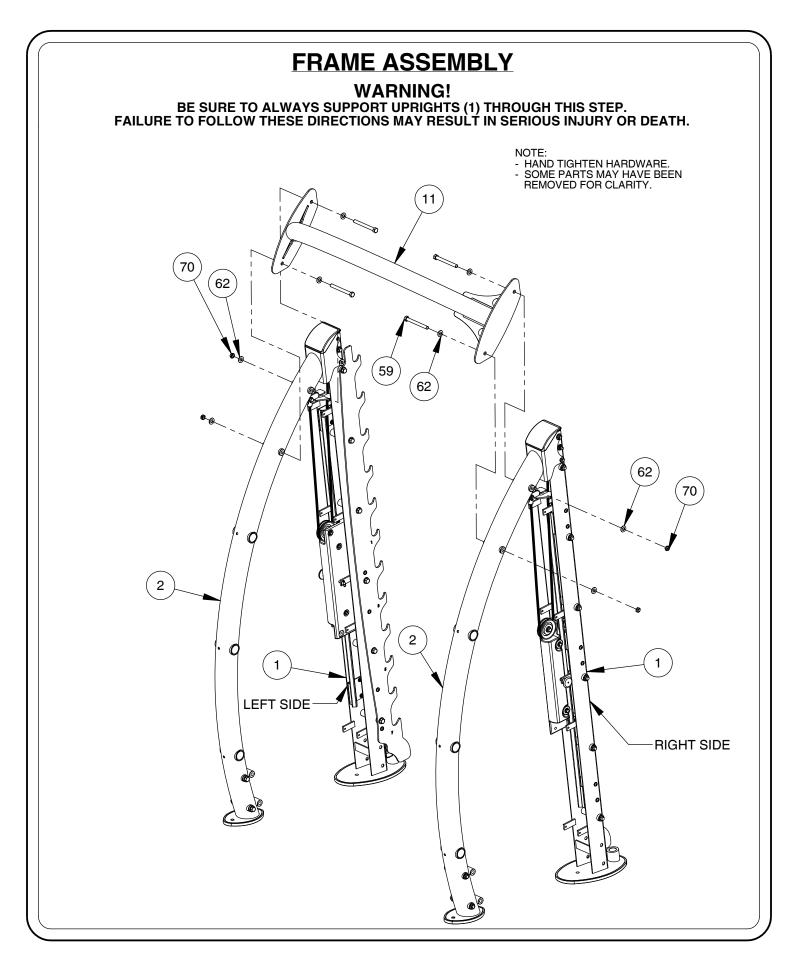

FRAME ASSEMBLY

WARNING!


BE SURE TO ALWAYS SUPPORT UPRIGHTS (1) THROUGH THIS STEP. FAILURE TO FOLLOW THESE DIRECTIONS MAY RESULT IN SERIOUS INJURY OR DEATH.

NOTE:

- HAND TIGHTEN HARDWARE.SOME PARTS MAY HAVE BEEN REMOVED FOR CLARITY.


IMPORTANT


REMOVE BOLTS (81) THAT WERE INSTALLED ON PAGE 8 AND REINSTALL THROUGH CROSSMEMBER (80). ENSURE CROSSMEMBERS AND UPRIGHTS ARE

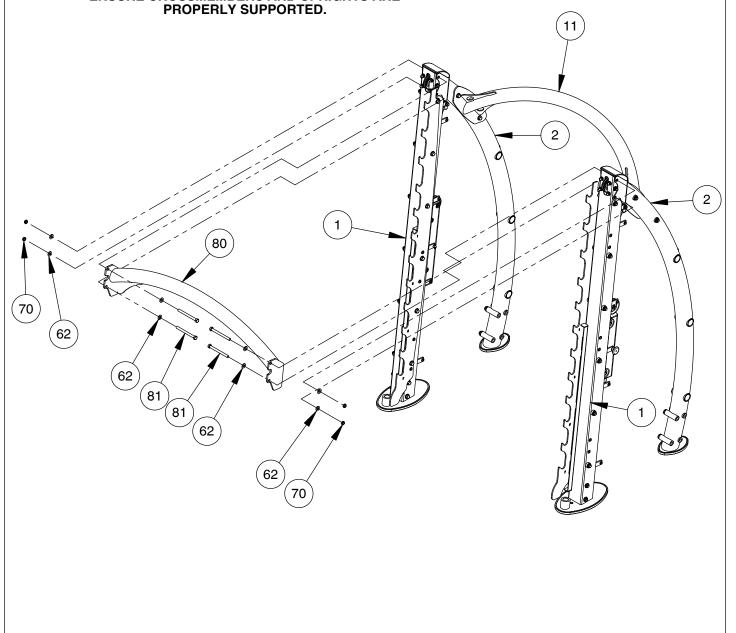



THIS PAGE WAS INTENTIONALLY LEFT BLANK


PAGE 11 CF-3753 ASSEMBLY

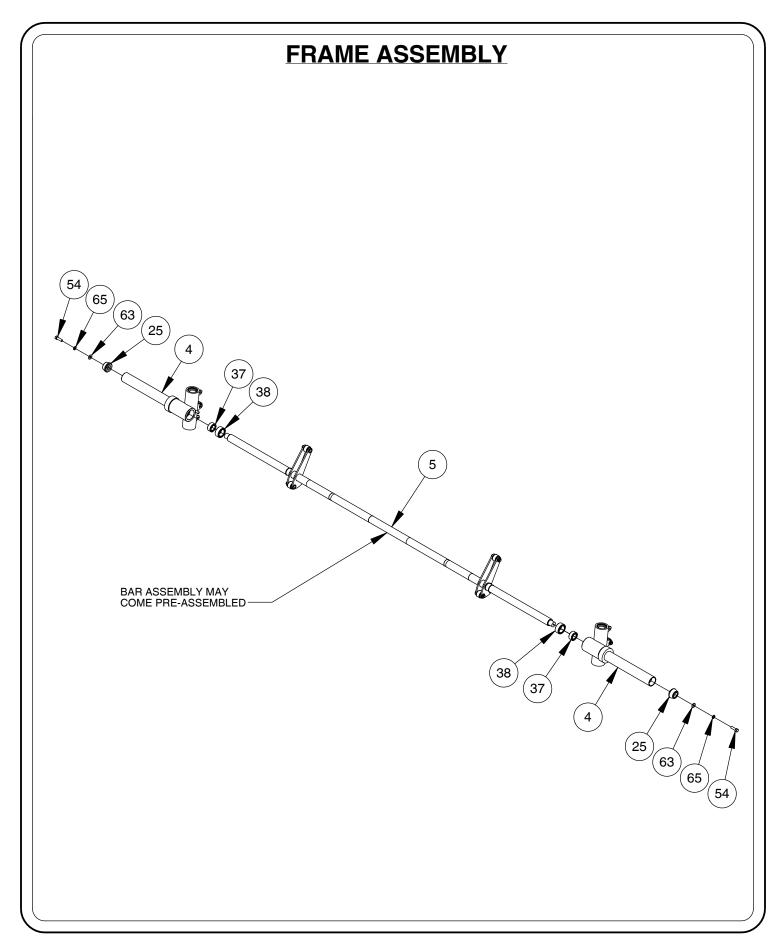


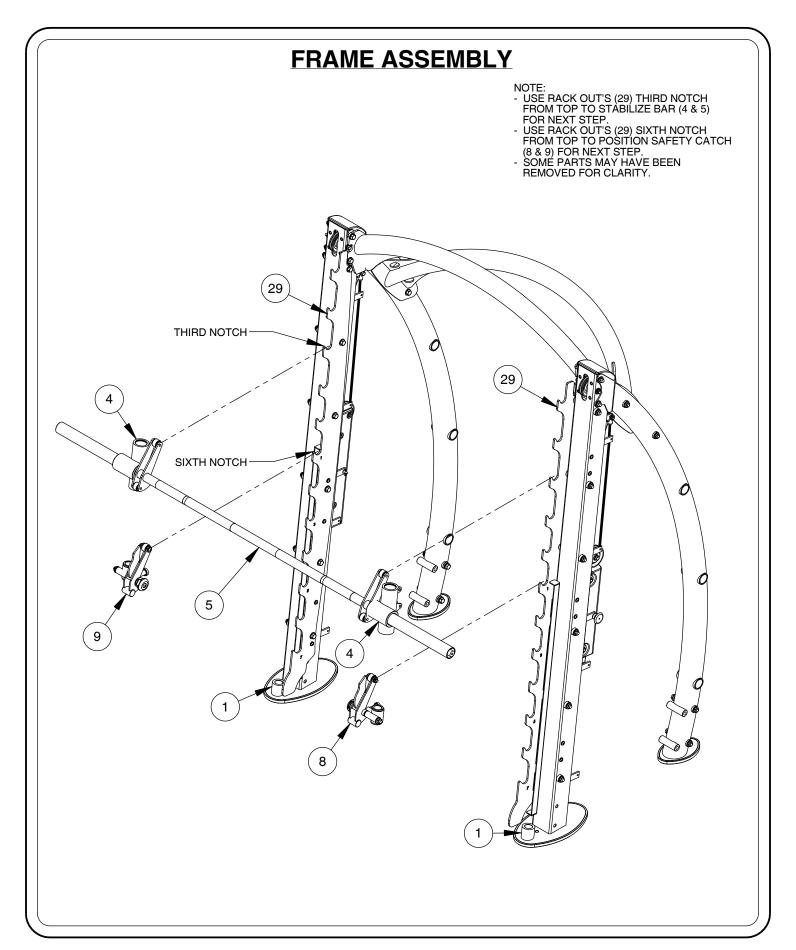


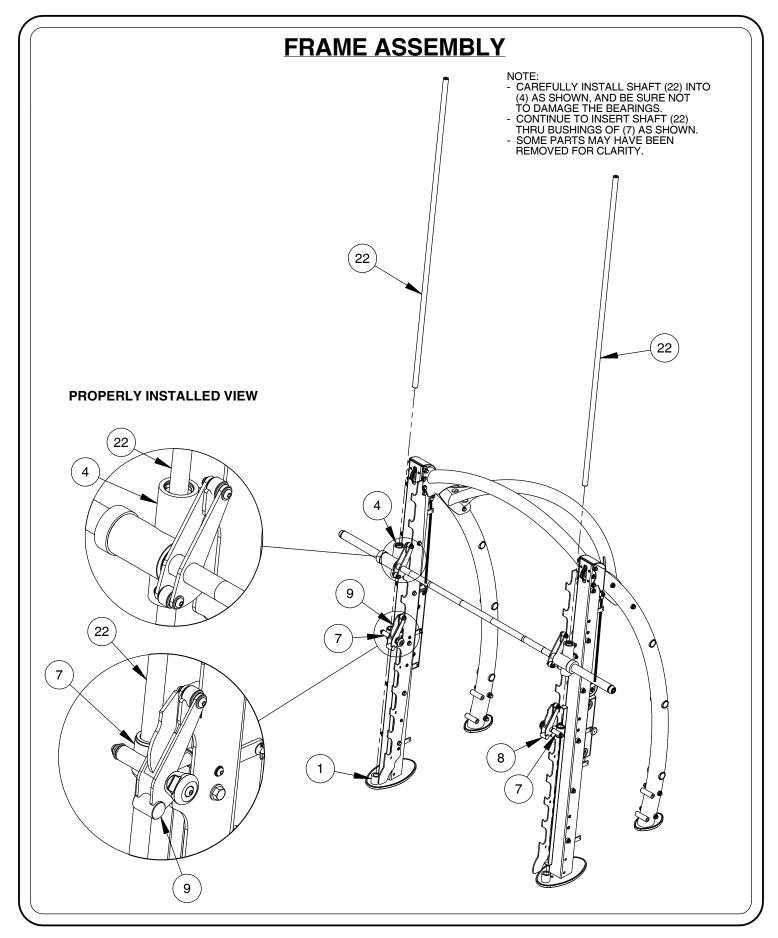

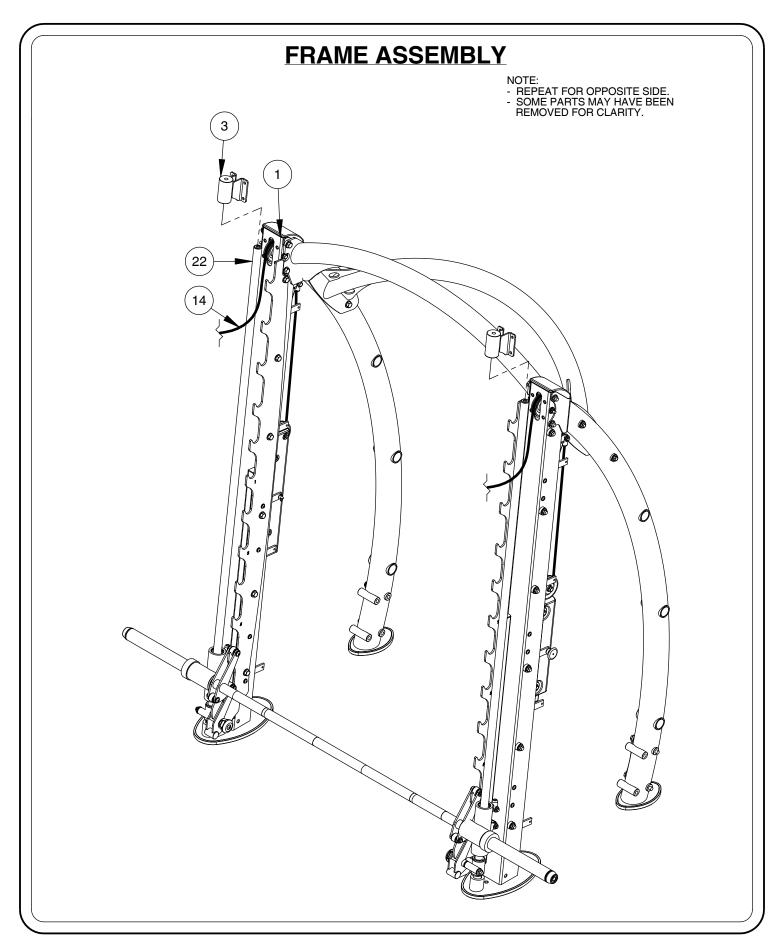

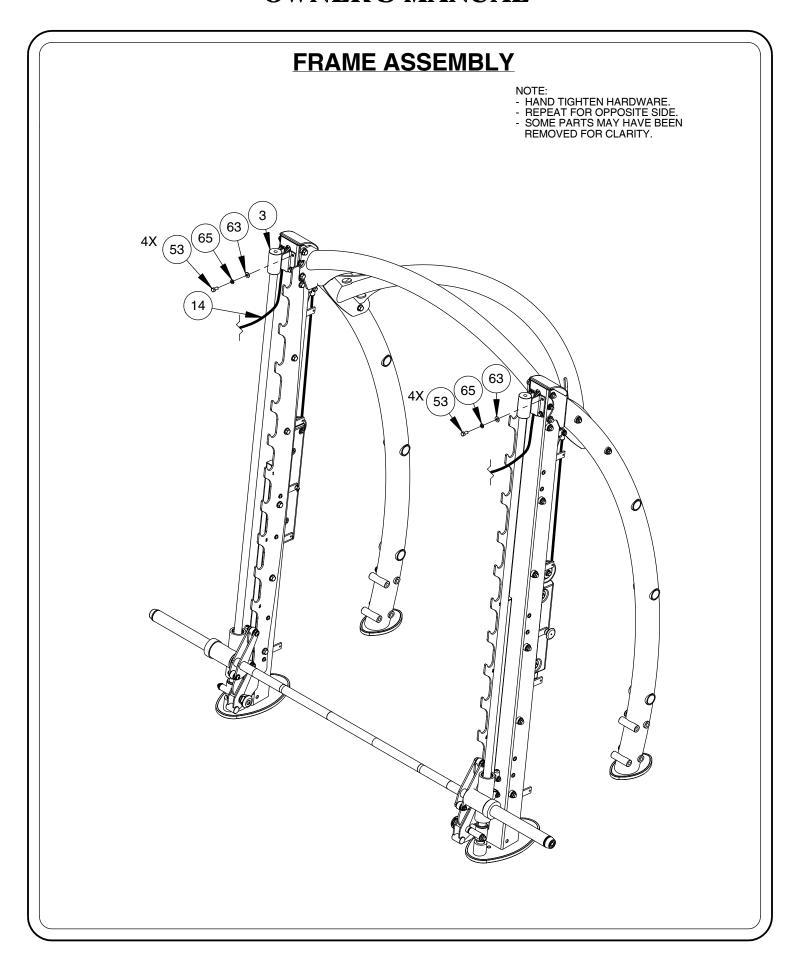

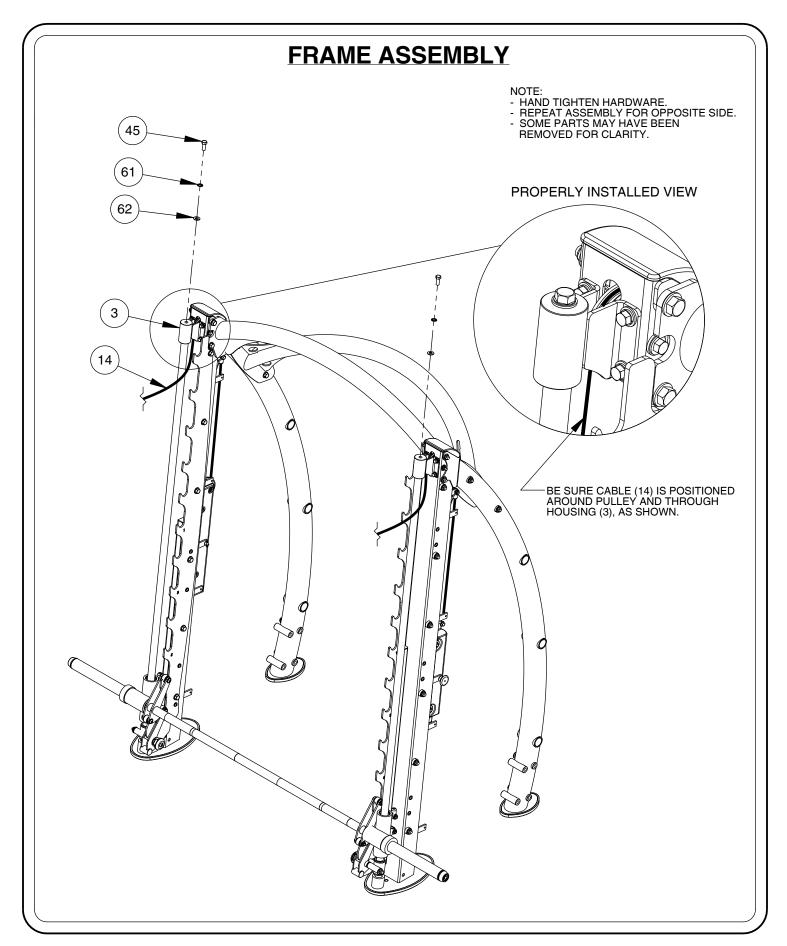


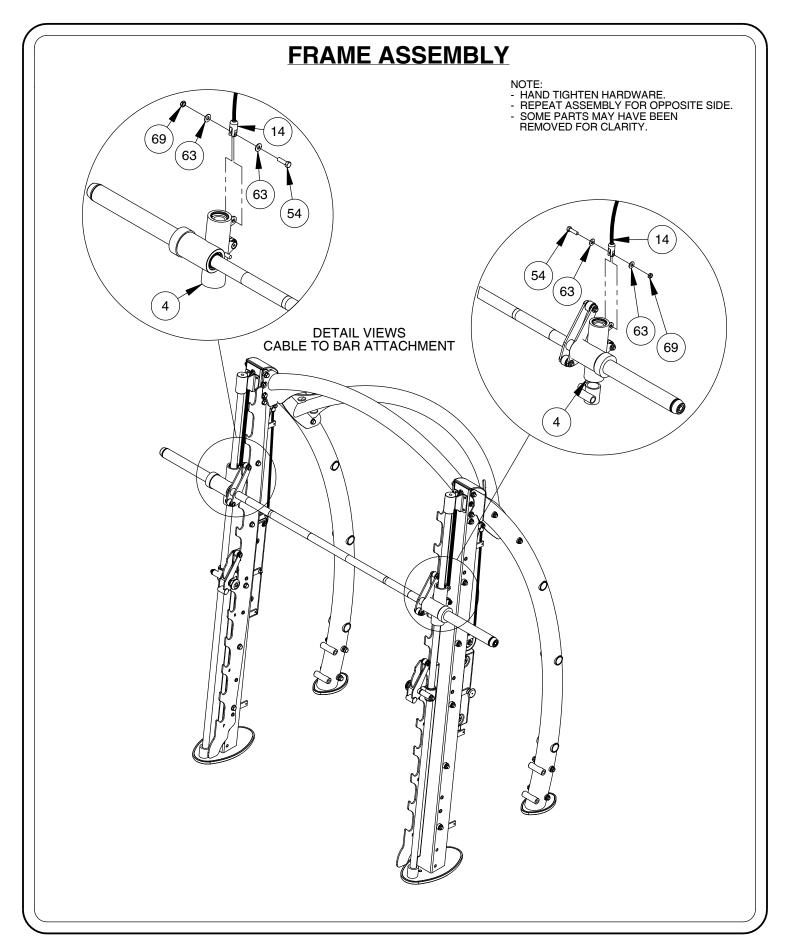



FRAME ASSEMBLY


WARNING!

ONCE HARDWARE IS REMOVED, COUNTERWEIGHT IS FREE TO FALL.
BE SURE TO FULLY SUPPORT COUNTERWEIGHT BEFORE AND DURING HARDWARE REMOVAL.
ONCE HARDWARE IS REMOVED, SAFELY MOVE COUNTERWEIGHT TO RESTING POSITION AT
BOTTOM OF UPRIGHT.

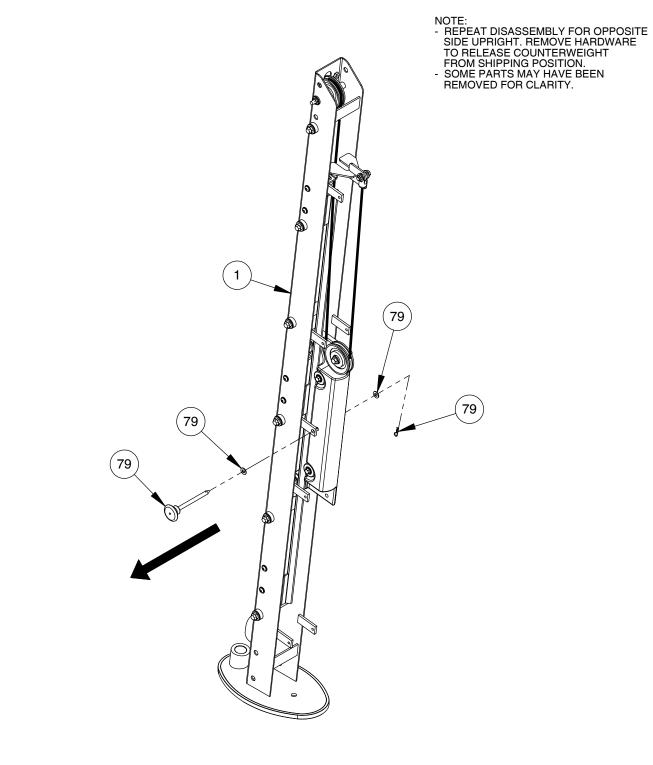


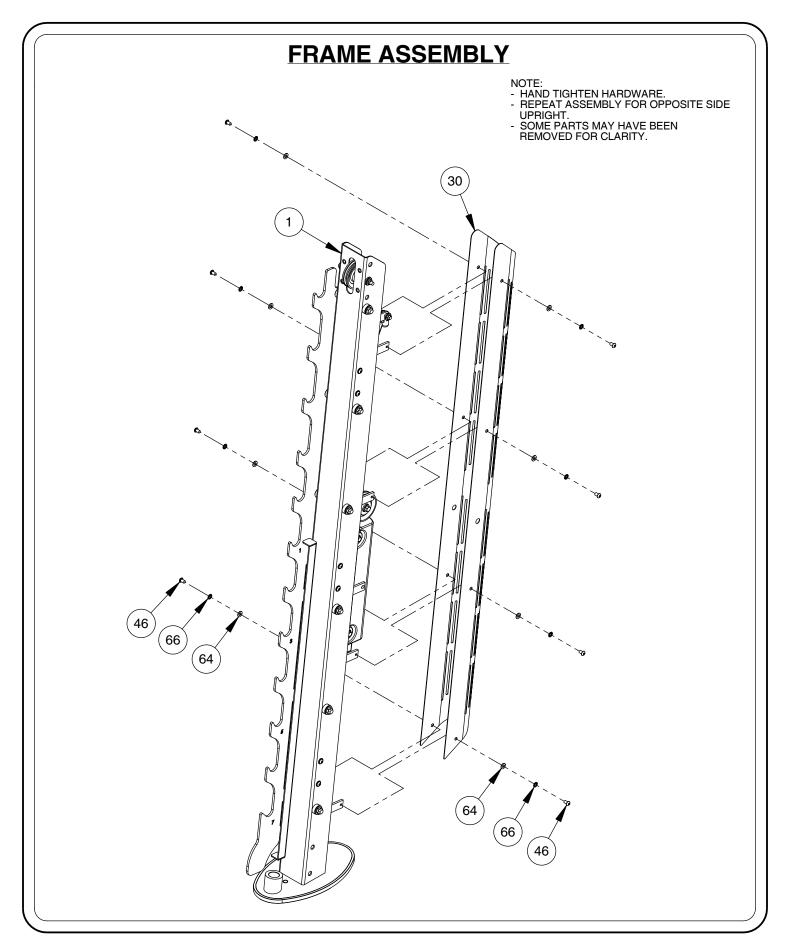


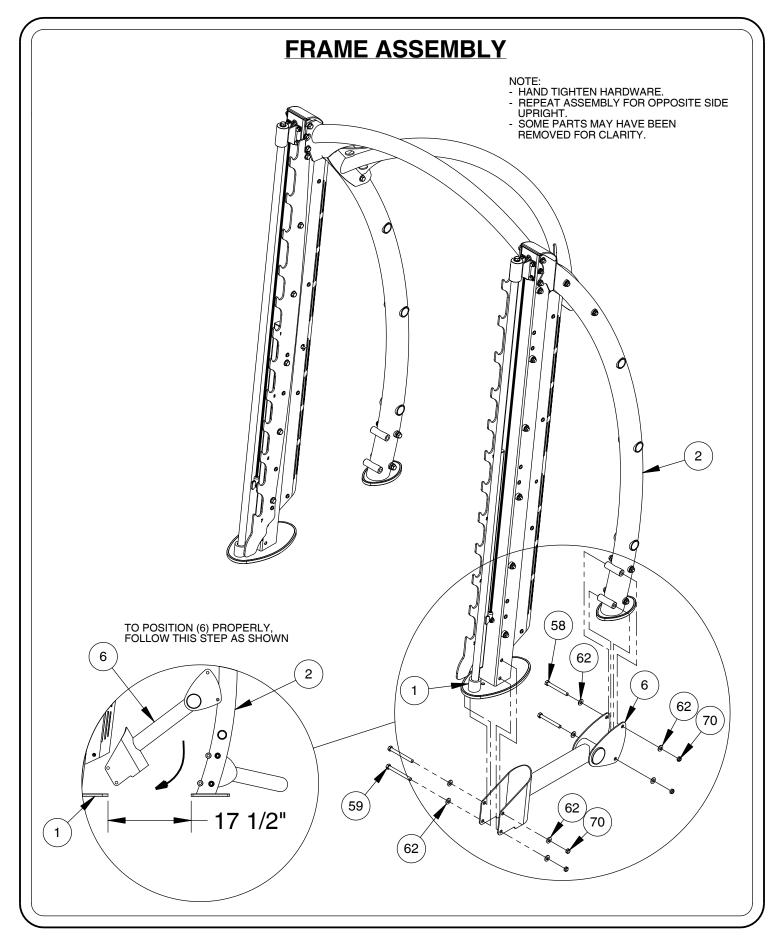

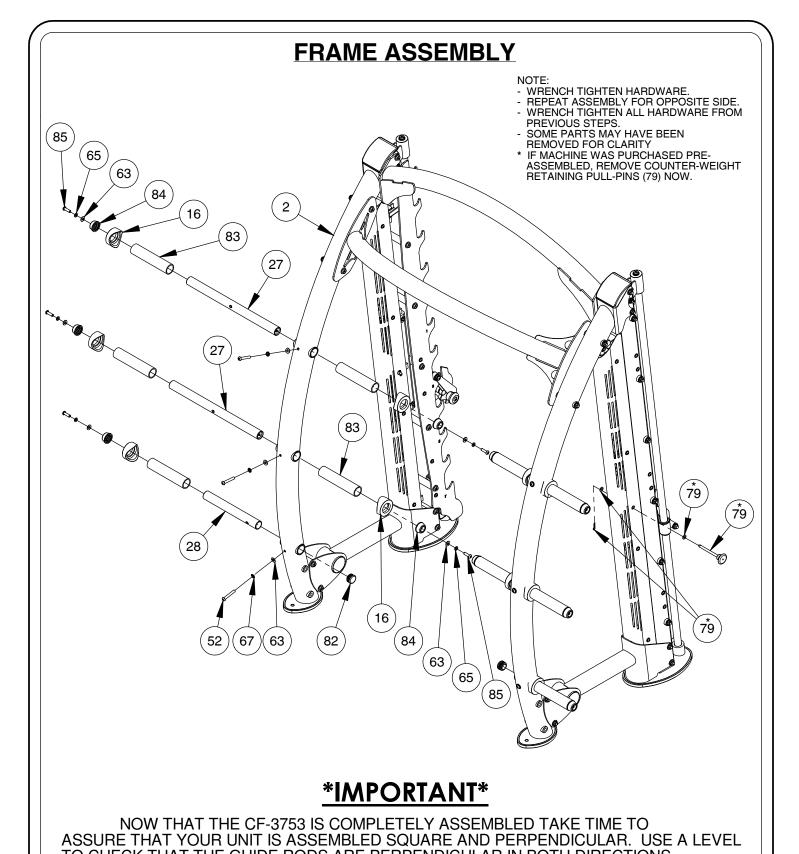


TO CHECK THAT THE GUIDE RODS ARE PERPENDICULAR IN BOTH DIRECTIONS. IF THEY ARE NOT PERPENDICULAR IN BOTH DIRECTIONS, IT WILL BE NECESSARY TO LOOSEN SOME FRAME HARDWARE TO RE-ALIGN THE FRAME AND RETIGHTEN BOLTS.

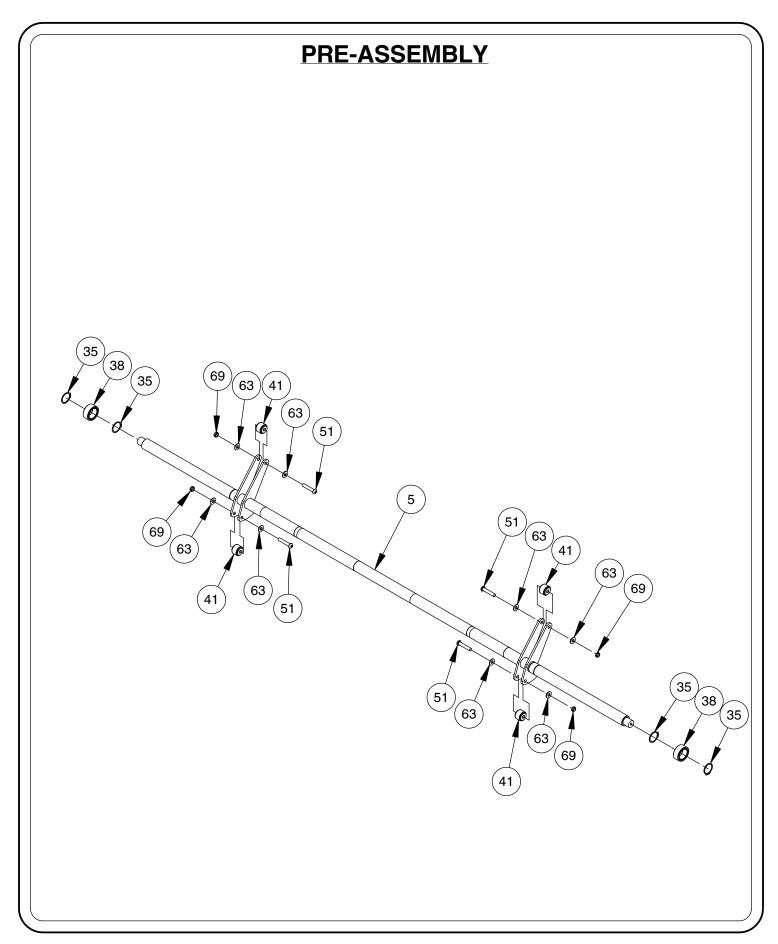


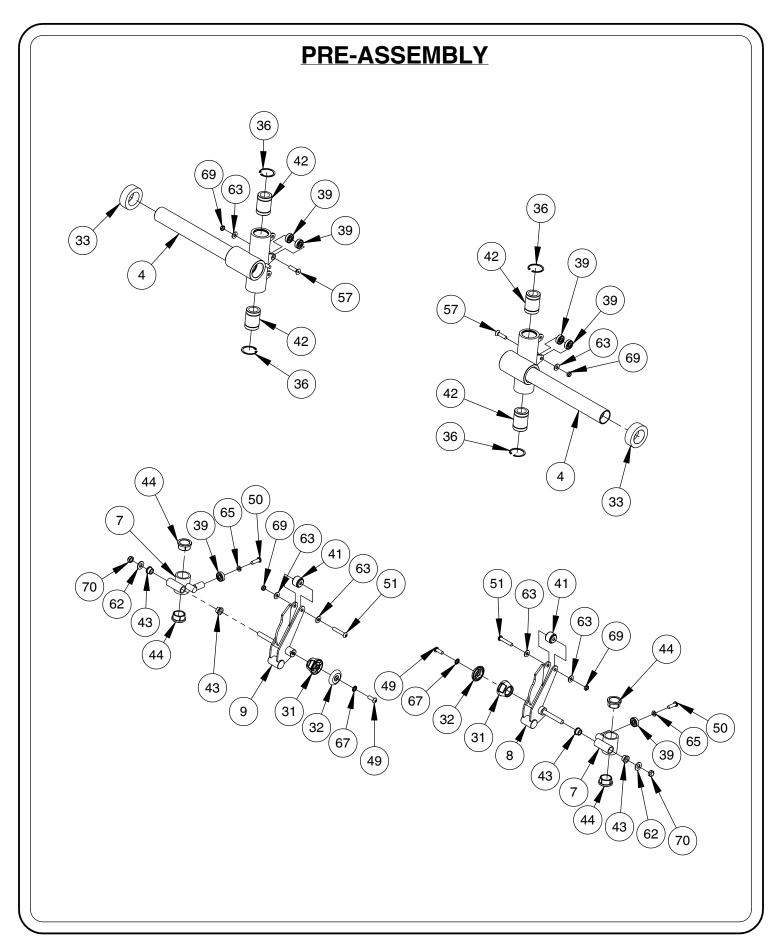

THIS PAGE WAS INTENTIONALLY LEFT BLANK

PAGE 25 CF-3753 ASSEMBLY

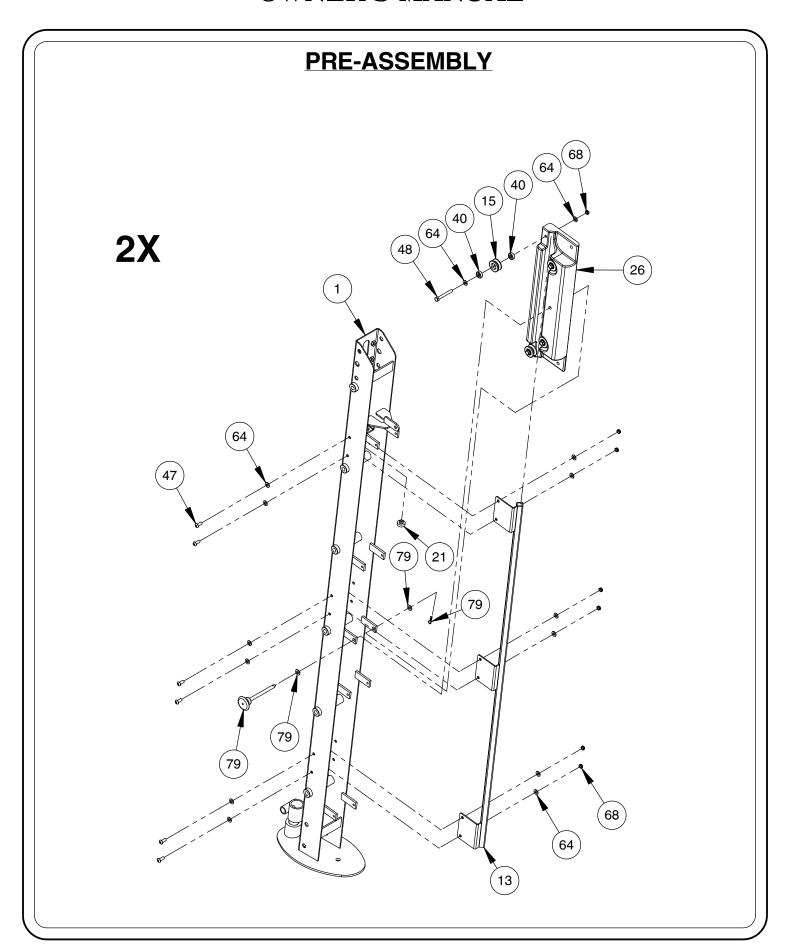

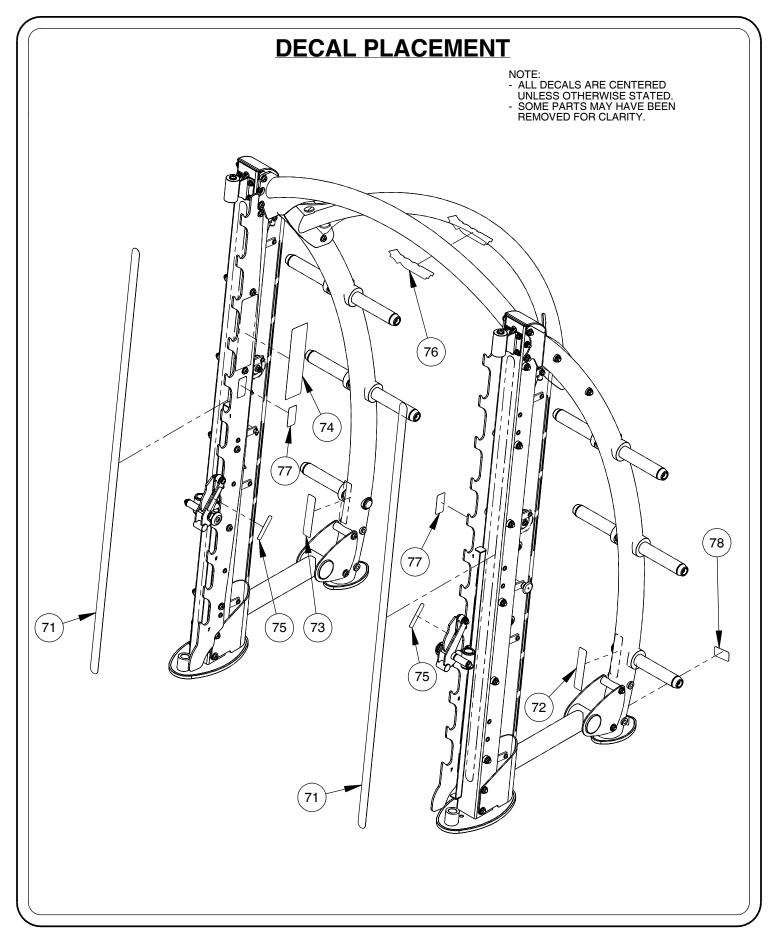

DECAL REFERENCE



AWARNING

ISE OMY GEMINE HOIST REPLACEMENT PARTS, FALLIFE TO DO SO WILL YOID WARBANTY AND COULD RESULT IN PERSONAL NUMY OR EYEN DEATH. THERE IS A RISK ASSUMED BY HOMYOUS WHO USE THIS TYPE OF EQUIPMENT. TO MINIMIZE THE BY FEDULES, ALWAYS FOLLOW THESE SIMPLE ROLLS.

- READ AND UNDERSTAND ALL ENCLOSED INSTRUCTIONS before using this equipment.
- INSPECT EQUIPMENT BEFORE EACH USE. Replace all parts at the threst signs of wear or damage. If in doubt about a certain part, DO NOT use the equipment until the part is replaced. Failure to ruplace worn or damaged parts may result in Injury.
- 3. FOLLOW ROUTINE MAINTENANCE SCHEDULE. Refer to the owner's manual/maintenance decal.
- 4. CONSULT YOUR PHYSICIAN BEFORE STARTING ANY EXERCISE PROGRAM. Warm up properly before engaging in weight resistance training. Stop exercising if you feel faint, dizzy or pain.
- 5, TO PREVENT THE POSSIBILITY OF SERIOUS INJURY, KEEP CLEAR OF ALL MOWING PARTS. Do not attempt to free any jammed parts by yourself. Obtain assistance to avoid possible
- 6, CHILDREN SHOULD NOT BE ALLOWED TO USE THIS ECUIPMENT WITHOUT ADULT SUPERVISION. To avoid possible injury, bystanders should be kept at a safe distance when this aquipment is in use.
- 7. CALL YOUR AUTHORIZED
 DISTRIBUTOR If you have any
 questions on the proper use
 or maintenance of this
 equipment
- 8. TO PREVENT POSSIBLE TIPPING boit this unit to the exercise floor. Failure to do so may result in serious

021-0003135








1-800-548-5438 www.hoistfitness.com SERIAL # 00-00-A-000000

SERIAL # DECAL



DANGER

PRIOR TO USING THIS MACHINE

CONSULT A TRAINED SUPERVISOR TO FAMILIARIZE YOU WITH THE MACHINE'S PERFORMANCE CHARACTERISTICS AND PROPER USE.

3. THIS MACHINE IS DESIGNED TO PERFORM EXERCISES IN WHICH BOTH HANDS ARE SECURELY GRASPING THE BAR. NEVER PERFORM ONE-HANDED

BE SURE THAT YOU KNOW HOW TO PROPERLY ENGAGE/DISENGAGE THE BAR HOOK LOCKING MECHANISMS AND THE SAFETY STOPS!

BOTH SAFETY STOPS MUST BE PROPERLY ENGAGED AND ADJUSTED TO THE SAME HEIGHT.

FAILURE TO COMPLY COULD

RESULT IN SERIOUS INJURY

OR EVEN DEATH!

021-0003597

▲ DANGER

BOTH SAFETY STOPS MUST BE ADJUSTED TO SAME HEIGHT TO PREVENT SERIOUS INJURY OR DEATH.

021-0003593



021-0003221

PART LIST

NOTE: SOME OF THESE PARTS MAY COME PRE-INSTALLED

TEM NO	. PART NUMBER	DESCRIPTION	QTY.
1	026-01X2997	FRONT UPRIGHT ASSEMBLY	2
2	026-01X2999	REAR UPRIGHT ASSEMBLY	2
3	026-01X3004	GUIDE ROD HOUSING ASSEMBLY	2
4	026-01X5061	BAR SUPPORT ASSEMBLY	2
5	026-01X5060	OLYMPIC BAR	1
6	026-01X3184	BOTTOM TIE ASSEMBLY	2
7	026-01X3186	SAFETY CATCH GUIDE	2
8	026-01X3205	SAFETY CATCH, RIGHT	1
9	026-01X3206	SAFETY CATCH, LEFT	1
10	026-01X3207	CAM FOLLOWER GUIDE	2
11	026-01X3245	CROSSMEMBER, UPPER	1
13	026-01X3252	COUNTERWEIGHT GUIDE	2
14	010-01C0601	CABLE ASSEMBLY CF-3753 - 98 1/8" LG.	2
15	026-01PL2225	V GROOVE WHEEL	8
16	026-01PL2533	RUBBER DONUT FOR PLASTIC WEIGHT HORN	10
17	026-01PL2211	RUBBER FOOT	2
18	026-01PL2407	RUBBER FOOT	2
20	018-0001002	CABLE PULLEY: Ø3.50"	4
21	019-0001001	PLUG BUMPER	2
22	026-01G0216	ϕ 30MM SHAFT X 82.28" LG.	2
24	026-01M0762	HEAVY FLANGED SPACER: Ø.39" I.D. X 1.50" LG.	4
25	026-01M1047	BAR END	2
26	026-01M2252	COUNTERWEIGHT, 49 LBS	2
27	026-01X6692	CF-3753 & CF-3754 2 SIDED WT. HORN	4
28	026-01X6679	CF-3753 & CF-3754 1 SIDED WT. HORN	2
29	026-01P3154	RACK OUT PLATE	2
30	026-01P6101	SHIELD	2
31	026-01PL2154	PLASTIC KNOB: BASE ∅1.00" ID	2
32	026-01PL2155	PLASTIC KNOB: CAP Ø 1.00" ID	2
33	026-01PL2203	WEIGHT HORN RUBBER DONUT	2
34	026-01PL2229	CHANNEL CAP	2
35	014-0015032	SNAP RING: Ø1.38" EXTERNAL	4

PART LIST CONTINUED

NOTE: SOME OF THESE PARTS MAY COME PRE-INSTALLED

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
36 014-0023010		SNAP RING: Ø47mm INTERNAL	4
37	014-0006006	BEARING: 25MM NEEDLE BEARING	2
38	014-0006007	BEARING:35MM NEEDLE BEARING W/INNER RING	2
39	014-0012012	BEARING: BALL BEARING, ϕ .39" I.D.	6
40	014-0003008	BEARING: 608-2RS BEARING (8mm BORE)	16
41	014-0104003	BEARING: CAGE GUIDED NEEDLE ROLLER	6
42	014-0007011	BEARING ∅30MM (LINEAR) (WON)	4
43	014-0101002	BUSHING: OILITE FLANGED Ø.75" O.D X Ø.50" I.D X .38" LG.	4
44	014-0416001	BUSHING: NYLON FLANGED 1.22" I.D. X .75" O.D. X .81" LG.	4
45	011-0116108	1/2"-13UNC X 1.25" LOW HEAD SHCS (Ni)	2
46	011-0701001	5/16"-18UNC X .5" BHCS (Ni)	16
47	011-0701002	5/16"-18UNC X .75" BHCS (Ni)	20
48	011-0116180	5/16"-18UNC X 2.50" LOW HEAD SHCS (Ni)	8
49	011-0701020	3/8"-16UNC X 1.00" BHCS (Ni)	2
50	011-0701021	3/8"-16UNC X 1.25" BHCS (Ni)	2
51	011-0701024	3/8"-16UNC X 2.00" BHCS (Ni)	6
52	011-0701026	3/8"-16UNC X 2.50" BHCS (Ni)	6
53	011-0116141	3/8"-16UNC X .75" LOW HEAD SHCS (Ni)	8
54	011-0116143	3/8"-16UNC X 1.25" LOW HEAD SHCS (Ni)	6
55	011-0116146	3/8"-16UNC X 2.00" LOW HEAD SHCS (Ni)	2
56	011-0116158	3/8"-16UNC X 5.00" LOW HEAD SHCS (Ni)	2
57	011-0702005	3/8"-16UNC X 1.50" FHCS (Ni)	2
58	011-0116121	1/2"-13UNC X 4.50" LOW HEAD SHCS (Ni)	4
59	011-0116123	1/2"-13UNC X 5.00" LOW HEAD SHCS (Ni)	8
60	011-0116126	1/2"-13UNC X 5.75" LOW HEAD SHCS (Ni)	12
61	013-1010001	1/2" INTERNAL LOCK WASHER (Ni)	2
62	013-1002006	1/2" X 27mm SAE FLAT WASHER (Ni)	60
63	013-1002007	3/8" X 22mm FLAT WASHER (Ni)	56
64	013-1002010	5/16" SAE FLAT WASHER (Ni)	64
65	013-1006003	3/8" SPLIT LOCK WASHER (Ni)	22
66	013-1010003	5/16" INTERNAL LOCK WASHER (Ni)	24
67	013-1010002	3/8" INTERNAL LOCK WASHER (Ni)	8
68	012-0504006	5/16"-18UNC THIN NYLOCK NUT (Ni)	20
69	012-0504005	3/8"-16 UNC THIN NYLOCK NUT (Ni)	16
70	012-0504002	1/2"-13 UNC THIN NYLOCK NUT (Ni)	30

PART LIST CONTINUED

NOTE: SOME OF THESE PARTS MAY COME PRE-INSTALLED

PART NUMBER	DESCRIPTION	QTY.
021-0003626	DECAL WEAR STRIP (BLACK) 1.50" X 72.00" X 30 MIL	2
021-0003135	DECAL WARNING 1.50" X 6.69"	1
021-0003008	DECAL COMMERCIAL MAINTENANCE 1.50 X 6.69	1
021-0003597	DECAL DANGER SAFETY STOP 3.25" X 12" VERT	1
021-0003593	DECAL DANGER 3.88" X .87" (HORIZONTAL)	2
021-0003221	DECAL HOIST 2.50" X 9.13"	1
021-0003113	DECAL PINCH POINT 1.63" X 3.25" (VERTICAL)	2
SERIAL # DECAL	DECAL HOIST SERIAL # 1.63" X 2.63"	1
026-01X2856+CLIP	WEIGHT SELECTOR PIN	2
026-01X5955	CROSSMEMBER	1
011-0116125	1/2"-13UNC X 5.50" LOW HEAD SHCS (Ni)	4
016-0201023	END CAP ∅1.50" (BLACK)	2
026-01PL2532	LONG WEIGHT HORN COVER	10
026-01PL2535	WEIGHT HORN END CAP	10
011-0701084	3/8"-16UNC X 1.25" BHCS (Ni) W/ DRI-LOC PATCH	10
	021-0003626 021-0003135 021-0003008 021-0003597 021-0003593 021-0003221 021-0003113 SERIAL # DECAL 026-01X2856+CLIP 026-01X5955 011-0116125 016-0201023 026-01PL2532 026-01PL2535	021-0003626 DECAL WEAR STRIP (BLACK) 1.50" X 72.00" X 30 MIL 021-0003135 DECAL WARNING 1.50" X 6.69" 021-0003008 DECAL COMMERCIAL MAINTENANCE 1.50 X 6.69 021-0003597 DECAL DANGER SAFETY STOP 3.25" X 12" VERT 021-0003593 DECAL DANGER 3.88" X .87" (HORIZONTAL) 021-0003221 DECAL HOIST 2.50" X 9.13" 021-0003113 DECAL PINCH POINT 1.63" X 3.25" (VERTICAL) SERIAL # DECAL DECAL HOIST SERIAL # 1.63" X 2.63" 026-01X2856+CLIP WEIGHT SELECTOR PIN 026-01X5955 CROSSMEMBER 011-0116125 1/2"-13UNC X 5.50" LOW HEAD SHCS (Ni) 016-0201023 END CAP Ø 1.50" (BLACK) 026-01PL2532 LONG WEIGHT HORN COVER 026-01PL2535 WEIGHT HORN END CAP

ABBREVIATIONS

BZ = Black Zinc

Ni = Nickel Plated

SS = Stainless Steel

WZ = White Zinc



HHB = Hex Head Bolt



FHCS = Flat Head Cap Screw



BHCS = Button Head Cap Screw



SHCS = Socket Head Cap Screw





Low Head SHCS = Low Head Socket Head Cap Screw



SHSS = Socket Head Shoulder Screw

BOLT SIZING CHART 1/4" HHB 5/16" HHB 3/8" HHB 1/2" HHB RECOMMENDED RECOMMENDED RECOMMENDED RECOMMENDED TORQUE RANGE: **TORQUE RANGE: TORQUE RANGE: TORQUE RANGE:** 6-8 ft-lbs 14-17 ft-lbs 24-30 ft-lbs 60-75 ft-lbs 5/16" BHCS 3/8" BHCS 1/2" BHCS 1/4" BHCS RECOMMENDED RECOMMENDED RECOMMENDED RECOMMENDED **TORQUE RANGE:** TORQUE RANGE: TORQUE RANGE: TORQUE RANGE: 5-7 ft-lbs 11-15 ft-lbs 19-26 ft-lbs 47-65 ft-lbs 1/4" 5/16" 3/8" 1/2" **LOW HEAD LOW HEAD** LOW HEAD **LOW HEAD SHCS SHCS SHCS SHCS** \bigcirc RECOMMENDED RECOMMENDED RECOMMENDED RECOMMENDED TORQUE RANGE: TORQUE RANGE: TORQUE RANGE: **TORQUE RANGE:** 4-6 ft-lbs 9-12 ft-lbs 18-23 ft-lbs 40-50 ft-lbs 1/4" SHCS 5/16" SHCS 3/8" SHCS RECOMMENDED RECOMMENDED RECOMMENDED **TORQUE RANGE:** TORQUE RANGE: **TORQUE RANGE:** 11-14 ft-lbs 23-29 ft-lbs 39-49 ft-lbs 3/4" 3/4" 3/ 3/4 0 1/2" FHCS 3/8" FHCS 1/4" FHCS RECOMMENDED RECOMMENDED RECOMMENDED TORQUE RANGE: **TORQUE RANGE:** TORQUE RANGE: 47-65 ft-lbs 5-7 ft-lbs 19-26 ft-lbs 3/4" 3/4" 3/4" 3/4 , ~ 0 \sim $^{\circ}$ 3/8" SHSS 5/16" SHSS 1/4" SHSS RECOMMENDED RECOMMENDED RECOMMENDED **TORQUE RANGE: TORQUE RANGE: TORQUE RANGE:** 17-22 ft-lbs 8-10 ft-lbs 3-4 ft-lbs

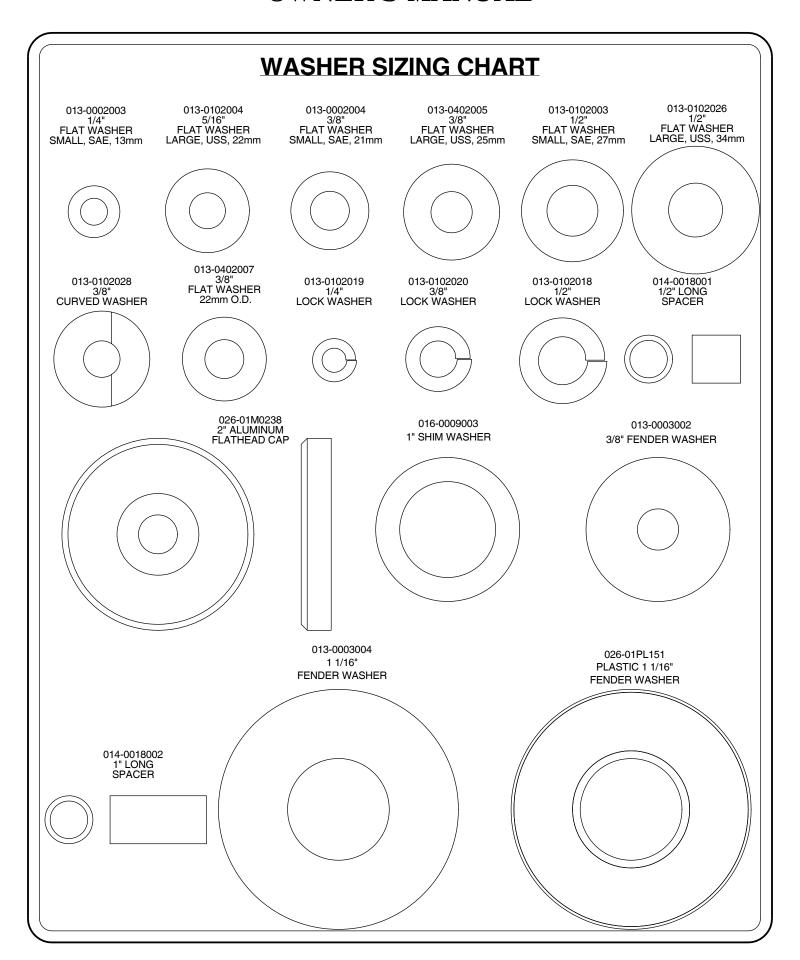

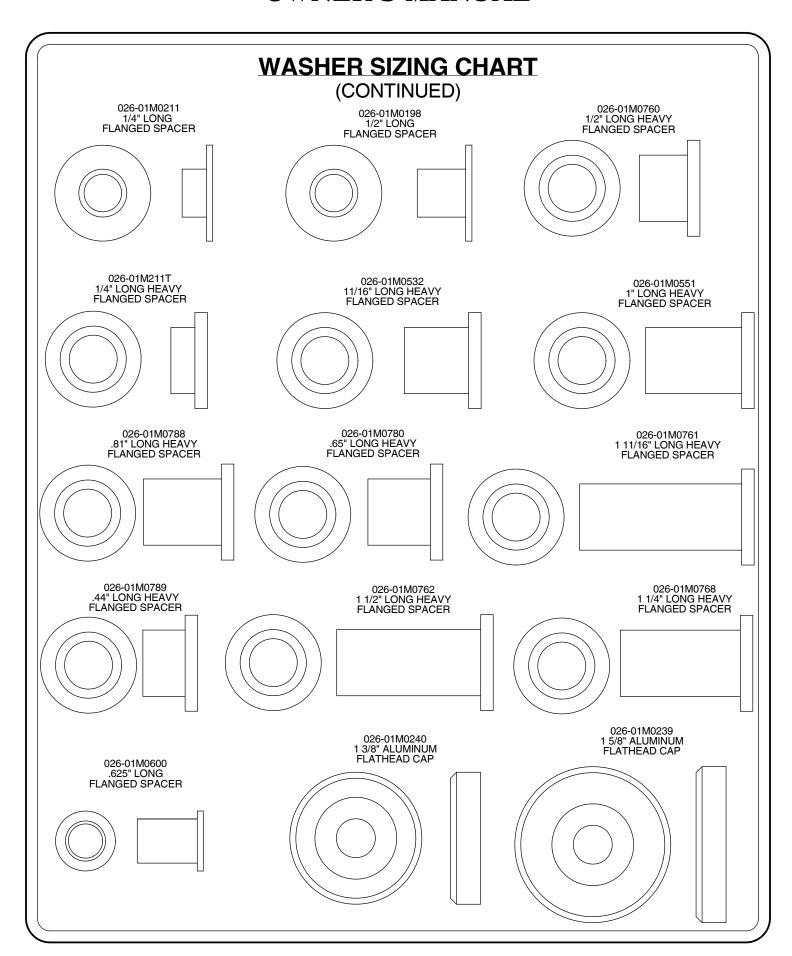

MAINTENANCE SCHEDULE

ROUTINE	COMMERCIAL / LIGHT COMMERCIAL MAINTENANCE	HOME MAINTENANCE	LATEST DATE ENTRY							
Inspect; Links, Pull Pins, Snap Locks, Swivels, Weight Stack Pins	DAILY	WEEKLY								
Clean; Upholstery	DAILY	WEEKLY								
Inspect; Cables or Belts and their tension	DAILY	WEEKLY								
Inspect; Accessory Bars, and Handles	WEEKLY	3 MONTHS								
Inspect; All Decals	WEEKLY	3 MONTHS								
Inspect; All Nuts and Bolts, Tighten if needed	WEEKLY	3 MONTHS								
Inspect; Anti-Skid Surface	WEEKLY	3 MONTHS								
Clean & Lubricate; Guide Rods with a Teflon (PTFE) based lubricant (Superlube)	MONTHLY	3 MONTHS								
Lubricate; Seat Sleeves, Turcite Bushings, Linear Bearing	MONTHLY	3 MONTHS								
Clean and Wax; All Glossy Finishes	6 MONTHS	YEARLY								
Repack with Grease; Linear Bearings	6 MONTHS	YEARLY								
Replace; Cables, Belts and Connecting Parts	YEARLY	3 YEARS								

Your equipment comes with a commercial maintenance decal. For personal, in home use, please follow the home maintenance schedule listed above.

Never use ammonia, acid-based, or petroleum-based solvents on any portion of the machine as it may damage the finish.

HOIST FITNESS SYSTEMS GENERAL MAINTENANCE INFORMATION

Links, Pull-Pins, Snap Hooks, Swivels, Weight Stack Pins:

- *Check all pieces for signs of visible wear or damage.
- *Check springs in snap hooks and pull-pins for proper tension and alignment.
- *If the spring sticks or has lost its rigidity, replace it immediately.

Upholstery:

- *To ensure prolonged upholstery life and proper hygiene, all upholstered pads should be wiped down with a damp cloth after every workout.
- *Periodically take the time to use a mild soap or an approved vinyl upholstery cleaner to deter the onset of cracking or drying. Avoid using any abrasive cleaners or cleaners not intended for use on vinyl.
- *Replace ripped or warn upholstery immediately.
- *Keep sharp or pointed objects clear of all upholstery.

Decals:

*Inspect and familiarize yourself with any safety warnings or other user information posted on each decal.

Nuts and Bolts:

- *Inspect all nuts and bolts for any loosening and tighten if needed.
- *Go through a re-tightening sequence periodically to ensure that all hardware is tensioned proper.

Anti-Skid Surfaces:

*These surfaces are designed to supply secure footing and need to be replaced if they appear worn or become slippery.

Belts and Cables:

- *Hoist uses only high quality belt, and mil-spec cables.
- *Visually inspect the belts and cables for fraying, cracking, peeling or discoloration.
- *While the machine is not in use, carefully run your fingers along the belt or cable to feel for thinning or bulging areas.
- *Replace belts and cables immediately at the first signs of damage or wear. Do not use equipment until belts or cables have been replaced.

Belt and Cable Tension:

- *Referring to the Owners Manual, when belts or cables are used check all bolts attachments to be sure they are properly attached.
- *Check slack in cables and re-adjust cable tension if needed.

Seat Sleeves, Guide Rods:

- *Wipe down adjusting tubes with a dust free rag before applying lubricant.
- *Lubricate seat sleeves and Guide Rods with a Silicon or Teflon based lubricant spray.

Linear Bearings:

*Referring to the Owners Manual carefully disassemble the bearing from its housing and place a finger full of light grease (lithium, super lube, etc.) into the inside of the bearing. Using your finger, press the grease into the ball-bearings and their tracks. repeat until the ball-bearing tracks are full of grease. Insert the shaft back into the bearing and wipe off excess grease.

PLEASE KEEP THIS FOR YOUR RECORDS

WEIGHT TRAINING TIPS

Use this manual to guide you through the basic exercises you can perform on your CF-3753 HOIST® Fitness System. To gain maximum results and avoid possible injury, consult a fitness professional to develop your complete exercise program.

Always consult your physician before starting any exercise program.

To be successful in your exercise program, it is important to develop an understanding of the basic principles of strength training. Now that you have your CF-3753 HOIST® Fitness System, it is only natural that you want to get started immediately. First, determine a set of realistic goals and objectives for yourself. By deciding on an exercise plan that is right for you prior to starting, you will contribute significantly to your success.

Warm up properly before engaging in weight resistance training. Stretching, yoga, jogging, calisthenics or other cardiovascular exercise can help prepare your body for the heavier workload of lifting weights.

Learn how to perform the exercise correctly before using heavy weight. Correct form is important to avoid injury and to ensure that you work the proper muscle groups.


Know your limitations. If you are new to weight training or are embarking on an exercise regimen after a long layoff, start slowly and build foundational strength over a longer period of time.

Pay attention to your breathing. Exhale when you exert is a general rule of thumb. Never hold your breath.

Enjoy your CF-3753 HOIST® Fitness System!

WEIGHT RATIOS

STARTING WEIGHT IS 25 LBS.-

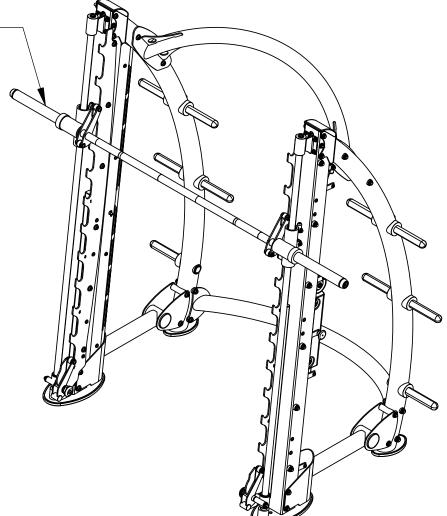

MAXIMUM WEIGHT RATING IS 540 LBS.

The above chart shows the standard weight stack for this unit. The weights listed are approximate. HOIST reserves the right to modify the machine without prior notice.

Exercise Totals Date S Ħ × S R 8 S Ħ 8 S R 8 S R 8 S R 8 S R 8 \mathbf{S} R 8 S R 8 S R Ø S R 8 S Z

WEIGHT TRAINING EXERCISE LOG

S = Sets R = Repetition per set W = Weight used

HOIST FITNESS SYSTEMS LIMITED LIFETIME WARRANTY

Hoist Fitness Systems warrants this product to the **original purchaser** to be free from defects in workmanship and/or materials under normal use or service. If at any time a component part is defective, Hoist Fitness Systems shall repair or replace it (at Hoist Fitness Systems option) within a reasonable period of time. This warranty does not cover costs of removal, transportation or reinstallation. This warranty shall not apply if the defect was caused by misuse, neglect or normal wear and tear.

WARRANTY CLAIMS. All claims require: Model number, Serial number, Date of installation, and any information supporting the existence of the alleged defect.

To complete Warranty Registration visit:

www.HOISTFITNESS.com

and click on the Warranty Registration link

Starting from the original date of purchase, normal wear and tear shall be considered as the following:

COMMERCIAL USE: All malfunctions of upholstery, grips, and coatings that occur up to one year; all malfunctions of belts, or cables up to one year; all malfunctions of pulleys, bearings, or bushings that occur up to three years. The frame and body components are warranted for ten years, with structural moving parts warranted for five years.

LIGHT COMMERCIAL USE: All malfunctions of upholstery, grips, and coatings that occur up to one year; all malfunctions of belts, or cables up to one year; all malfunctions of pulleys, bearings, or bushings that occur up to three years. The frame and body components are warranted for ten years, with structural moving parts warranted for five years.

HOME USE: All malfunctions of grips, paint, and chrome that occur up to ten years; all malfunctions of electronic components, belts, cables, or upholstery that occur up to ten years; all malfunctions of pulleys, bearings, or bushings that occur up to ten years. The frame and all welded components are warranted for the life of the product.

PLEASE NOTE THAT NOT ALL HOIST PRODUCTS ARE MADE FOR COMMERCIAL USE. Refer to the instructions page of your owners manual or consult with you fitness product dealer to establish if a product is made for commercial use or not. Using a non-commercial product in a commercial setting can result in serious injury or death! Hoist Fitness Systems sole responsibility shall be to repair or replace the component within the terms stated above. Hoist Fitness Systems shall not be liable for any loss or damage of any kind including any incidental or consequential damages resulting, directly or indirectly from any warranty expressed or implied or any other failure of this product.

LIGHT COMMERCIAL USE: Our Light Commercial warranty applies to facilities that **DO NOT** charge monthly membership dues and where the equipment would be used by **no more than 50** people per day. Examples of Light Commercial facilities include hotels, apartment complexes, personal training studios, fire stations, police stations, etc., that meet the criteria stated above.

WHAT IS NOT COVERED BY THIS WARRANTY: Hoist's sole obligation under this warranty is limited to either repair or replacement of parts, subject to the additions below. This warranty neither assumes nor authorizes any person to assume obligations other than expressly covered by this warranty.

NO CONSEQUENTIAL DAMAGES: Hoist is not responsible for economic loss; profit loss; or special, indirect, or consequential damages.

WARRANTY IS NOT TRANSFERABLE: This warranty is not assignable and applies only in favor of the original purchaser/user to whom delivered. Any such assignment or transfer shall void the warranties herein made and shall void all warranties, expressed, implied or statutory, except the one (1) and five (5) year warranties described above. These warranties are exclusive and in lieu of all other warranties, including implied warranty and merchantability or fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof.

TRANSPORTATION COSTS: Hoist will accept parts covered under this warranty freight collect, provided that shipment has received prior approval. Hoist is not responsible for any other transportation costs, but will ship freight collect parts either repaired or replaced under these warranties.

Hoist Fitness Systems 11900 Community Rd. Poway, CA. 92064 (800)548-5438

PLEASE KEEP THIS FOR YOUR RECORDS