

# Bolle Wall

BTWA04

CE IP20 UK  
CA

## Materials

Hand blown transparent borosilicate glass and hand finished or electroplated brass.

## Weight incl. canopy

~2 kg

## Power Input

220-240V 50-60Hz

## Light Source (included)

Proprietary Softspot50 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 50% downwards and 50% upwards.




BOLLE WALL 4 BUBBLES

## CONFIGURATION

### STEP 1 - CHOOSE YOUR METAL FINISH



### SIZE (UNIT: CM)

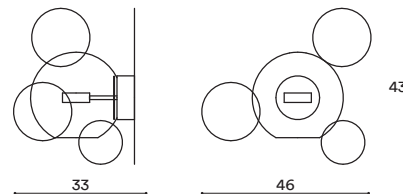


### STEP 2 - CHOOSE YOUR CANOPY AND DRIVER

CANOPY AND DRIVER

#### + STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D120 canopy with a builtin LED driver with **phasecut dimming** as standard.

D120 | Ø12 X 4CM




MATCHING FINISH

PHASECUT

#### + OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician. These dimming and canopy combinations are available as following:

D120 | Ø12 X 4CM



MATCHING FINISH

1-10 VOLT


SWITCH/PUSH

DALI

#### + REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D120 | Ø12 X 4CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI