

# Cirque Ceiling/Wall Ellipse

CQCWEL40

CE IP20 UK CA

## Materials

Transparent borosilicate glass and hand finished brass.

## Weight incl. canopy


~4 kg

## Power Input

220-240V 50-60Hz

## Light Source (included)


4 Proprietary Cirque LEDs.  
18W, 1600Lumens, 2700K warm white.  
CRI>95.

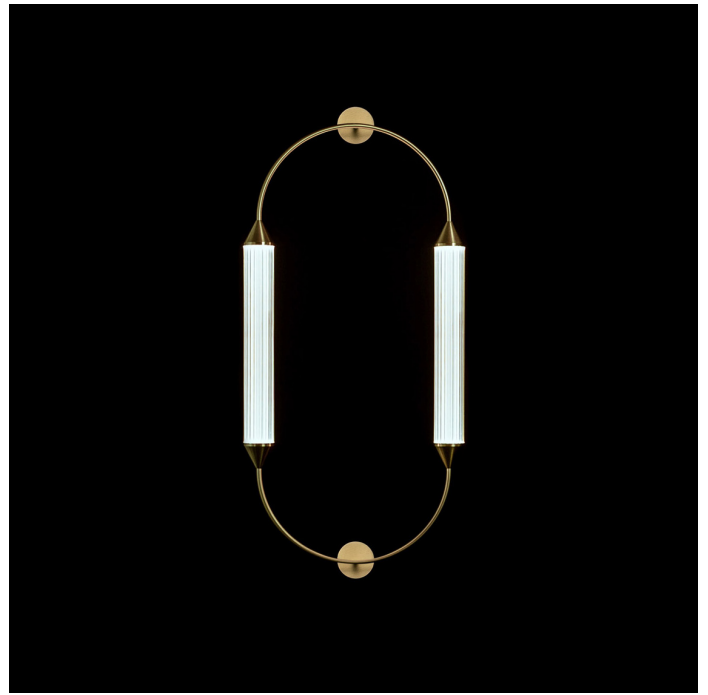


CIRQUE CEILING/WALL ELLIPSE

## CONFIGURATION

### STEP 1 - CHOOSE YOUR METAL FINISH

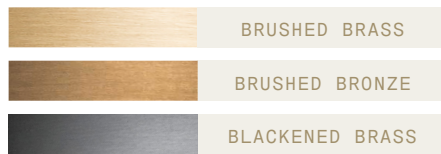

### SIZE (UNIT: CM)



### STEP 2 - CHOOSE YOUR CANOPY AND DRIVER


CANOPY AND DRIVER

#### + STANDARD BUILTIN PHASECUT DRIVER

A. We provide a multiple D135 canopy with a builtin LED driver with **phasecut dimming** as standard.

D135 | Ø13.5 X 4.5CM

MATCHING FINISH




PHASECUT

**+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST**

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

1-10 VOLT


SWITCH/PUSH

DALI

**+ REMOTE DRIVERS AVAILABLE ON REQUEST**

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D95 | Ø9.5 X 4CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI