

# Cirque Floor-to-Ceiling Column

CQFCCM

CE IP20 UK CA

## Materials


Transparent borosilicate glass and hand finished brass.

## Power Input

220-240V 50-60Hz

## Light Source (included)

2 Proprietary Cirque LEDs.  
9W, 800Lumens, 2700K warm white.  
CRI>95.

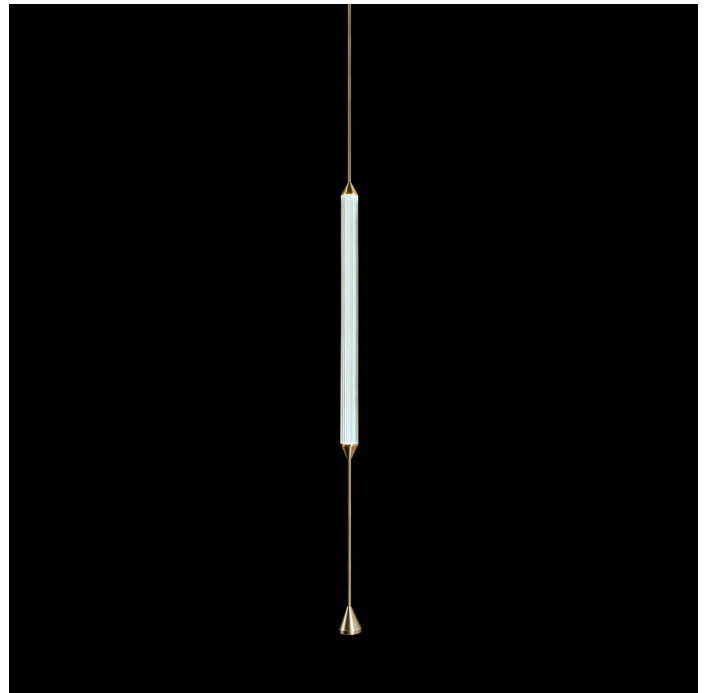


CIRQUE FLOOR-TO-CEILING COLUMN 90

## CONFIGURATION

### STEP 1 - CHOOSE YOUR SIZE

SIZE (UNIT: CM)

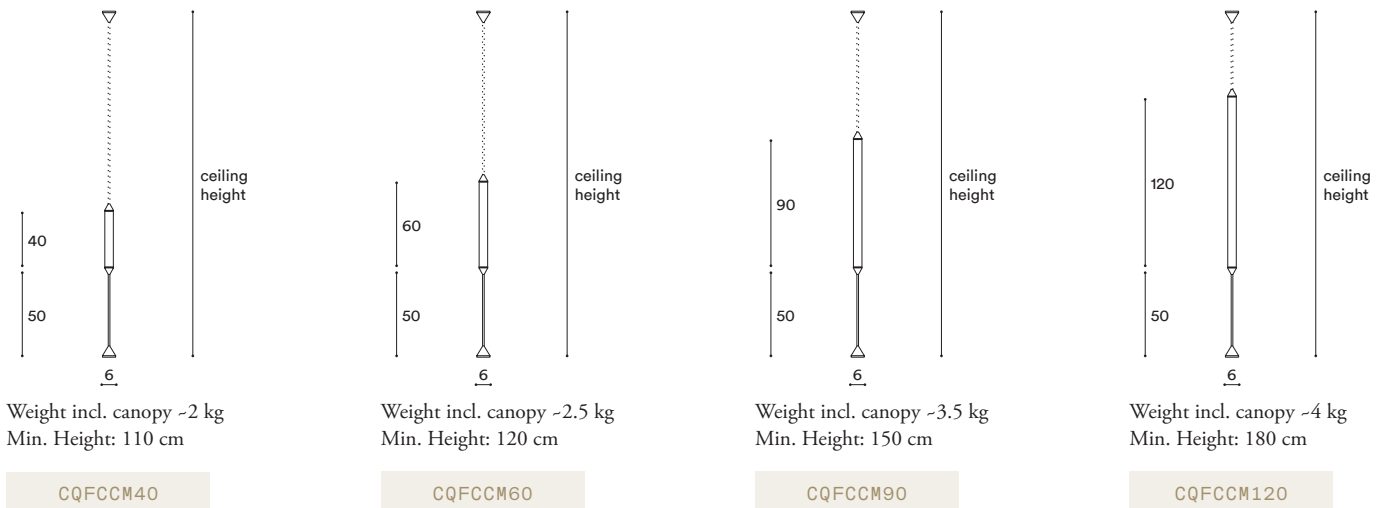

### STEP 2 - CHOOSE YOUR METAL FINISH

METAL FINISH



### STEP 3 - CHOOSE YOUR CEILING HEIGHT

CEILING HEIGHT

## Metal tube suspension

Specify your Ceiling height in cm to our sales team.

Note:  
No cable showing  
Not adjustable on site

MADE TO ORDER

**+ STANDARD BUILTIN PHASECUT DRIVER**

A. We provide a D95 canopy with a builtin LED driver with **phasecut dimming** as standard.

D95 | Ø9.5 X 8.5CM



MATCHING FINISH

PHASECUT

**+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST**

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician. These dimming options are available as following:

D95 | Ø9.5 X 8.5CM



MATCHING FINISH

1-10 VOLT

SWITCH/PUSH

D120 | Ø12 X 10.5CM



MATCHING FINISH

DALI

**+ REMOTE DRIVERS AVAILABLE ON REQUEST**

B. If your electrician can wire the LED Driver remotely (rather than builtin to the canopy) we can provide it. These dimming options are available as following:

D95 | Ø9.5 X 8.5CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI