

Cirque Pendant Column

CQPECM

CE IP20 UK
CA

Materials


Transparent borosilicate glass and hand finished brass.

Power Input

220-240V 50-60Hz

Light Source (included)

2 Proprietary Cirque LEDs.
9W, 800Lumens, 2700K warm white.
CRI>95.

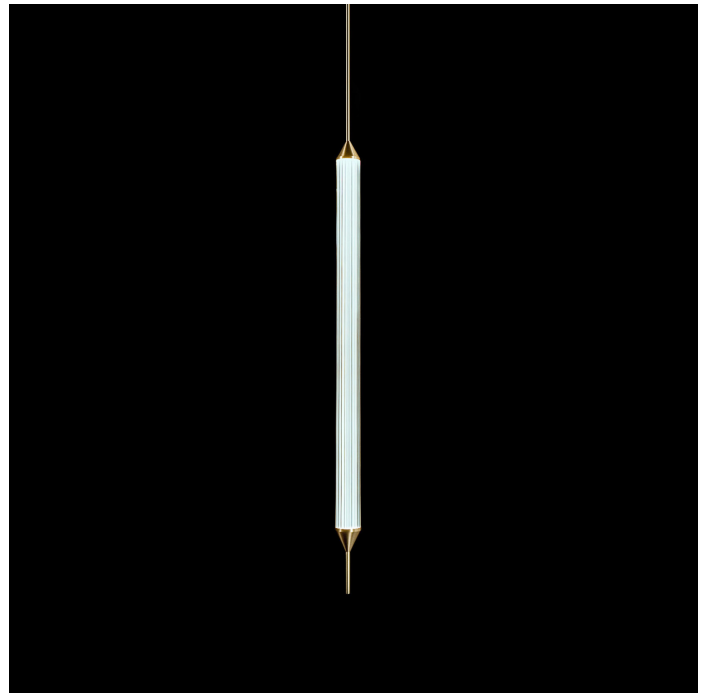


CIRQUE PENDANT COLUMN 90

CONFIGURATION


STEP 1 - CHOOSE YOUR SIZE

SIZE (UNIT: CM)




Weight incl. canopy ~1.1 kg
Min. Drop Height: 90 cm

CQPECM40



Weight incl. canopy ~1.8 kg
Min. Drop Height: 110 cm

CQPECM60

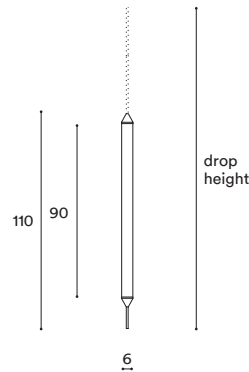

Weight incl. canopy ~3.5 kg
Min. Drop Height: 140 cm

CQPECM90

STEP 2 - CHOOSE YOUR METAL FINISH

METAL FINISH



BRUSHED BRASS



BRUSHED BRONZE



BLACKENED BRASS

STEP 3 - CHOOSE YOUR DROP HEIGHT

DROP HEIGHT

Metal tube suspension

Specify your Drop height in cm
to our sales team.

Note:
No cable showing
Not adjustable on site

MADE TO ORDER

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D85 canopy with a builtin LED driver with **phasecut dimming** as standard.

D85 | Ø8.5 X 4CM



MATCHING FINISH

PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician. These dimming options are available as following, combined with a D120 Canopy:

D120 | Ø12 X 4.5CM



MATCHING FINISH

1-10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Driver remotely (rather than builtin to the canopy) we can provide combined with a D60 Canopy. These dimming options are available as following:

D60 | Ø6 X 2CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI