

Dewdrops Chandelier Circular 05 Bubbles

DDCHCR05

CE IP20 UK
CA

Materials

Hand blown transparent borosilicate glass and hand finished or electroplated brass.

Weight incl. canopy


~5.5 kg

Power Input

220-240V 50-60Hz

Light Source (included)

5 LED GlassDrops, 2 LED UpSpots, 20W, 1650 Lumens, 2700K warm white. CRI>90.

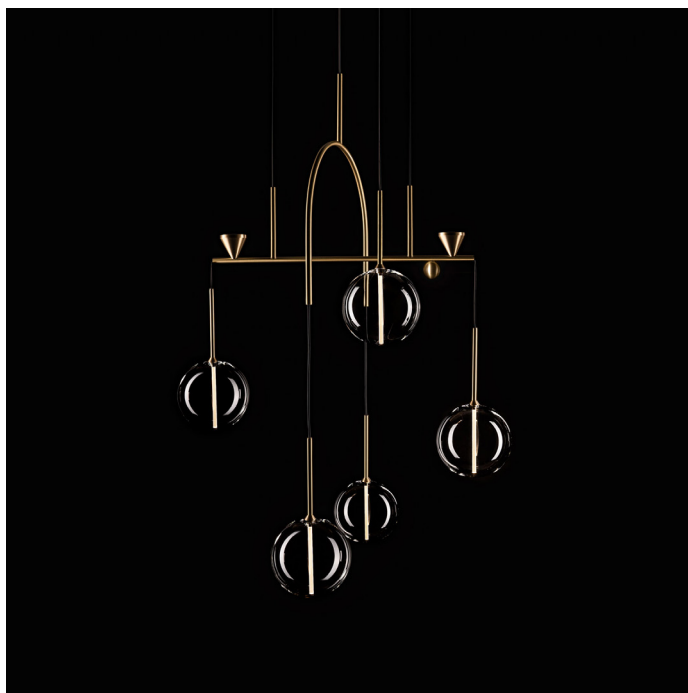


DEWDROPS CHANDELIER CIRCULAR 05 BUBBLES

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)

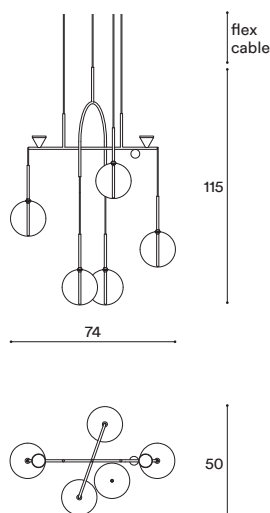

STEP 2 - CHOOSE YOUR SUSPENSION TYPE

SUSPENSION TYPE



Black Fabric Flex Cable

Drop height adjustable on site:

4M

10M



White Fabric Flex Cable

Drop height adjustable on site:

4M

10M

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D300 canopy with a builtin LED driver with **phasecut dimming** as standard.

D300 | Ø30 X 5CM



WHITE



MATCHING FINISH






+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.



D300 | Ø30 X 5CM



WHITE



MATCHING FINISH





+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:


D300 | Ø30 X 5CM



WHITE



MATCHING FINISH



Dewdrops Chandelier Linear 07 Bubbles

DDCHLN07

CE IP20 UK
CA

Materials

Hand blown transparent borosilicate glass and hand finished or electroplated brass.

Weight incl. canopy

~8 kg

Power Input

220-240V 50-60Hz

Light Source (included)

7 LED GlassDrops, 3 LED UpSpots. 29W, 2390 Lumens, 2700K warm white. CRI>90.




DEWDROPS CHANDELIER LINEAR 07 BUBBLES

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)

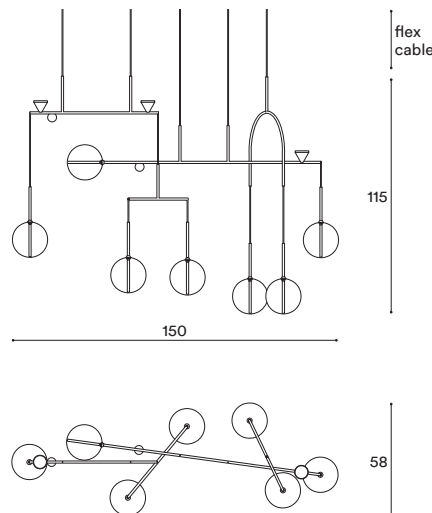

STEP 2 - CHOOSE YOUR SUSPENSION TYPE

SUSPENSION TYPE



Black Fabric Flex Cable

Drop height adjustable on site:

4M

10M



White Fabric Flex Cable

Drop height adjustable on site:

4M

10M

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a L950 canopy with a builtin LED driver with **phasecut dimming** as standard.

L950 | 95 X 11.5 X H3.5CM



WHITE



PHASECUT

MATCHING FINISH



PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.


L950 | 95 X 11.5 X H3.5CM




WHITE



1-10 VOLT




SWITCH/PUSH




DALI


MATCHING FINISH



1-10 VOLT



SWITCH/PUSH



DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

L950 | 95 X 11.5 X H3.5CM




WHITE



PHASECUT



1-10 VOLT



SWITCH/PUSH




DALI

MATCHING FINISH



PHASECUT



1-10 VOLT



SWITCH/PUSH



DALI