

Flauti Wall

FLWA

CE IP20 UK CA

Materials

Hand blown Murano glass and hand finished or electroplated brass.

Weight incl. canopy

~1.5 kg

Power Input

220-240V 50-60Hz

Light Source (included)

Proprietary Softspot75 LED,
9W, 380 Lumens, 2700K warm white. CRI>95.
75% downwards and 25% upwards

Custom structure dimensions available on request.




FLAUTI WALL 01

CONFIGURATION

STEP 1 - CHOOSE MODEL

MODEL (UNIT: CM)

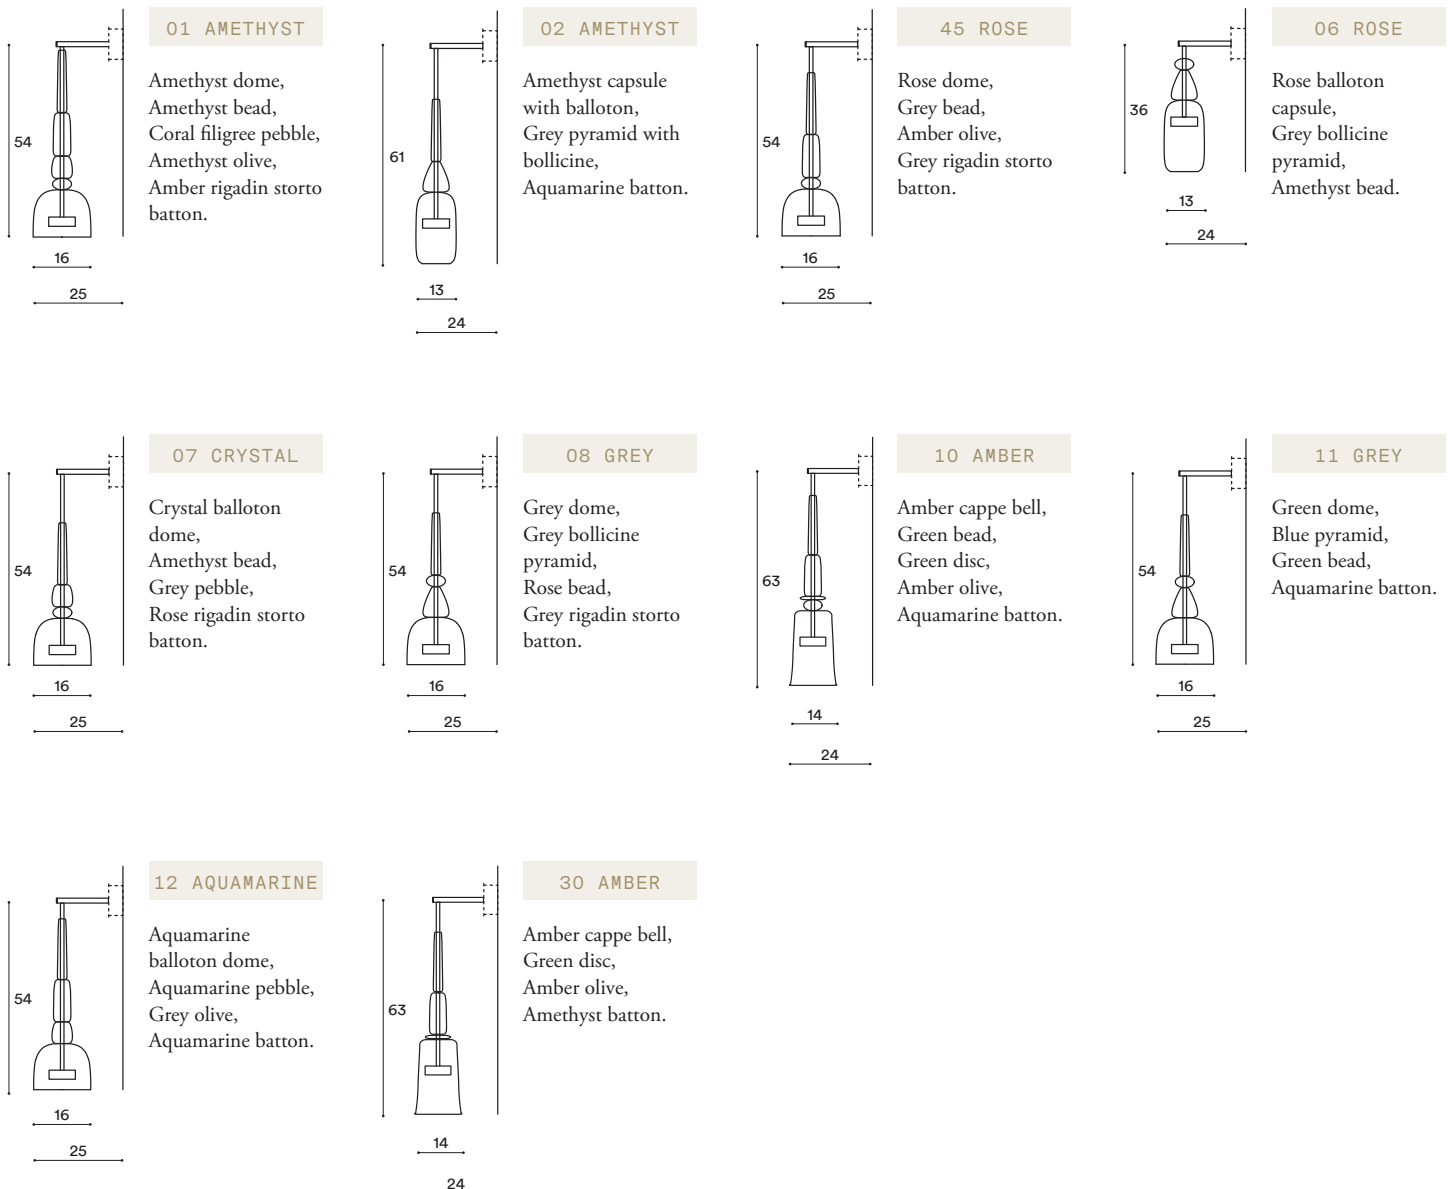




+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D95 canopy with a builtin LED driver with **phasecut dimming** as standard.

D95 | Ø9.5 X 4CM

MATCHING FINISH




PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician. These dimming and canopy combinations are available as a single D135 circular canopy, in the following dimensions:

D135 | Ø13.5 X 4.5CM

MATCHING FINISH



1-10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D95 | Ø9.5 X 4CM

MATCHING FINISH



PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI