

Maehwa Chandelier Flow 26

MECHF26

CE IP20 UK
CA

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Weight incl. canopy

~9 kg

Power Input

220-240V 50-60Hz

Light Source (included)

26 Proprietary Maehwa LEDs. 21.6 W, 3170 lm, 2700K warm white. CRI>95. Energy label A.

Modules:

1 x MEPEH09


1 x MEPEH17Y




MAEHWA CHANDELIER FLOW 26

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)

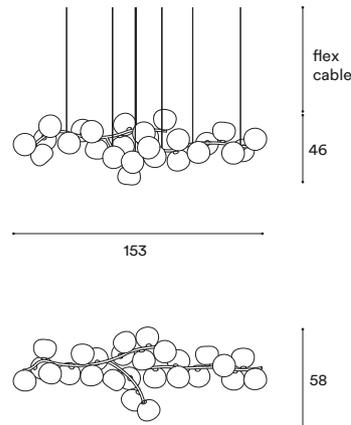

STEP 2 - CHOOSE YOUR GLASS COLOUR COMBINATION



*For a custom mix please contact the studio.

Steel Wire and Flex Cable
Suspension, adjustable on site.

Available options:

4M

10M

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a L350 canopy with a builtin LED driver with **phasecut dimming** as standard.

L350 | 35 X 8 X H5CM



WHITE

PHASECUT

*Custom Canopy Colour
(RAL Classic) available on
request

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.
These dimming options are available as following:

L350 | 35 X 8 X H5CM



WHITE

1 - 10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide it.
These dimming options are available as following:

L350 | 35 X 8 X H5CM



WHITE

PHASECUT

1 - 10 VOLT

SWITCH/PUSH

DALI

Maehwa Chandelier Flow 34

MECHF34

CE IP20 UK
CA

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Weight incl. canopy

-12 kg

Power Input

220-240V 50-60Hz

Light Source (included)

34 Proprietary Maehwa LEDs. 28.2 W, 4150 lm, 2700K warm white. CRI>95. Energy label A.

Modules:


2 x MEPEH17Y




MAEHWA CHANDELIER FLOW 34

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)

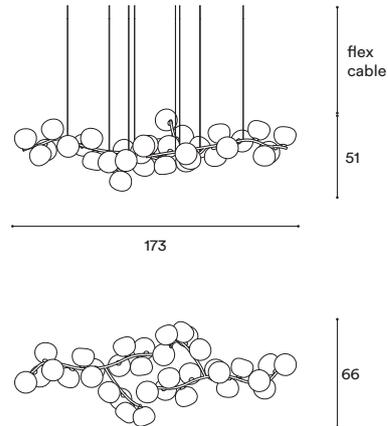

STEP 2 - CHOOSE YOUR GLASS COLOUR COMBINATION



*For a custom mix please contact the studio.

Steel Wire and Flex Cable
Suspension, adjustable on site.

Available options:

4M

10M

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a L650 canopy with a builtin LED driver with **phasecut dimming** as standard.

L650 | 65 X 8 X H5CM



WHITE

PHASECUT

*Custom Canopy Colour
(RAL Classic) available on
request

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.
These dimming options are available as following:

L650 | 65 X 8 X H5CM



WHITE

1 - 10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide it.
These dimming options are available as following:

L650 | 65 X 8 X H5CM



WHITE

PHASECUT

1 - 10 VOLT

SWITCH/PUSH

DALI