

Maehwa Ceiling Wall 3

MECW03

CE IP20 UK CA

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Weight incl. canopy

-2 kg

Power Input

220-240V 50-60Hz

Light Source (included)

3 Proprietary Maehwa LEDs 5 W, 510 lm, 2700K warm white. CRI>95. Energy label A.




MAEHWA CEILING WALL 3

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)



STEP 2 - CHOOSE YOUR GLASS COLOUR COMBINATION



*For a custom mix please contact the studio.

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D135 canopy with a builtin LED driver with **phasecut dimming** as standard.

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

1-10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI

Maehwa Ceiling Wall 6

MECW06

CE IP20 UK
CA

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Weight incl. canopy

~4 kg

Power Input

220-240V 50-60Hz

Light Source (included)

6 Proprietary Maehwa LEDs 5 W, 510 lm, 2700K warm white. CRI>95. Energy label A.




MAEHWA CEILING WALL 6

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)



STEP 2 - CHOOSE YOUR GLASS COLOUR COMBINATION



*For a custom mix please contact the studio.

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D135 canopy with a builtin LED driver with **phasecut dimming** as standard.

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

1-10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI

Maehwa Ceiling Wall 8

MECW08

CE IP20 UK CA

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Weight incl. canopy

~4 kg

Power Input

220-240V 50-60Hz

Light Source (included)

8 Proprietary Maehwa LEDs 6.7 W, 685 lm, 2700K warm white. CRI>95. Energy label A.




MAEHWA CEILING WALL 8

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)



STEP 2 - CHOOSE YOUR GLASS COLOUR COMBINATION



*For a custom mix please contact the studio.

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D135 canopy with a builtin LED driver with **phasecut dimming** as standard.

D135 | Ø13.5 X 4.5CM




MATCHING FINISH

PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

1-10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI

Maehwa Ceiling Wall 11

MECW11

CE IP20 UK CA

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Weight incl. canopy

~5 kg

Power Input

220-240V 50-60Hz

Light Source (included)

11 Proprietary Maehwa LEDs 9.1 W, 940 lm, 2700K warm white. CRI>95. Energy label A.



MAEHWA CEILING WALL 11

CONFIGURATION


STEP 1 - CHOOSE YOUR METAL FINISH



BRUSHED BRASS

BRUSHED NICKEL

SIZE (UNIT: CM)



STEP 2 - CHOOSE YOUR GLASS COLOUR COMBINATION



TRANSPARENT



PALE PINK MIX*

blushed pale pink (6x)
+ translucent (5x)



OPAL WHITE MIX*

blushed opal white (6x)
+ translucent (5x)



SMOKEY GREY MIX*

blushed smokey grey (6x)
+ translucent (5x)

*For a custom mix please contact the studio.

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D135 canopy with a builtin LED driver with **phasecut dimming** as standard.

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

1-10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI

Maehwa Ceiling Wall 19

MECW19

CE IP20 UK CA

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Weight incl. canopy

-8 kg

Power Input

220-240V 50-60Hz

Light Source (included)

19 Proprietary Maehwa LEDs 15.8 W, 1625 lm, 2700K warm white. CRI>95. Energy label A.




MAEHWA CEILING WALL 19

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)



STEP 2 - CHOOSE YOUR GLASS COLOUR COMBINATION



*For a custom mix please contact the studio.

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D215 canopy with a builtin LED driver with **phasecut dimming** as standard.

D215 | Ø21.5 X 5CM



MATCHING FINISH

PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.

D215 | Ø21.5 X 5CM



MATCHING FINISH

1-10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D215 | Ø21.5 X 5CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI

Maehwa Ceiling Wall 67

MECW67

CE IP20 UK CA

Materials

Transparent, translucent or blushed handblown borosilicate glass, handmade finish electroplated brass.

Weight incl. canopy


-31 kg

Power Input

220-240V 50-60Hz

Light Source (included)

67 Proprietary Maehwa LEDs 55.6 W, 5720 lm, 2700K warm white. CRI>95. Energy label A.

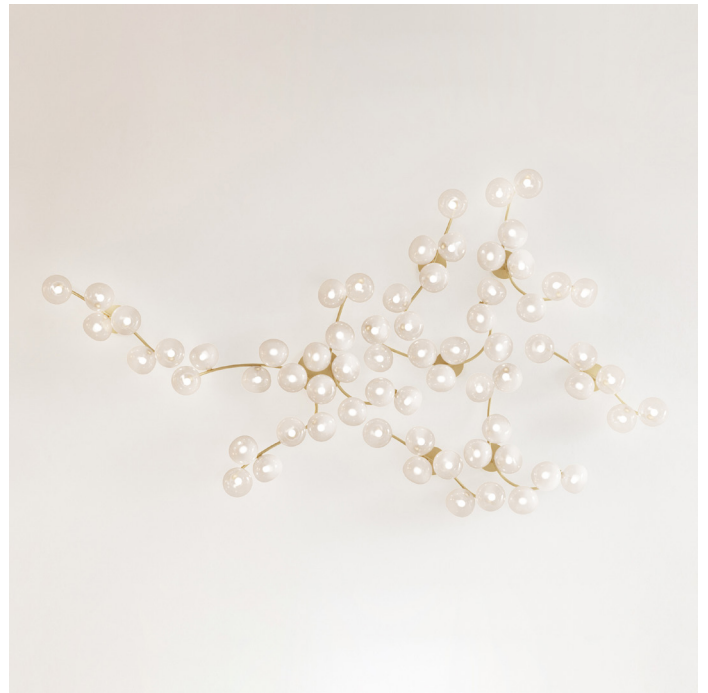


MAEHWA CEILING WALL 67

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)

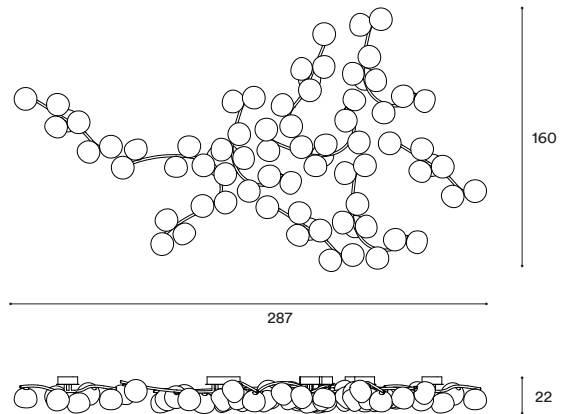

STEP 2 - CHOOSE YOUR GLASS COLOUR COMBINATION



TRANSPARENT



PALE PINK MIX*

blushed pale pink (34x)
+ translucent (33x)



OPAL WHITE MIX*

blushed opal white (34x)
+ translucent (33x)



SMOKEY GREY MIX*

blushed smokey grey (34x)
+ translucent (33x)

*For a custom mix please contact the studio.

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D215 canopy with a builtin LED driver with **phasecut dimming** as standard.

X1 D215 | Ø21.5 X 5CM



X7 D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.

X1 D215 | Ø21.5 X 5CM



X7 D135 | Ø13.5 X 4.5CM



MATCHING FINISH

1 - 10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

X1 D215 | Ø21.5 X 5CM



X7 D135 | Ø13.5 X 4.5CM



MATCHING FINISH

PHASECUT

1 - 10 VOLT

SWITCH/PUSH

DALI