

Milky Way Floor-to-ceiling Column

MWFCCM

CE IP20 UK
CA

Materials

Electroplated Aluminium, Cathedral glass, Marble
(Green Guatemala Cone), Verde Alpi marble rock

Weight incl. canopy

Polished gold and nickel finished aluminium ~15 kg
Brushed brass and blackened brass ~20 kg

Power Input

220-240V 50-60Hz

Light Source (included)

Strip LEDs. 53W, 4340 Lumens, 2700K warm
white. CRI>90.




MILKY WAY FLOOR-TO-CEILING COLUMN

CONFIGURATION

STEP 1 - CHOOSE YOUR METAL FINISH



SIZE (UNIT: CM)

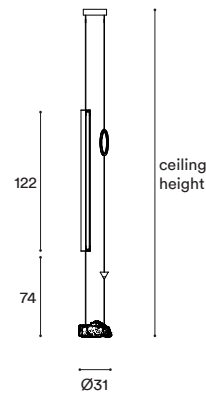

STEP 2 - CHOOSE YOUR CEILING HEIGHT

CEILING HEIGHT

Steel Wire and Flex Cable Suspension,
adjustable on site.

Available options:

4M

10M

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D200 canopy with a builtin LED driver with **phasecut dimming** as standard.

D200 | Ø20 X 5CM



MATCHING FINISH

PHASECUT

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician.

D200 | Ø20 X 5CM



MATCHING FINISH

1-10 VOLT

SWITCH/PUSH

DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide the following options:

D200 | Ø20 X 5CM



MATCHING FINISH

PHASECUT

1-10 VOLT

SWITCH/PUSH

DALI