

Soffio Pendant

STPE

CE IP20 UK CA

Materials

Hand blown transparent borosilicate glass and hand finished or electroplated brass.

Power Input

220-240V 50-60Hz

Light Source (included)

Proprietary Softspot75 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards




SOFFIO PENDANT 35

CONFIGURATION


STEP 1 - CHOOSE YOUR SIZE

SIZE (UNIT: CM)

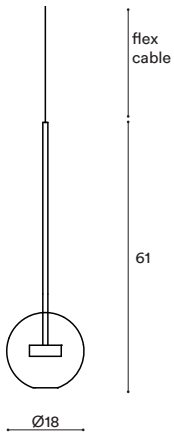


Weight incl. canopy: ~1.5 kg
Minimum Drop height: 66 cm

STPE18

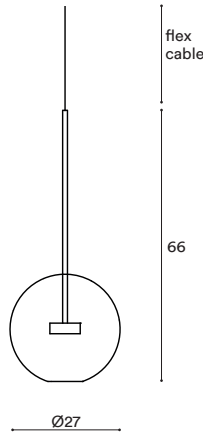

Weight incl. canopy: ~2 kg
Minimum Drop height: 71 cm

STPE27

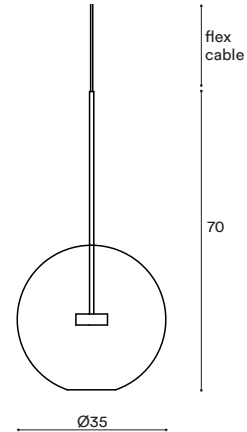


Weight incl. canopy: ~2.5 kg
Minimum Drop height: 75 cm

STPE35

STEP 2 - CHOOSE YOUR METAL FINISH

METAL FINISH




BRUSHED BRASS



BLACKENED BRASS



POLISHED NICKEL



BRUSHED BRONZE



BRUSHED NICKEL

STEP 3 - CHOOSE YOUR SUSPENSION TYPE

SUSPENSION TYPE



Black Fabric Flex Cable

Drop height adjustable on site:

4M

10M



White Fabric Flex Cable

Drop height adjustable on site:

4M

10M



Metal tube

Specify your Drop height in cm to our sales team.

No cable showing
Not adjustable on site

MADE TO ORDER

+ STANDARD BUILTIN PHASECUT DRIVER

A. We provide a D95 canopy with a builtin LED driver with **phasecut dimming** as standard. This dimming and canopy combination is available in the following finishes:

D95 | Ø9.5 X 4CM



BLACK PHASECUT

WHITE PHASECUT

MATCHING FINISH PHASECUT

*Custom Canopy Colour (RAL Classic) available on request

+ OTHER BUILTIN DRIVERS AVAILABLE ON REQUEST

B. We can also provide builtin LED drivers with **1-10 Volt, Switch / Push or DALI** dimming, if required by your electrician. These drivers are larger and require a D135 canopy. These dimming and canopy combinations are available in the following finishes:

D135 | Ø13.5 X 4.5CM



BLACK 1-10 VOLT
 SWITCH/PUSH
 DALI

WHITE 1-10 VOLT
 SWITCH/PUSH
 DALI

MATCHING FINISH 1-10 VOLT
 SWITCH/PUSH
 DALI

+ REMOTE DRIVERS AVAILABLE ON REQUEST

B. If your electrician can wire the LED Drivers remotely (rather than builtin to the canopy) we can provide a D70 canopy for solid ceilings or D50 for false ceilings. These dimming and canopy combinations are available in the following finishes:

D70 | Ø7 X 2CM




BLACK PHASECUT
 1-10 VOLT
 SWITCH/PUSH
 DALI

WHITE PHASECUT
 1-10 VOLT
 SWITCH/PUSH
 DALI

MATCHING FINISH PHASECUT
 1-10 VOLT
 SWITCH/PUSH
 DALI

D50 | Ø5 X 0.7CM



BLACK PHASECUT
 1-10 VOLT
 SWITCH/PUSH
 DALI

WHITE PHASECUT
 1-10 VOLT
 SWITCH/PUSH
 DALI