



30cm

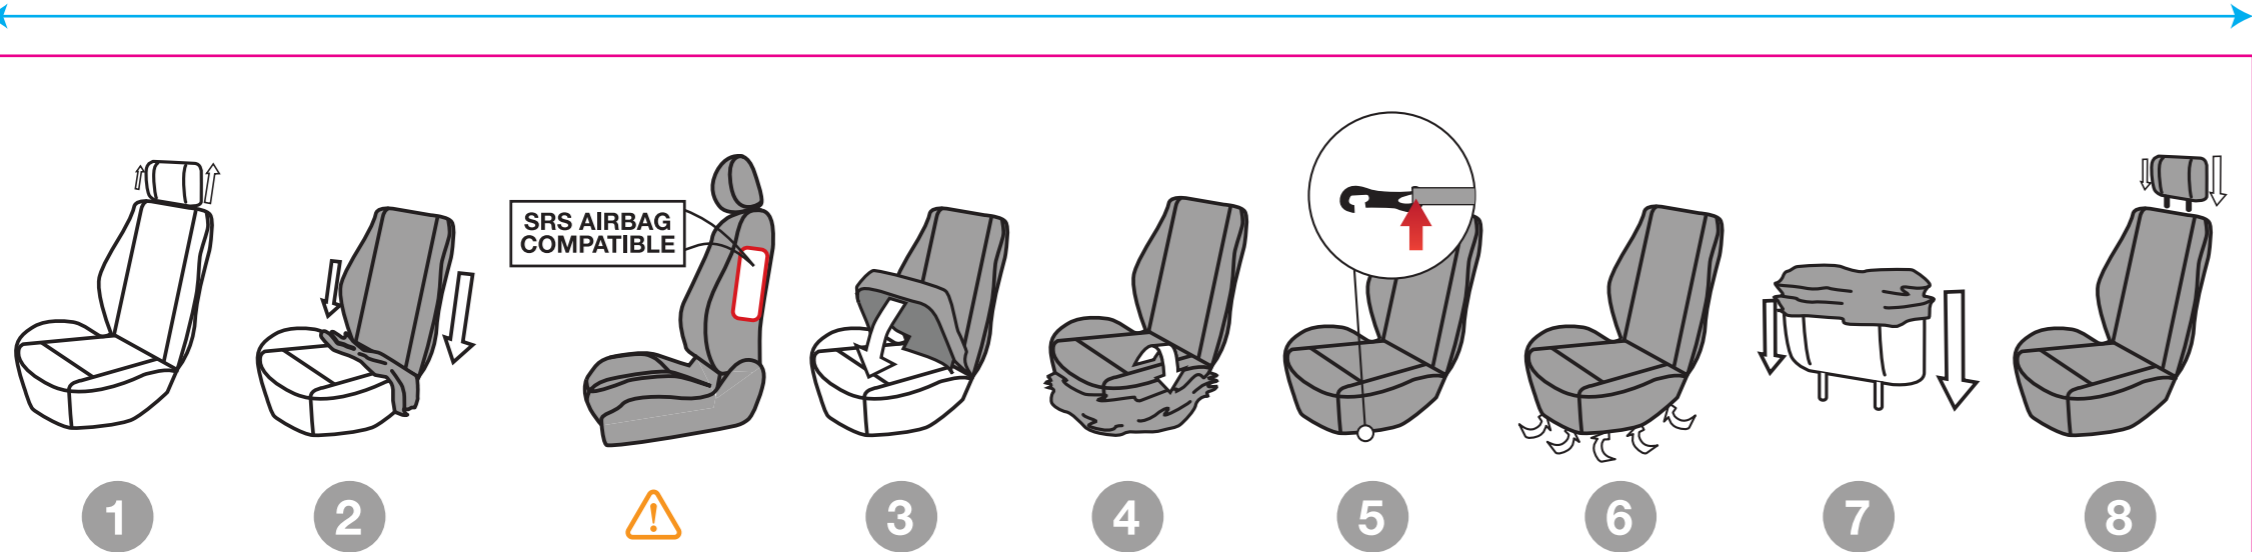

- 1
- 2
- ⚠
- 3
- 4
- 5
- 6
- 7
- 8

- 1 Remove headrest. *Hint: Most vehicles have a button at the base of the headrest posts that release the headrest*
- 2 Slide the seat cover over the back rest of your seat from top to bottom, smooth to fit. Fit seat cover to bottom portion of seat - do not use excessive force
- ⚠ **WARNING: The airbag label on your new seat cover must be positioned over the seat area that contains the airbag, see image above. The airbag label designates the fitment of the cover - the airbag label must always point outside towards the door**
- 3 Pull bottom of seat cover over the seat from front to back
- 4 Smooth seat bottom to fit  
Use the wedge provided with the seat cover to tuck into the crevice located between your car's back rest and seat. Slide the wedge anchor between the top and bottom half of the seats to secure the cover. The bottom half wedge anchors will go on the 'outside' while the top half wedge anchor will slide 'inside' the bottom wedge anchors
- 5 Mount the "S"-hook onto elastic loop through the end with smaller opening.
- 6 Tuck the elastic loops between the top and bottom of the seat, pull them tight and hook them in with the "S" -hooks connecting to the seating components underneath the seat. Please ensure you do not hook onto components that will interfere with function of the seat.
- 7 Slide headrest cover over the seats headrest
- 9 Replace headrest onto seat

**⚠ WARNING**



**PLEASE WEAR SAFETY GOGGLES WHEN INSTALLING SEAT COVERS. THE HOOKS ON THE ELASTIC STRAPS CAN SNAP BACK WITH FORCE AND CAUSE INJURY**

16cm

8.89cm




**Problems? We can solve them!**  
Contact us before returning to the store.

**Des problèmes? Nous pouvons les résoudre!**  
Contactez-nous avant de retourner un article au magasin.

**¿Problemas? ¡Podemos resolverlos!**  
Póngase en contacto con nosotros antes de regresar a la tienda.

**1-800-387-3217**  
feedback@alpena.ca

 @AlpenaAutomotive  alpena.ca

8.89cm