

LOW PROFILE LED SURFACE MOUNT DISK LIGHT




The disc surface mount LED downlight in 4 inch and 6 inch is low profiled installation solution designed to fit the tightest of spaces. The driverless DOB driver onboard technology allows this fixture to fasten to most 3 inch or 4 inch round, octagon or square junction box or shallow pan box eliminating the need for recessed housing. Simply remove the twist lock diffuser and set your included captive screws.

SPECIFICATION		
MODEL NO	ML-TH-DL-4	ML-TH-DL-6
Nominal Wattage(W)	10W	15W
Lumens Delivered(LM)@2700K	750	1200
Equivalency	60W INC	75W INC
Efficiency(LM/W)	75	80
Beam Angle	100°	
CRI	>80, Optional >90	
Color Temperature(K)	Single 2700K, 3000K, 4000K, 5000K; 3CCT Available	
L70 Lifetime(Hrs)	>50,000	
Voltage	120VAC	
Dimming	Triac/ELV 10%-100%	
Power Factor	>0.9	
Housing	Matte White, Black or Brush Nickel Aluminum	
Lens	PC	
Mounting	Surface Mount Ceiling Onto 3" & 4" Junction Boxes; Accessories for 4"/5"/6" Recessed Housing	
Operating Temperature	-4°F to 104°F	
Certificates	cETLus, Energy Star, Title 24	
Environment	Indoor & Outdoor, Wet Location	
Warranty	5 Years Limited	


Compatibility

Installs into standard J-box applications:

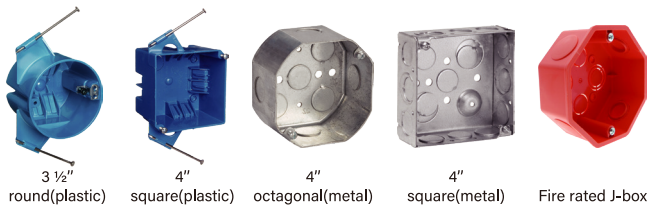

Housing Installation

Insert the torsion springs into metal brackets inside the recessed housing (5" or 6") or simply slide friction clips into housing (4").

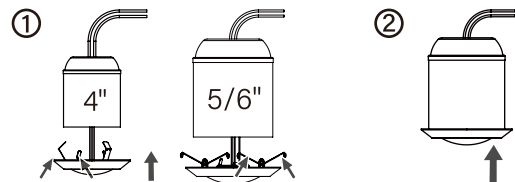

PRODUCT DIMENSIONS:

