

ML-WM-228X Series

LED WALL PACK

DESCRIPTION

Full cut-off architectural wall pack is aesthetically pleasing yet still provides a powerful effect in any environment. Half Moon in shape, this lighting gives a forward throw lighting distribution that is created by its special optics. The frosted prismatic glass lens also lessens the effect of glare, providing a comfortable experience for users. With a selectable tuner for wattage, this beautifully designed marvel will provide the most efficient led lighting technology to its owners.



Specification Features



LISTING

- UL and CUL listed for wet locations.

Finish

- UV stabilized power coated finish.

HOUSING

- Die-cast aluminum body.

OPTIONS



- Optional photo control with adder
Finish - Bronze / White.

Ordering information



Model No.	System Watts	Input Voltage	CRI	Color Temp	Reflector	Option	Finish	Starting Temp	
ML-WM-2284-65WT-345K-UV	65/45/25W	120-277V	70+	3000K	Forward Throw	BLANK=No Sensor Photocell Occupancy Sensor Emergency Driver 10KV Surge CCTs and wattages to choosefrom	Bronze	-40°C	
ML-WM-2285-65WT-345K-UV				4000K	Wide Throw				
ML-WM-2285-65WT-345K-UD-UV				5000K					
ML-WM-2286-65WT-345K-UV									

* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.


Product description

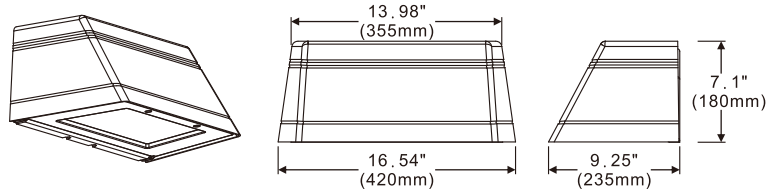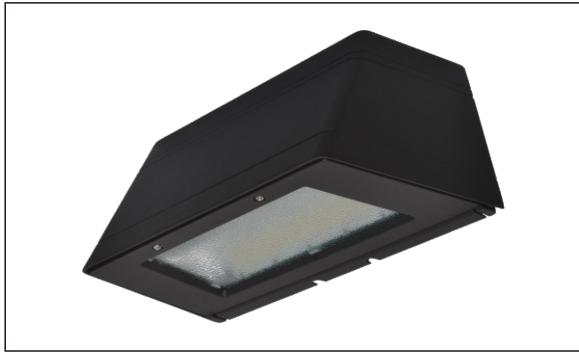

ML-WM-2284-65WT-345K-UV

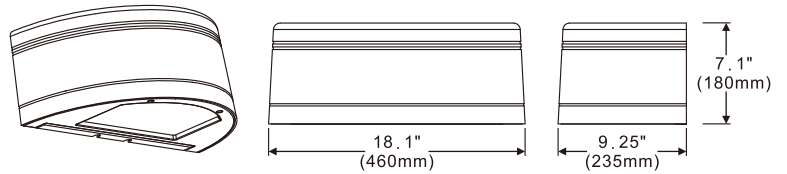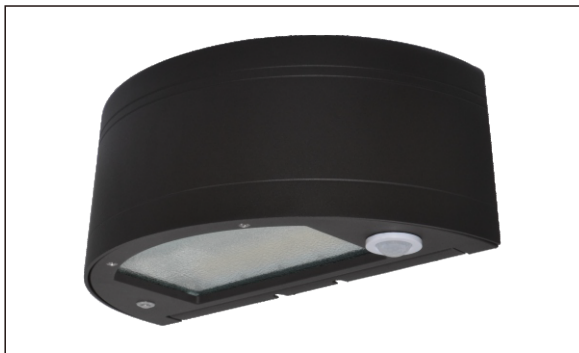

ML-WM-2285-65WT-345K-UV
ML-WM-2285-65WT-345K-UD-UV

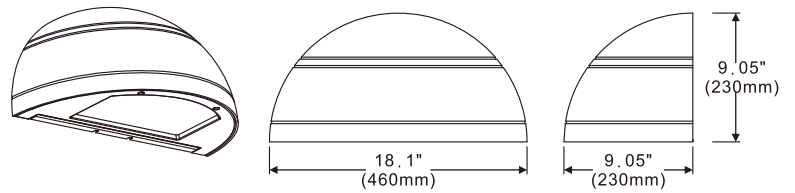

ML-WM-2286-65WT-345K-UV

Performance Data

*Lumen and Efficacy shows the highest wattage at 5000K

Model No.	System Watts	Lumen*	Efficacy*
ML-WM-2284-65WT-345K-UV	65/45/25W	8183 lm*	125 lm/w*
ML-WM-2285-65WT-345K-UV		7993 lm*	123 lm/w*
ML-WM-2285-65WT-345K-UD-UV		10258 lm*	157 lm/w*
ML-WM-2286-65WT-345K-UV		8003 lm*	124 lm/w*

* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.