



**ML-WM-5563**

**LED SURFACE MOUNT LIGHT**

**DESCRIPTION**

This ruggedly designed prismatic wall lighter effectively diffuses and distributes the highly efficient led output to maximize spread and utilization while minimizing wattage consumption. Ideal for energy retro rebates when replacing 70W or lower Metal Halide or HPS.



**Specification Features**



**LISTING**

- ▶ UL and CUL listed for wet locations

**LENS**

- ▶ High impact polycarbonate frosted lens

**FINISH**

- ▶ UV stabilized power coated finish

**OPTIONS**

- ▶ Optional photo control with adder  
Finish - Bronze / White




**Ordering information**

Model No.	System Watts	Input Voltage	CRI	Color Temp	Lumen Output	Lpw	Starting Temp
ML-WM-5563-13W-5K-UV	13W	120-277V	70+	5000 K	1610 lm**	124 lm/W	-40°C

\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

**Product** Dimensions

---

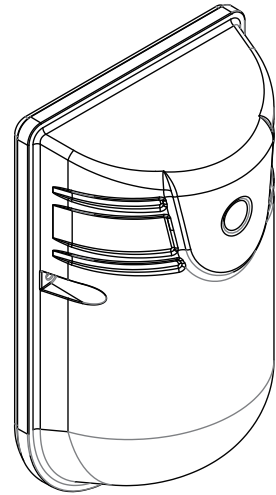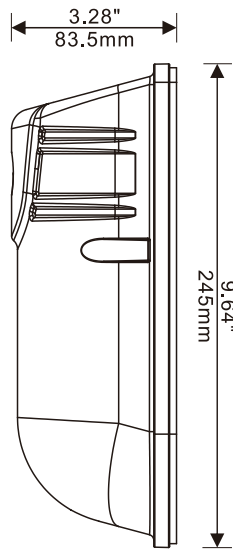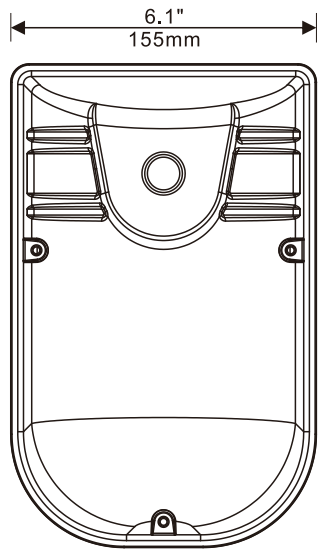

**Available** Mounting Options

---



Optional photo control