

ML-WM-8273

LED WALL PACK

DESCRIPTION

LED Wallpack provides efficient lighting to where you needed most. While keeping the very popular traditional appearance, this wallpack has transformed the lighting landscape with one of most powerful lumen performance. With an integrated Wattage and Color Selectability, this wallpack can be used in any harsh environment while providing the safest lighting conditions.



Specification Features



Construction

► Industrial grade die-cast aluminum alloy body is tough on the elements and allow the luminaire to withstand the harshest of conditions.

Optical System

► Next generation LEDs combined with the best-in-class UV stablized commercial grade polycarbonate lens provide the most efficient lighting system. Optical system is engineered to provide professional grade light distribution and uniformity.

Electrical

► Long lasting LED coupled with UL Listed Drivers provide an electrical system that will stand the test of time. Universal voltage allow the luminaire to be used in multi-faceted environments

Finish

► Luminaire is electrostatically coated with UV stabilized powder coat providing years of worry-free service.

Certification

► cUL and UL Listed. Listed for Wet Locations. DLC Premium certified.

Ordering information

Model No.	Nominal Watts**	Input Voltage	CRI	Color Temp	Option	Finish	Starting Temp
ML-WM-8273-46WT-345K-UV	46W	120-277V	70+	5000K	10kV Surge	Bronze	-40°C ~ +40°C
ML-WM-8273-71WT-345K-UV	71W			4000K	20kV Surge		
ML-WM-8273-100WT-345K-UV	100W			3000K	Photocontrol Emergency Driver		

* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Product Description



High impact polycarbonate.





Included Quick Mount Plate for easy and contractor friendly installation.



Patented Smart Controller

New smart controller makes it easy to select from a range of wattages and CCTs, making this a truly versatile wallpack.

Product Dimensions

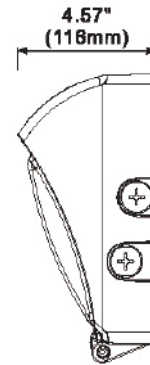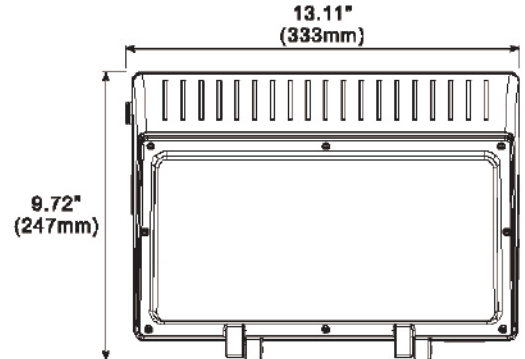

Performance Data

* Lumen and Efficacy shows the highest wattage at 5000K

Model No.	Nominal Watts**	Lumens**	Efficacy**
ML-WM-8273-46WT-345K-UV	16/30/42/46W	6520 lm*	138 lm/W*
ML-WM-8273-71WT-345K-UV	21/41/61/71W	9886 lm*	138 lm/W*
ML-WM-8273-100WT-345K-UV	32/62/92/100W	14075 lm*	138 lm/W*

* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.