


LG Hausys

sign & graphic materials

LP2812/LP2842

Monomeric Protective Laminate

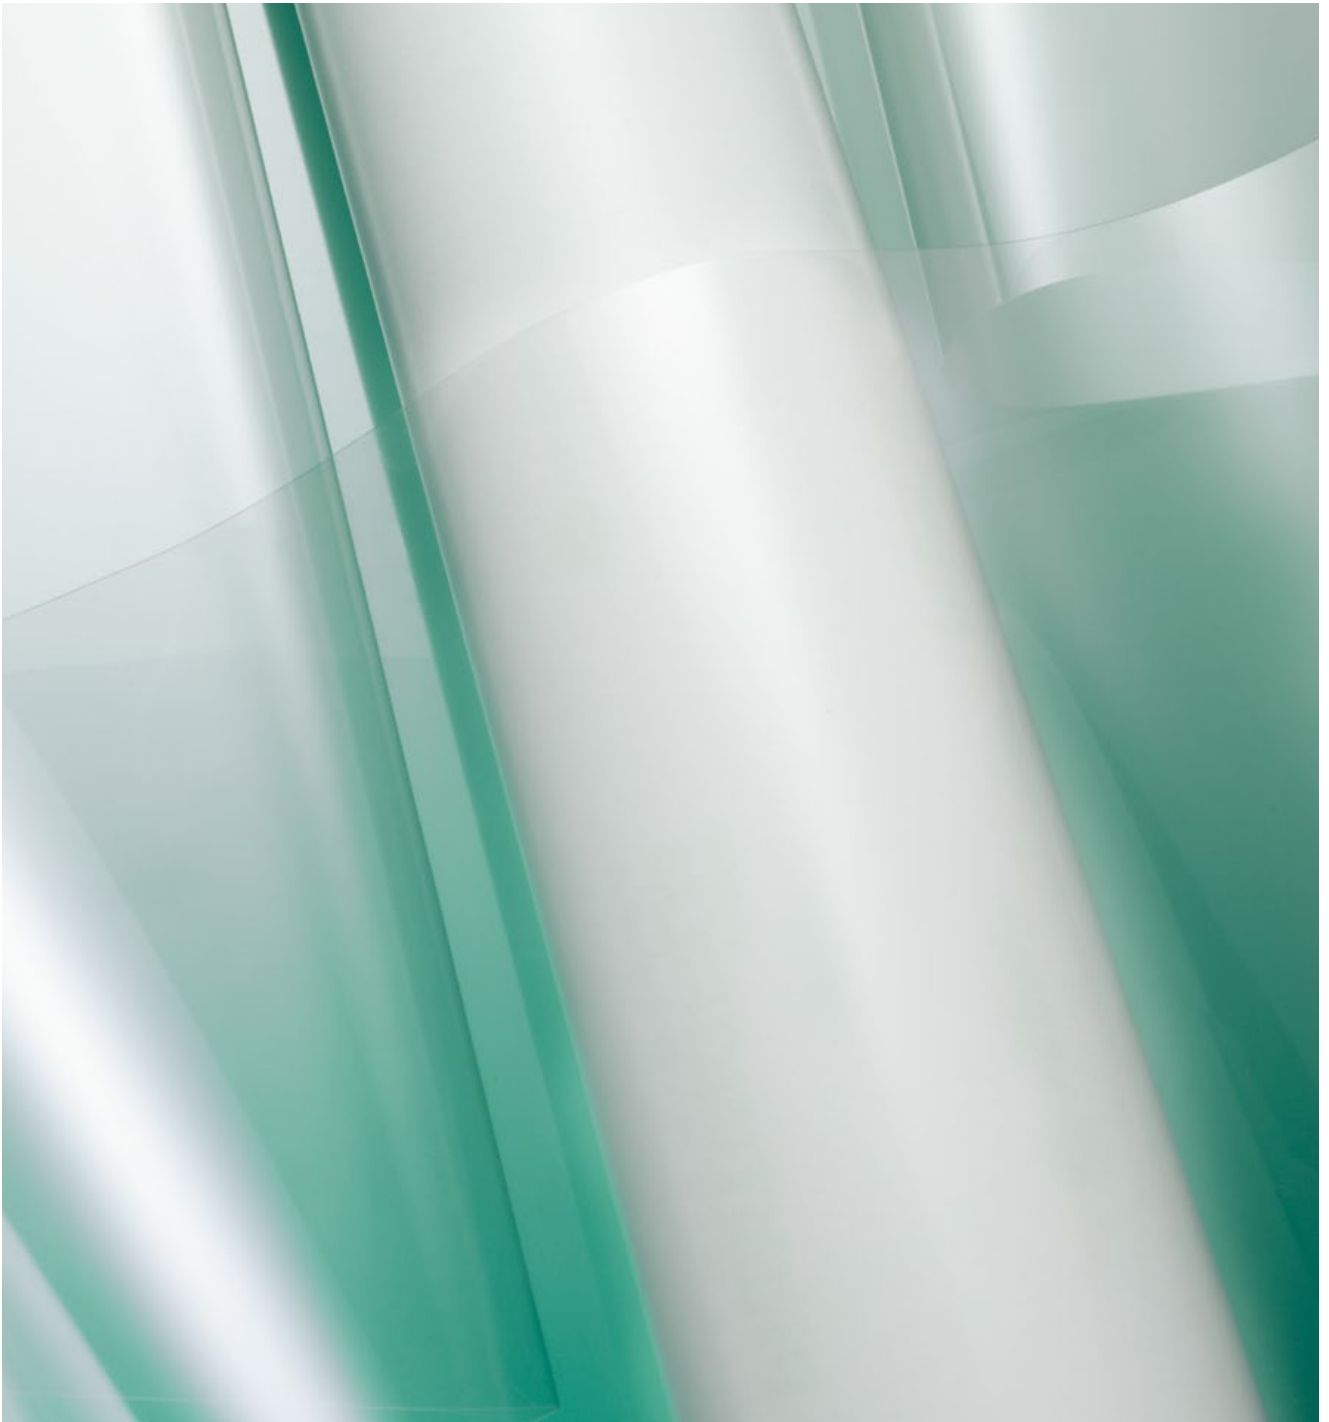

Dated: 7.2012

LG Hausys

sign & graphic materials

LP2812/LP2842

Monomeric Protective Laminate

Type	LP2812	LP2842
Production	Electro cut, hand cut, kiss cut, die cut	
Application Period	Short- and medium term applications	
Colors	Transparent	
Adhesive	Pressure sensitive, transparent, permanent, acrylic based.	
Film Coat	PVC	
Production Process	Monomeric calendered	
Thickness	0.07 mm	
Service Temperature Range	-45 °C – +82 °C	
Application Temperature	Minimum +10 °C	
Durability	2 years	
Removability	Permanent	Removable
Compatible Products	Compatible with the base films LD2700/2740 and LD2800/2840.	



LG Hausys Europe GmbH
 Lyoner Straße 15, ATRICOM C6
 60528 Frankfurt am Main
 Germany
 Phone: 0049 69 -58 30 29 441
 Fax: 0049 69 -66 11 35 06
 Email: sign@lghausys.eu
 Web: <http://sign.lghausys.eu/en>