## QL-800 / QL-810W / QL-820NWB





## Professional label printer range

- Print in black and red to highlight important information.
- Wide range of connectivity options.
- PC, Mac, iOS and Android compatibility.
- High speed printing of up to 110 labels per minute.
- Use continuous rolls and cutter to print labels up to one metre in length.
- Stand-alone printing function where no PC required ideal for food and retail applications.

















## **Versatile labelling options**

Boasting the highest print speeds and the most connectivity options in their class, the QL-800 series label printers are the ideal solution for many types of business.

#### Print black and red\* text without ink

Draw attention to important information by including red as well as black on your labels - ideal for highlighting use-by dates, allergens and other critical information.





#### Wide range of connectivity options

All models allow easy connection to desktop computers using USB. Additionally the QL-810W incorporates Wi-Fi, while the flagship QL-820NWB also adds Ethernet and Bluetooth connectivity.

#### Create labels the size you need

Labels are available in a range of traditional die-cut (pre-sized), or continuous rolls that lets the built-in cutter trim your label to the precise length needed (up to one metre).





#### Print from desktop and mobile devices, or stand-alone

All models are PC/Mac compatible, whereby the QL-810W and QL-820NWB connect to smartphones and tablets using the built-in wireless connections. Additionally you can select and then print labels stored in the memory of the QL-820NWB using the large LCD display and integrated control panel.

 $<sup>^{\</sup>star}$  Requires DK-22251 continuous roll to print in black and red

The QL-800 series professional label printers offer unrivalled versatility not only in the office, but also retail, food, postal, facilities management and other industries.

Create labels with black and red\* print up to one metre in length, from PC, Mac, iOS\*\* or Android\*\* devices. Several wired and wireless connectivity options are available, and even the ability to directly print labels stored in the printer's memory using the integrated LCD/control panel on the QL-820NWB, or external devices connected to the printer.

For developers and systems integrators looking to incorporate label printing as part of their solutions, software development kits for Windows, iOS and Android offer an easy way to add support for the Brother QL-800 series label printers.



## **Summary of features**







	QL-800	QL-810W	QL-820NWB
Fast print speed – number of labels per minute	93	110	110
Print labels with both black and red* print	•	•	•
Advanced label design software for PC/Mac (P-touch Editor)	•	•	•
Built-in label design software for PC/Mac that requires no software or driver installation (P-touch Editor Lite)	•	•	
USB	•	•	•
Wi-Fi with AirPrint		•	•
Wired Ethernet			•
Bluetooth for easy connection to iOS/Android devices			•
Stand-alone printing of labels stored in printer memory			•
Optional li-ion battery for printing away from power sources		•	•
Software Development Kits available for Microsoft Windows***, iOS and Android devices to add label printing to your own solutions	•	•	•

<sup>\*</sup> Requires DK-22251 continuous roll to print in black and red

<sup>\*\*</sup> Red print capability from iPrint&Label app available summer 2017 \*\*\* QL-800 only supports Microsoft Windows SDK

## **Advanced functionality**

The QL-820NWB with its stand-alone print function and remote FTP template update allows label printing directly from the control panel. Plus advanced connectivity options offer the widest compatibility with all types of devices.

## Stand-alone label printing

The QL-820NWB has a large memory to store label templates designed in P-touch Editor. Label templates can be uploaded to the printer's memory, and accessed using the integrated control panel and backlit graphic LCD display. Ideal for printing current or future date/time on labels in the food and retail industries.





## Remote template update via FTP

Where the QL-820NWB is deployed at multiple locations, updating the templates in all printers would normally be a time intensive operation. However the printer can automatically connect using FTP to a remote server, and if new templates are found, update these automatically. This helps companies save time and money, and ensures consistent operation at all remote sites. All this directly from the printer via the internet, without needing a PC connection.

## AirPrint\* and Bluetooth with MFi (Made for iPod/iPhone/iPad) compatibility

The QL-810W and QL-820NWB both support Apple AirPrint\* to enable printing from compatible apps on iOS devices and Mac. Additionally, the QL-820NWB offers Bluetooth connectivity to easily connect iOS and Android devices to the printer.



<sup>\*</sup> iOS and macOS only supports black print when using the default AirPrint function, however red print capability is available from iOS devices when using AirPrint with apps developed using the Brother Software Development Kit.

## **Software solutions**

With label design apps for desktop PC's and mobile devices, and SDK's to integrate the QL range into your own applications, you can choose the best option for your label printing needs.



#### P-touch Editor Lite\* / P-touch Editor Lite LAN\*

Built inside the QL-800 and QL-810W, this easy to use label design software works without the need to install software or drivers. Working like a USB flash drive, simply connect to your PC/Mac using USB, and launch the software from the drive that appears. Include images, frames and any of your fonts on your label design and print! A version for network connected models is also available - simply run the software to allow many PC's in an office to print labels to the one printer. Again, no installation needed.

#### P-touch Editor with Microsoft Office add-in

Design professional labels including images and logos, barcodes and frames. Link to data contained in Excel or .csv files, to print many labels quickly and efficiently. The Microsoft Office add-in lets you highlight, click and print right from within Word, Excel or Outlook.





## Brother iPrint & Label app\*\* for iOS and Android smartphones/tablets

Print labels on the QL-810W and QL-820NWB using the free iPrint&Label app. Connect via Wi-Fi or Bluetooth (on QL-820NWB), and choose one of the pre-defined templates or quickly design your label from scratch. This free app is available from your mobile device's app store by searching "Brother iPrint&Label"


#### Software Development Kits for Windows, iOS and Android

System integrators and software developers can now take advantage of various Brother SDK's that allow easy integration of label printing directly within their own apps and software. For more information please visit http://www.brother.eu/developer



<sup>\*</sup> Black print capability only. Use P-touch Editor for black and red printing

<sup>\*\*</sup> Red print capability from iPrint&Label app available summer 2017

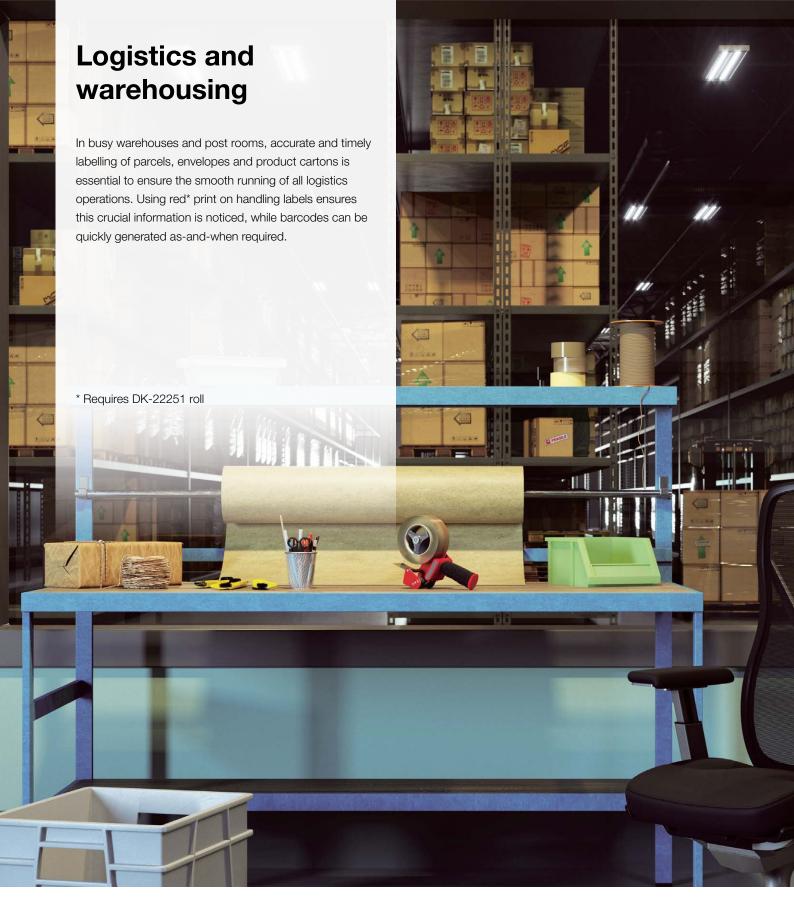










Handling labels

Temporary signage

Shipping labels

Product packaging

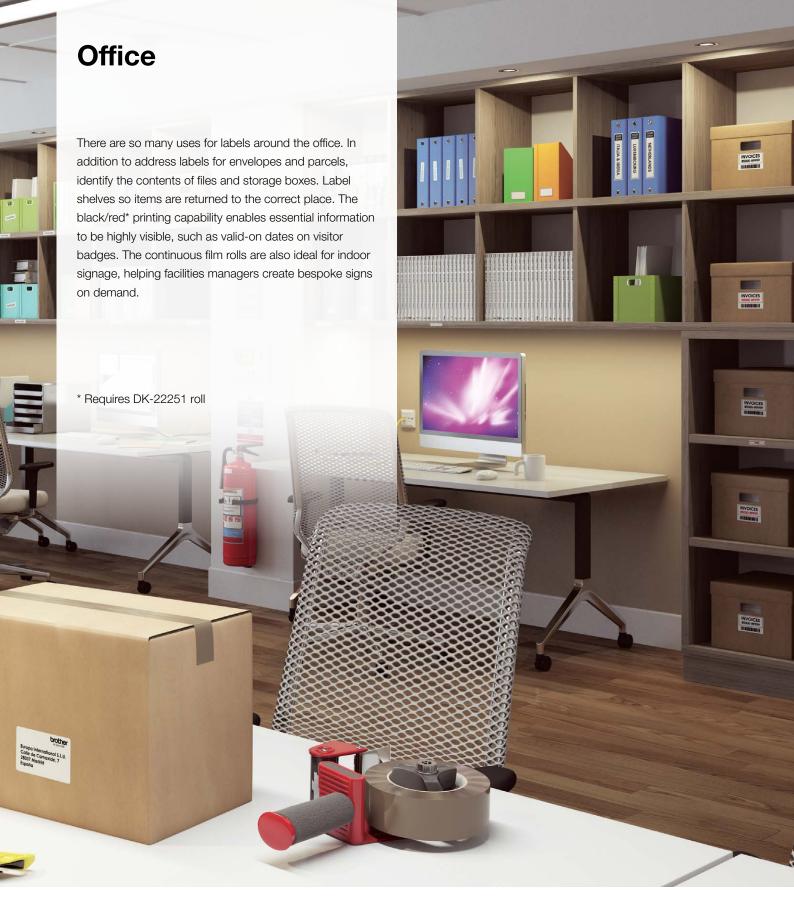









Visitor badges Postage labels Document filing Indoor signage



# DK rolls for the QL-800 label printer range

Wide range of labels available in paper and plastic film material, pre-sized labels or continuous rolls

DK Die-Cut Labels	Material	Colour	Size	Item No.
Standard address label (400/roll)	Paper	White	29 x 90 mm	DK-11201
Large address label (400/roll)	Paper	White	38 x 90 mm	DK-11208
Small address label (800 roll)	Paper	White	29 x 62 mm	DK-11209
Shipping label (300/roll)	Paper	White	62 x 100 mm	DK-11202
File folder label (300/roll)	Paper	White	17 x 87 mm	DK-11203
Multi-purpose label (400/roll)	Paper	White	17 x 54 mm	DK-11204
Square label (1000/roll)	Paper	White	23 x 23 mm	DK-11221
CD/DVD label (100/roll)	Film	White	58 mm	DK-11207
Round label (1200/roll)	Paper	White	12 mm	DK-11219
Round label (1000/roll)	Paper	White	24 mm	DK-11218

DK Continuous-Length Tapes - 30.48m	Material	Colour	Size	Item No.
Continuous-length	Paper	White	12 mm	DK-22214
Continuous-length	Paper	White	29 mm	DK-22210
Continuous-length	Paper	White	38 mm	DK-22225
Continuous-length	Paper	White	50 mm	DK-22223
Continuous-length	Paper, non-adhesive	White	54 mm	DK-N55224
Continuous-length	Paper	White	62 mm	DK-22205
Continuous-length	Paper, removable	White	62 mm	DK-44205
Continuous-length	Paper, removable	Yellow	62 mm	DK-44605

DK Continuous-Length Tapes - 15.24m	Material	Colour	Size	Item No.
Continuous-length	Film	White	29 mm	DK-22211
Continuous-length	Film	White	62 mm	DK-22212
Continuous-length	Film	Yellow	62 mm	DK-22606
Continuous-length	Film	Clear	62 mm	DK-22113
Continuous-length - Black/Red print	Paper	White	62 mm	DK-22251


## **Accessories**

## Optional rechargeable battery unit (PA-BU-001)

This li-ion rechargeble battery unit mounts to the base of the QL-810W and QL-820NWB to offer label printing away from power sources. This makes it ideal for use on trollies or carts, or for exhibition badge printing. Features a fast-charge of under 2 hours 30 minutes, and the capability to print up to 4,300 labels (mono) or 1,400 labels (colour) per charge\*.



<sup>\*</sup> Continuous printing using USB when fully charged

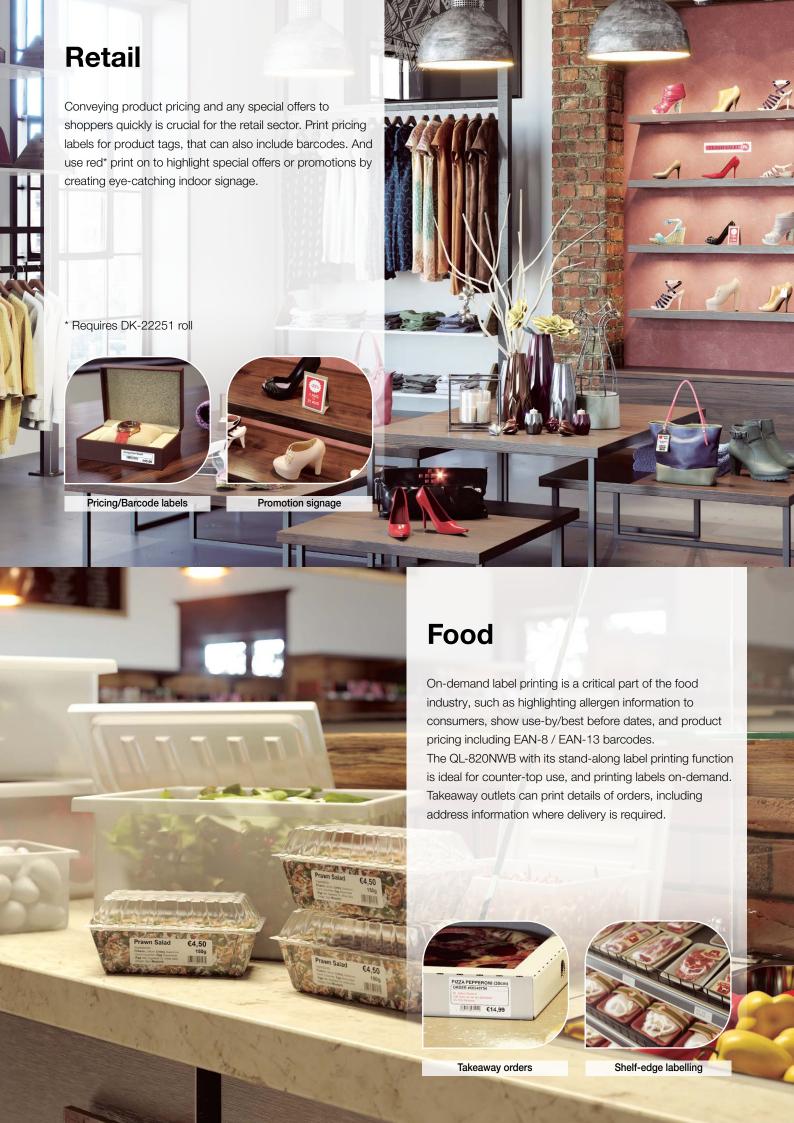

# **Specifications**

	QL-800	QL-810W	QL-820NWB	
Included items				
In the box	Printer Standard address die-cut labels (100 labels) 2-colour print continuous roll (62mm x 5 metres) USB cable AC power cord Documentation	Printer Standard address die-cut labels (100 labels) 2-colour print continuous roll (62mm x 5 metres) USB cable AC adapter and power cord Documentation		
Software / Firmware				
Operating system support (visit http://support.brother.com for latest downloads and support)	Microsoft® Windows Vista®/ Windows® 7 / Windows® 8 Windows® 8.1 / Windows® 10 macOS X v 10.10 / 10.11 / 10.12 Android 4.1 or higher	Microsoft® Windows Vista®/ Windows® 7 / Windows® 8 Windows® Windows® 10 Windows Server® 2008 / 2008 R2 / Windows® Server 2012 / 2012 macOS X v 10.10 / 10.11 / 10.12 Android 4.1 or higher (SDK) iOS 6, 7, 8, 9, 10 or higher (SDK only) iOS 8, 9, 10 or higher (iPrint & Label)		
SDK availability (visit http://www.brother.eu/developer)	b-PAC (for Windows)	b-PAC (for Windows)  Brother Print SDK for Android™  Brother Print SDK for iPhone/iPad (for iOS)		
Supported printer commands	Raster	Raster ESC/P P-touch Template		
Barcode symbologies (using P-touch Editor)	ISBN-2(EAN13 AddOn2), ISBN-5 Truncated, RSS14 Stacked, RSS PDF417(Standard, Truncate, Micro), N RSS symbols / CODE93 / POSTNET	CODE39, CODE128, UCC/EAN128(GS1-128), ITF(I-2/5), CODABAR(NW-7), UPC-A, UPC-E, EAN13, EAN8, ISBN-2(EAN13 AddOn2), ISBN-5(EAN13 AddOn5), Laser Barcode, POSTNET, RSS(RSS14 Standard, RSS14 Truncated, RSS14 Stacked, RSS14 Stacked Omni, RSS Limited, RSS Expanded, RSS Expanded Stacked), PDF417(Standard, Truncate, Micro), QR code(Model1, Model2, Micro), Data Matrix(ECC Square, ECC Rectangular), MaxiCode(Model2, Model3, Model4, Model5)  SS symbols / CODE93 / POSTNET / UPC/EAN EXTENSION / MSI / QR Code (model 1, model 2, micro QR)PDF417 (Standard, Truncate, MicroPDF417) / Data Matrix(ECC200 Square, ECC200 Rectangular) / MaxiCode / Aztec		
Barcode symbologies (Built-in printer firmware)	-	UPC-A, UPC-E, EAN13(JAN13), E Omnidirectional,GS1 DataBar Trunca Stacked Omnidirectional,GS1 DataE DataBar Expanded Stacked), PE Code(Model 1, Model 2, Micro), E	8(GS1-128), ITF(I-2/5), CODABAR(NW-7), CAN8, GS1 DataBar(RSS)(GS1 DataBar ated, GS1 DataBar Stacked, GS1 DataBar Bar Limited, GS1 DataBar Expanded, GS1 DF417(Standard, Truncate, Micro), QR Data Matrix (ECC200 Square, ECC200 E93, POSTNET, UPC-E EXTENTION	
Internal fonts	-	Font sizes: Outline fonts: Letter Go	lelsinki, Brussels, San Diego, Brougham 24, 32, 49 dots thic Bold, Helsinki, Brussels 400 dots (22 sizes)	
System Requirements PC / Mac				
Operating System	M	Windows Vista® / Windows® 7 - 8 - 8.1 lac OS X v10.9.x - 10.10.x - 10.11.x - 1 ver® 2008 / 2008 R2 / Windows® Serve	0.12.x	
Interface	Windows®: USB Port (USB Spec. 1.1, 2.0, or 3.0 protocol) IEEE802.11b/g/n Wireless LAN - 10/100 BASE-TX Wired LAN - Bluetooth 2.1 + EDR Mac: USB Port (USB Spec. 1.1 or 2.0 protocol) IEEE802.11b/g/n Wireless LAN - 10/100 BASE-TX Wired LAN - Bluetooth 2.1 + EDR - MFi			
Hard Disk Requirements	Windows®: 600MB or more ¦ Mac: 500MB or more			
Microsoft Office Support	Microsoft® Word / Excel / Outlook: 2007 - 2010 - 2013 - 2016			

# **Specifications**

Printing / Media         Direct femology         Direct femology         Oracl femology         Control (1900 or 1900 or		QL-800	QL-810W	QL-820NWB	
Printing technology         Detect thems of with 2 concurpent capability           Print speed (lengle colour)         Modernum statimated (lengle colour)	Printing / Media				
Print speed (single colour)         Mixerrum 148mm/see (squideant to 15 labele/mutule)           Print speed (two colour)         Movement 448mm/see (squideant to 15 labele/mutule)           Label widths         12mm - 24mm           Maximum print width         58mm           Maximum print length         1 mm - 24mm           Media sensor type         Parketive           Cutter         Yes full out / gallistins lypse           LOD         DK Rolls (EX de call labels / DK continuous lapel)           LOD         Type           Connectivity         VSS Notes (EX de call labels / DK continuous lapel)           USB         VSS version 2.0 full assout           USB Not capability         9 mm - 25mm/see (SM see version 2.0 full assout)           USB Not capability         9 mm - 25mm/see (SM see version 2.0 full assout)           USB Not capability         9 mm - 25mm/see (SM see version 2.0 full assout)           USB Not capability         9 mm - 25mm/see (SM see version 2.0 full assout)           USB Not capability         9 mm - 25mm/see (SM see version 2.0 full assout)           USB Not capability         9 mm - 25mm/see (SM see version 2.0 full assout)           USB Not capability         9 mm - 25mm/see (SM see version 2.0 full assout)           USB Not capability         9 mm - 25mm/see (SM see version 2.0 full assout)           USB N			Direct thermal with 2 colour print capabili	ty	
Maximum print width	Print resolution	300x300dp	300x300dpi (standard) / 300x600dpi (high resolution mode)		
Description	Print speed (single colour)		Maximum 176mm/s	sec(110 labels/minute)	
Maximum print length         Serim           Maximum print length         1 mate           Media sensor type         Center           Media types         CBR Folk (die de ut leable / DK continuous bywell)           LCD         Type           Connectivity           USB         USB best capability         No. 10 Mil speed           USB Pluetooth         1 Service 20 Mil speed           USB Bluetooth profiles         1 Service 20 Mil speed           Bluetooth profiles         Plue to colspan="3">No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           USB Service 20 Mil speed         No. 10 Mil speed           No. 10 Mil speed	Print speed (two colour)	Maxim	num 24mm/sec (equivalent to 15 labels/i	minute)	
Maximum print length         1 motre           Modia sensor type         Perfective           Cuter         Yes flut out / guilzine types           Modia types         CR Policy Divide out shoels / DK continuous pales           LECD           Type         Sa0x120 dot graphic LCD with coadquit           Connectivity           USB ost capability         Service of the Profession of the P	Label widths		12mm - 62mm		
Media sensor type	Maximum print width		58mm		
Cutter         Yes (ful out / guilotine type)           Media types         DK Rolls (DK de out labels / DK continuous tabel)           LOD           Type	Maximum print length		1 metre		
Media types	Media sensor type		Reflective		
Type	Cutter		Yes (full cut / guillotine type)		
Connectivity         USB version 2.0 full-speed           USB host capability         SPREAD SET (Applied Seption 2.0 full-speed)           Bluetooth         SPREAD SET (Applied Seption 2.0 full-speed)           Bluetooth profiles         SPRPSerial Port Profile) CPPC(Quist Pass) Profile) BEP(Base maping Profile) HCPP(Pleas Capy Cable Replacement Profile) BEP(Base maping Profile) HCPP(Pleas Capy Cable Replacement Profile) APP profile Profile) APP profile Profi	Media types	DK F	Rolls (DK die-cut labels / DK continuous	tape)	
Connectivity         USB version 2.0 full-speed           USB bost capability         USB version 2.0 full-speed           USB host capability         -         Nes (HID class)           Bluetooth         SPP(Serial Port Profile) OPP(Diguée Push Profile) OPP (Diguée Push Profile) INAP profile           iOS and Android compatibility         -         Yes (Wi-F)         Yes (Wi-F) (Wind LAN / Bluetooth)           Wireless LAN         IEEE802.11b/grin           Wireless LAN security (Infrastructure mode)         WEEP WPA.PRKX/MPA.S.PSK (TRIP/AES), LEAP (CIGNP), EAP-FAST (TRIP/AES), EAP-TLS (KIR/PAES), PAPA (TRIP/AES), EAP-TLS (KIR/PAES), EAR-TLS (KIR/PAES), E	LCD				
USB         USB version 2.0 full speed           USB host capability	Туре	-	-		
Siluctooth   Siluctooth   Biluctooth   Biluctooth   Biluctooth   Biluctooth   Biluctooth   Biluctooth   Biluctooth   Biluctooth   Profiles   SPP(Serial Port Profile)   SPP(Serial Port Port Profile)   SPP(Serial Port Port Port Port Port Port Port Port	Connectivity				
Bluetooth   Sluetooth   Sluetooth   Sluetooth   Sluetooth   SPP Serial Port Profile	USB		USB version 2.0 full-speed		
Bluetooth profiles  SP(Serial Port Profile) OPP(Colpic Plush Profile) OPP(Colpic Plush Profile) OPP(Colpic Plush Profile) BP(Basic Imaging Profile) HCRP(Hard Copy Cable Replacement Profile) AP profile AP profile AP profile Replacement Profile) AP profile SP(Serial Port Profile) AP profile Replacement Profile) Replacement Profile) AP profile Replacement Profile) Replaceme	USB host capability	-	-	Yes (HID class)	
COPP(Object Push Profile)   BIP(Basic Imaging Profile)   BIP(Basic Imaging Profile)   BIP(Basic Imaging Profile)   BIP(Basic Imaging Profile)   AP profile   Replacement Profile   AP Profile   Replacement Profile)   AP Profile   Replacement Profile)   AP Profile   Replacement Profile)   AP Profile   AP Profil	Bluetooth	-	-	Bluetooth 2.1+EDR	
Wireless LAN         .         IEEE802.11b/g/n           Wireless LAN security (Infrastructure mode)         .         WEP, WPA-PSK/WPA2-PSK (TKIP/AES), LEAP (CKIP), EAP-FAST (TKIP/AES), LEAP-TLS (TKIP/AES), EAP-TLS (TKIP	Bluetooth profiles			OPP(Object Push Profile) BIP(Basic Imaging Profile) HCRP(Hard Copy Cable Replacement Profile)	
Wireless LAN security (Infrastructure mode)         WEP, WPA-PSK/WPA2-PSK (TKIP/AES), LEAP (CKIP), EAP-FAST (TKIP/AES), PEAP (TKIP/AES), EAP-TLS (TKIP/AE	iOS and Android compatibility	-	Yes (Wi-Fi)	Yes (Wi-Fi / Wired LAN / Bluetooth)	
LEAP (CKIP), EAP-FAST (TKIP/AES), PEAP (TKIP/AES), EAP-TLS (TKI	Wireless LAN	-	IEEE80	2.11b/g/n	
Wired LAN         -         -         10/100 Base-TX           Memory         Flash (for label templates)           Flash (for label templates)         -         6MB           Locations (for label templates)         -         99         255           Power         Power           Power         220-240V AC internal power supply         100-240V AC external adapter (auto switching)           Battery (optional accessory)         -         Li-ion battery including base           Battery print yield         -         4,300 labels (mono) / 1,400 labels (2 colour)           Battery charging time         -         Less than 2 hours 30 minutes           Weights / Dimensions         Dimensions           Dimensions         125(w) x 213(h) x 142(d) mm         125(w) x 234(h) x 145(d) mm	•	-	LEAP (CKIP), EAP-FAST (TKIP/AES), PEAP (TKIP/AES), EAP-TTLS (TKIP/AES),		
Memory       Flash (for label templates)     -     6MB       Locations (for label templates)     -     99     255       Power       Power     220-240V AC internal power supply     100-240V AC external adapter (auto switching)       Battery (optional accessory)     -     Li-ion battery including base       Battery print yield     -     4,300 labels (mono) / 1,400 labels (2 colour)       Battery charging time     -     Less than 2 hours 30 minutes       Weights / Dimensions       Dimensions     125(w) x 213(h) x 142(d) mm     125(w) x 234(h) x 145(d) mm	AirPrint	-	Yes		
Flash (for label templates)   -	Wired LAN	-	-	10/100 Base-TX	
Locations (for label templates)  Power  Power  220-240V AC internal power supply 100-240V AC external adapter (auto switching)  Battery (optional accessory)  Battery print yield  - 4,300 labels (mono) / 1,400 labels (2 colour)  Battery charging time  Weights / Dimensions  Dimensions  125(w) x 213(h) x 142(d) mm  125(w) x 234(h) x 145(d) mm	Memory				
Power 220-240V AC internal power supply 100-240V AC external adapter (auto switching)  Battery (optional accessory) - Li-ion battery including base  Battery print yield - 4,300 labels (mono) / 1,400 labels (2 colour)  Battery charging time - Less than 2 hours 30 minutes  Weights / Dimensions  Dimensions 125(w) x 213(h) x 142(d) mm 125(w) x 234(h) x 145(d) mm	Flash (for label templates)	-	6MB		
Power 220-240V AC internal power supply 100-240V AC external adapter (auto switching)  Battery (optional accessory) - Li-ion battery including base  Battery print yield - 4,300 labels (mono) / 1,400 labels (2 colour)  Battery charging time - Less than 2 hours 30 minutes  Weights / Dimensions  Dimensions 125(w) x 213(h) x 142(d) mm 125(w) x 234(h) x 145(d) mm	Locations (for label templates)	-	99	255	
Battery (optional accessory)  - Li-ion battery including base  Battery print yield  - 4,300 labels (mono) / 1,400 labels (2 colour)  Battery charging time  - Less than 2 hours 30 minutes  Weights / Dimensions  Dimensions  125(w) x 213(h) x 142(d) mm  125(w) x 234(h) x 145(d) mm	Power				
Battery print yield         -         4,300 labels (mono) / 1,400 labels (2 colour)           Battery charging time         -         Less than 2 hours 30 minutes           Weights / Dimensions         Dimensions         125(w) x 213(h) x 142(d) mm         125(w) x 234(h) x 145(d) mm	Power	220-240V AC internal power supply	100-240V AC external	adapter (auto switching)	
Battery charging time         -         Less than 2 hours 30 minutes           Weights / Dimensions         Dimensions         125(w) x 213(h) x 142(d) mm         125(w) x 234(h) x 145(d) mm	Battery (optional accessory)	-	Li-ion battery including base		
Weights / Dimensions         125(w) x 213(h) x 142(d) mm         125(w) x 234(h) x 145(d) mm	Battery print yield	-	4,300 labels (mono) / 1,400 labels (2 colour)		
Dimensions         125(w) x 213(h) x 142(d) mm         125(w) x 234(h) x 145(d) mm	Battery charging time	-	Less than 2 hours 30 minutes		
	Weights / Dimensions				
Weight         1.15kg         1.12kg         1.16kg	Dimensions	125(w) x 213(h) x 142(d) mm	125(w) x 213(h) x 142(d) mm 125(w) x 234(h) x 145(d) mm		
	Weight	1.15kg	1.12kg	1.16kg	















"Made for iPod," "Made for iPhone," and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

iPad, iPhone and iPod are trademarks of Apple Inc., registered in the U.S. and other countries.

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Brother Industries, Ltd. is used under license.

All specifications correct at time of printing. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

www.brother.dk · www.brother.ee www.brother.fi · www.brother.is www.brother.no · www.brother.lv www.brother.it · www.brother.se

Contact:





Brother Nordic A/S

Baldershøj 22, 2635 Ishøj Tlf. +45 43313131 www.brother.dk • info@brother.dk